

JVC Service Bulletin

Model	Service Manual No.	Priority
MX-DK1		()S.All products.
MX-DK3	MB515	()a.Items in JVC dealer stock/service return goods.
MX-DK5	MB523	()b.JVC stock/units returned for service.
MX-DK15	MB543	()c.Sold items returned for service.
MX-DK51	MB543	(X)d.Only units related to this bulletin.
		()e.Others.

SUBJECT: Display "Upgrade Disc" and hanged up

DATE : 13.07.2006

Reasons: Programing bug

Cure: Change R3103 values from 10K to 2.2K and upgrade software.

Model	Symbol NO.	Before	After
MX-DK1/15/3/51/5	R3103	NRSA63J-103X	NRSA63J-222X

Recovery Method

1) Change R3101 values to new value

Refer to next page for R3103 location.

2) Upgrade software

Place upgrade CD-R onto CD tray, off AC supply & on it again.

CD tray will auto close & start reading.

Show on display "Reading" "UPGRD DISC" "UPGRADING"

It takes 7minuttes for updating.

Show on display check sum and CD tray auto open.

Release CD-R disc from CD tray ,off AC & on it again.

Parts Order: To VPT

Upgrade data

Please get it from js net web site for technological material of AVsystem.

<http://cs.jvc-vtb.co.jp>

(MX-DK series Firmware Update Procedure)

* Unzip the data file (double clic the zipped file), and the data file for procedure

* Write the data file for update in CD-R in ISO9660 format with "disc at once"

There are total 4 models in the attached files, choose the correct software when copy for upgrading.

Do not copy folder but only the 2 files in it.

VICTOR COMPANY OF JAPAN , LIMITED.

AV System Category Quality Management Dept.

CS Group.15300


1-10-1,Ohwatari-chou. Maebashi-shi, Gunma-ken.371-8543, Japan Facsimile : 81-27-254-8977 Telephone : 81-27-254-8952

1 5 3 0 0


RE: MX-DK1/15/3 & CA-MXDK5/51 SERIES SET HANG-UP RECOVERY PROCEDURE

1. Change R3101 from NRSA63J-103X to NRSA63J-222X. Refer to picture below for location.

FOR MODEL MX-DK1 / MX-DK15 / MX-DK3 AND CA-MXDK5 ONLY
(GVA10121-A1)

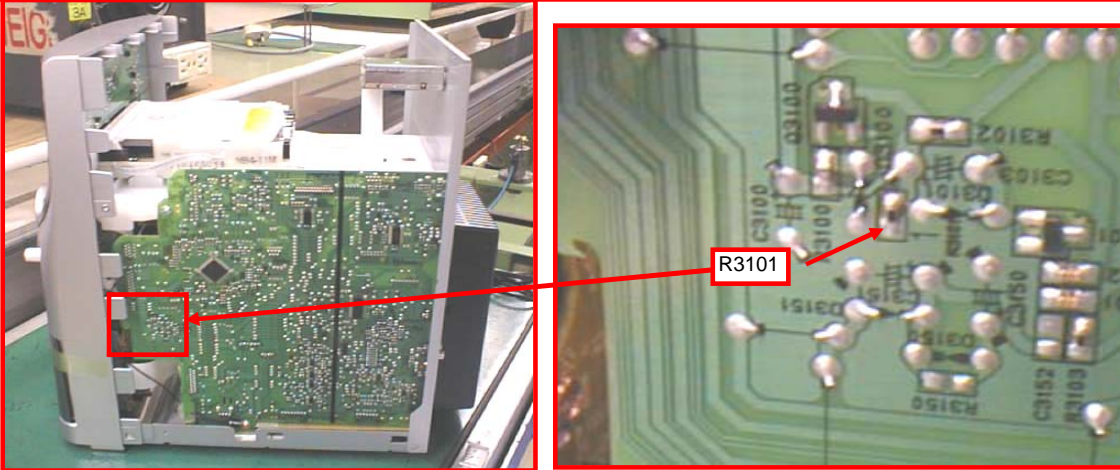

FOR MODEL CA-MXDK51 ONLY
(GVA10122-A1)

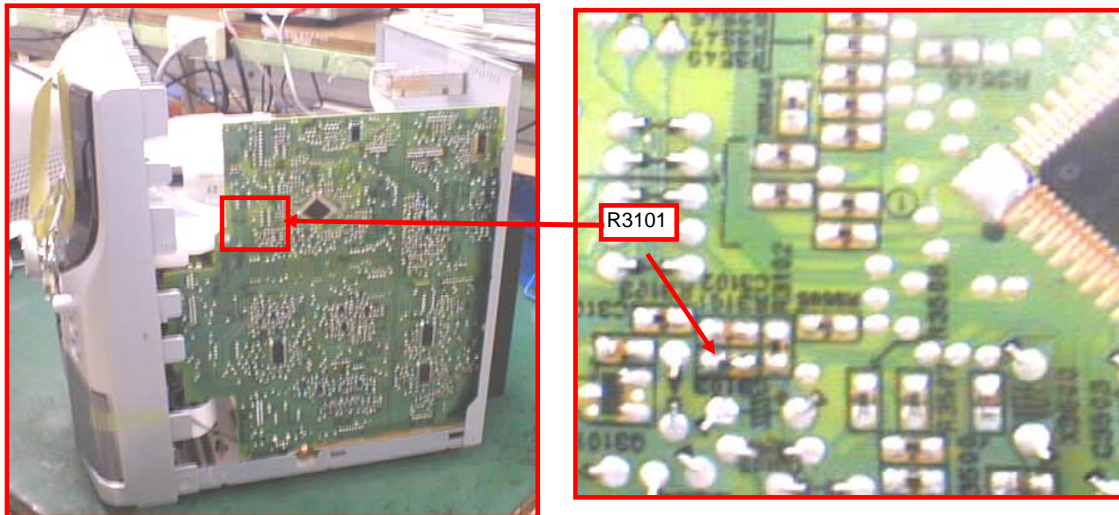

Cut-off serial for MX-DK series

MX-DK1 UN 111C0001 ~
UG 111C4201 ~
UW 111C6201 ~
UX 111C6701 ~
EE 111C1501 ~

MX-DK3 UX 111C0001 ~
UW 111C0501 ~
UG 111C5201 ~
US 111C3001 ~
EE 111C0301 ~

MX-DK15 A 111C0001 ~

CA-MXDK5 l 111C0001 ~
Ee 111C0801 ~

CA-MXDK51 111C0001 ~
U 111C0301 ~
U 111C0501 ~
Ee 111C0701 ~

REMARKS:
AFTER THE REWORK SETS
WILL INDICATE " PINK COLOR DOT"
ON THE COMPUTER LABEL.