

aiwa



NSX-K380

COMPACT DISC
STEREO CASSETTE RECEIVER

- BASIC TAPE MECHANISM: 6ZM-3 PR2NM
- BASIC CD MECHANISM: 4ZG-1 VOS1RDSHM
- TYPE: HR

SIMPLE MANUAL

- Replace this Service Manual with "Revision Publishing" when it is issued.

S/M Code No. 09-991-407-7T1

MANUAL
SERVICE

ELECTRICAL MAIN PARTS LIST - 1/5

NOTE: The characters in the suffix column indicate the part usage.

HRJSTM	REF.NO	PARTS NO.	NO.	DESCRIPTION	SUFFIX
			XX		A
			KANRI		
		82-NF7-210-110		GUIDE,FL (*)	A
*		8Z-NF9-202-010		GUIDE,OPE R	A
C	101	87-A11-140-080		CAP,TC U 0.047-50 K B	A
C	153	87-010-221-080		CAP, ELECT 470-10V	A
C	151	87-A11-142-080		CAP,TC U 0.068-50 K B	A
C	204	87-010-246-040		CAP,E 47-35 SME	A
C	201	87-010-421-040		CAP,E 4.7-50 5L	A
C	202	87-010-421-040		CAP,E 4.7-50 5L	A
C	203	87-010-560-040		CAP,E 10-50 GAS	A
C	205	87-018-205-080		CAP, CERA-SOL 0.022	A
C	210	87-010-060-040		CAP,E 100-16	A
C	213	87-015-695-040		E/CAP 1UF 50V TAPG	A
C	217	87-018-125-080		CAP, CER 330P-50V	A
C	218	87-018-125-080		CAP, CER 330P-50V	A
C	216	87-018-131-080		CAP, CER 1000P-50V	A
C	219	87-018-131-080		CAP, CER 1000P-50V	A
C	212	87-018-205-080		CAP, CERA-SOL 0.022	A
C	214	87-A11-155-080		CAP,TC U 0.01-16 Z F	A
C	211	87-A11-242-040		CAP,E 220-10 M 5L SRM	A
C	221	87-018-105-080		CAP,TC-U 12P-50 SL	A
C	222	87-018-128-080		CAP, CERA-SOL SS 560P	A
C	220	87-018-205-080		CAP, CERA-SOL 0.022	A
C	224	87-018-205-080		CAP, CERA-SOL 0.022	A
C	231	87-015-681-040		E/CAP 10-16	A
C	234	87-A11-140-080		CAP,TC U 0.047-50 K B	A
C	230	87-A11-140-080		CAP,TC U 0.047-50 K B	A
C	232	87-A11-140-080		CAP,TC U 0.047-50 K B	A
C	243	87-018-117-080		CAP,TC-U 68P-50 SL	A
C	242	87-018-117-080		CAP,TC-U 68P-50 SL	A
C	245	87-018-117-080		CAP,TC-U 68P-50 SL	A
C	241	87-018-117-080		CAP,TC-U 68P-50 SL	A
C	244	87-018-117-080		CAP,TC-U 68P-50 SL	A
C	246	87-018-118-080		CAP,TC-U 82P-50 B	A
C	251	87-018-117-080		CAP,TC-U 68P-50 SL	A
C	252	87-018-131-080		CAP, CER 1000P-50V	A
C	701	87-018-115-080		CAP, CER 47P-50V	A
CN	701	87-099-013-010		CONN,11P 6216 V	A
CON	102	87-099-015-010		CONN,13P 6216V	A
CON	101	88-NF9-658-010		CONN,30P BLK TYK-B(P)	A
D	151	87-020-465-080		DIODE,1SS133 (110MA)	A
D	202	87-020-465-080		DIODE,1SS133 (110MA)	A
D	203	87-020-465-080		DIODE,1SS133 (110MA)	A
D	201	87-A40-509-080		ZENER,MTZJ6.8C	A
D	216	87-020-465-080		DIODE,1SS133 (110MA)	A
D	218	87-020-465-080		DIODE,1SS133 (110MA)	A
D	214	87-020-465-080		DIODE,1SS133 (110MA)	A
D	219	87-020-465-080		DIODE,1SS133 (110MA)	A
D	213	87-020-465-080		DIODE,1SS133 (110MA)	A
D	215	87-020-465-080		DIODE,1SS133 (110MA)	A
D	217	87-020-465-080		DIODE,1SS133 (110MA)	A
D	212	87-020-465-080		DIODE,1SS133 (110MA)	A
D	221	87-020-465-080		DIODE,1SS133 (110MA)	A
D	227	87-020-465-080		DIODE,1SS133 (110MA)	A
D	229	87-020-465-080		DIODE,1SS133 (110MA)	A
D	225	87-020-465-080		DIODE,1SS133 (110MA)	A
D	222	87-020-465-080		DIODE,1SS133 (110MA)	A
D	220	87-020-465-080		DIODE,1SS133 (110MA)	A
D	224	87-020-465-080		DIODE,1SS133 (110MA)	A
D	223	87-020-465-080		DIODE,1SS133 (110MA)	A
D	226	87-020-465-080		DIODE,1SS133 (110MA)	A
D	228	87-020-465-080		DIODE,1SS133 (110MA)	A
D	237	87-020-465-080		DIODE,1SS133 (110MA)	A
D	230	87-020-465-080		DIODE,1SS133 (110MA)	A
D	234	87-020-465-080		DIODE,1SS133 (110MA)	A
D	238	87-020-465-080		DIODE,1SS133 (110MA)	A
D	240	87-020-465-080		DIODE,1SS133 (110MA)	A
D	702	87-020-465-080		DIODE,1SS133 (110MA)	A
D	701	87-020-465-080		DIODE,1SS133 (110MA)	A
FL	301	8Z-NF9-610-010		FL,SVA-10MS12	A
IC	202	87-A21-218-010		IC,NJL64H380A	A
IC	201	8Z-NH9-610-010		C-IC,M38B57MCH-E217FP	A
L	201	87-A50-434-010		COIL,CLK 4.19M(TOKO)	A
LED	604	87-A40-619-080		LED,SLR-56PT-TE7-W GRN	A
LED	602	87-A40-619-080		LED,SLR-56PT-TE7-W GRN	A
LED	601	87-A40-619-080		LED,SLR-56PT-TE7-W GRN	A
LED	608	87-A40-619-080		LED,SLR-56PT-TE7-W GRN	A
LED	605	87-A40-619-080		LED,SLR-56PT-TE7-W GRN	A
LED	609	87-A40-619-080		LED,SLR-56PT-TE7-W GRN	A
Q	101	87-026-218-080		TR,DTC144ES (0.2W)	A
Q	102	87-026-218-080		TR,DTC144ES (0.2W)	A
Q	152	87-026-609-080		TR,KTA1266GR	A
Q	151	87-026-610-080		TR,KTC3198GR	A
Q	153	87-026-610-080		TR,KTC3198GR	A
Q	206	87-026-215-080		TR,DTC114YS	A
Q	205	87-026-610-080		TR,KTC3198GR	A
Q	203	87-026-610-080		TR,KTC3198GR	A

ELECTRICAL MAIN PARTS LIST - 2/5

Q	201	87-A30-090-080	FET, 2SK2541	A
Q	202	87-A30-090-080	FET, 2SK2541	A
Q	204	87-A30-090-080	FET, 2SK2541	A
Q	601	87-026-287-080	TR, DTC143ES	A
Q	602	87-026-287-080	TR, DTC143ES	A
Q	605	87-026-287-080	TR, DTC143ES	A
Q	603	87-026-287-080	TR, DTC143ES	A
Q	606	87-026-287-080	TR, DTC143ES	A
Q	604	87-026-287-080	TR, DTC143ES	A
Q	701	87-026-245-080	TR, DTC114ES	A
Q	702	87-A30-240-080	TR, CSA1585BC	A
Q	703	87-A30-318-080	TR, CSA952K	A
Q	704	87-A30-318-080	TR, CSA952K	A
S	201	87-A90-535-010	SW, RTRY EC16B24304	A
S	202	87-A90-791-010	SW, RTRY EC16B12204 ENCODER	A
S	303	87-A90-164-080	SW, TACT SKQAB(N)	A
S	301	87-A90-164-080	SW, TACT SKQAB(N)	A
S	309	87-A90-164-080	SW, TACT SKQAB(N)	A
S	305	87-A90-164-080	SW, TACT SKQAB(N)	A
S	302	87-A90-164-080	SW, TACT SKQAB(N)	A
S	307	87-A90-164-080	SW, TACT SKQAB(N)	A
S	304	87-A90-164-080	SW, TACT SKQAB(N)	A
S	306	87-A90-164-080	SW, TACT SKQAB(N)	A
S	313	87-A90-164-080	SW, TACT SKQAB(N)	A
S	311	87-A90-164-080	SW, TACT SKQAB(N)	A
S	318	87-A90-164-080	SW, TACT SKQAB(N)	A
S	312	87-A90-164-080	SW, TACT SKQAB(N)	A
S	310	87-A90-164-080	SW, TACT SKQAB(N)	A
S	315	87-A90-164-080	SW, TACT SKQAB(N)	A
S	316	87-A90-164-080	SW, TACT SKQAB(N)	A
S	319	87-A90-164-080	SW, TACT SKQAB(N)	A
S	317	87-A90-164-080	SW, TACT SKQAB(N)	A
S	314	87-A90-164-080	SW, TACT SKQAB(N)	A
S	323	87-A90-164-080	SW, TACT SKQAB(N)	A
S	321	87-A90-164-080	SW, TACT SKQAB(N)	A
S	322	87-A90-164-080	SW, TACT SKQAB(N)	A
S	320	87-A90-164-080	SW, TACT SKQAB(N)	A
S	325	87-A90-164-080	SW, TACT SKQAB(N)	A
S	329	87-A90-164-080	SW, TACT SKQAB(N)	A
S	324	87-A90-164-080	SW, TACT SKQAB(N)	A
S	330	87-A90-164-080	SW, TACT SKQAB(N)	A
C	402	87-010-112-040	CAP, E 100-16	A
C	409	87-010-265-040	CAP, E 33-16 SME	A
C	407	87-015-699-040	CAP, E 10-50 7L	A
C	404	87-018-117-080	CAP, TC-U 68P-50 SL	A
C	408	87-018-118-080	CAP, TC-U 82P-50 B	A
C	406	87-A11-144-080	CAP, TC U 0.1-50 K B	A
C	403	87-A11-149-080	CAP, TC U 0.22-50 Z F	A
C	401	87-A11-154-080	CAP, TC U 4700P-16 Z F	A
C	410	87-A11-140-080	CAP, TC U 0.047-50 K B	A
EMI	401	87-008-372-080	FILTER, EMI BL OIRNI	A
J	401	87-A60-651-010	JACK, 3.5MONO	A
Q	404	87-026-609-080	TR, KTA1266GR	A
Q	402	87-026-609-080	TR, KTA1266GR	A
Q	403	87-026-610-080	TR, KTC3198GR	A
Q	401	87-026-610-080	TR, KTC3198GR	A
Q	406	87-026-610-080	TR, KTC3198GR	A
Q	405	87-A30-090-080	FET, 2SK2541	A
VR	401	86-NFA-607-010	VR, RTRY 10K15AX1 1 V XV0121PVN	A
PR	102	87-026-681-080	PROTECTOR, 5A 60V 491	A
PR	101	87-026-681-080	PROTECTOR, 5A 60V 491	A
WH	101	87-A90-459-010	HLDR, WIRE 2.5-5P	A
C	106	87-010-260-080	CAP, ELECT 47-25V	A
C	108	87-010-381-080	CAP, ELECT 330-16V	A
C	107	87-010-384-080	CAP, ELECT 100-25V	A
C	103	87-016-051-090	CAP, E 2200-35 SMG	A
C	105	87-018-127-080	CAP, CER 470P-50V	A
C	101	87-A10-520-090	CAP, E 3300-35 M SMG	A
C	112	87-010-263-080	CAP, ELECT 100-10V	A
C	114	87-010-374-080	CAP, ELECT 47-10V	A
C	113	87-010-403-080	CAP, ELECT 3.3-50V	A
C	111	87-010-430-080	CAP, ELECT 100-63	A
C	116	87-A10-303-080	CAP, M 0.047-50 J	A
C	115	87-A10-303-080	CAP, M 0.047-50 J	A
C	122	87-010-408-080	CAP, ELECT 47-50V	A
C	123	87-010-408-080	CAP, ELECT 47-50V	A
C	152	87-010-394-080	CAP ELECT220-35V	A
D	109	87-020-465-080	DIODE, 1SS133 (110MA)	A
D	108	87-020-465-080	DIODE, 1SS133 (110MA)	A
D	107	87-A40-336-080	ZENER, MTZJ27D T-72	A
D	113	87-020-465-080	DIODE, 1SS133 (110MA)	A
D	117	87-070-274-080	DIODE, 1N4003 SEM	A
D	116	87-070-274-080	DIODE, 1N4003 SEM	A
D	110	87-A40-345-080	ZENER, MTZJ10C	A
D	123	87-A40-455-080	DIODE, RL203 GW	A
D	122	87-A40-455-080	DIODE, RL203 GW	A
D	121	87-A40-455-080	DIODE, RL203 GW	A
D	124	87-A40-455-080	DIODE, RL203 GW	A
Q	108	87-026-609-080	TR, KTA1266GR	A
Q	105	87-026-609-080	TR, KTA1266GR	A
Q	107	87-026-610-080	TR, KTC3198GR	A
Q	109	87-026-610-080	TR, KTC3198GR	A

ELECTRICAL MAIN PARTS LIST - 3/5

Q	102	87-026-610-080	TR,KTC3198GR	A.....
Q	106	87-026-610-080	TR,KTC3198GR	A.....
Q	103	87-026-610-080	TR,KTC3198GR	A.....
Q	104	87-A30-234-080	TR,CSC4115BC	A.....
Q	115	87-026-219-080	TR,DTA144ES (0.3W)	A.....
Q	112	87-026-269-080	TR,DTA114ES	A.....
Q	110	87-026-609-080	TR,KTA1266GR	A.....
Q	111	89-213-702-010	TR,2SB1370 (1.8W)	A.....
RY	101	87-045-389-010	RELAY,OSA-SS-212DM5	A.....
W	101	83-NE2-618-110	F-CABEL,5P-2.5	A.....
WH	102	87-A90-459-010	HLDR,WIRE 2.5-5P	A.....
		87-067-703-010	TAPPING SCREW, BVT2+3-10	A.....
C	207	87-010-546-080	CAP, ELECT 0.33-50V	A.....
C	208	87-010-546-080	CAP, ELECT 0.33-50V	A.....
C	209	87-A11-154-080	CAP,TC U 4700P-16 Z F	A.....
C	213	87-010-260-080	CAP, ELECT 47-25V	A.....
C	214	87-010-260-080	CAP, ELECT 47-25V	A.....
C	211	87-010-403-080	CAP, ELECT 3.3-50V	A.....
C	212	87-010-403-080	CAP, ELECT 3.3-50V	A.....
C	219	87-010-544-080	CAP, ELECT 0.1-50V	A.....
C	217	87-A10-304-080	CAP,M 0.056-50 J	A.....
C	218	87-A10-304-080	CAP,M 0.056-50 J	A.....
C	210	87-A11-154-080	CAP,TC U 4700P-16 Z F	A.....
C	220	87-010-544-080	CAP, ELECT 0.1-50V	A.....
C	229	87-018-123-080	CAP, CER 220P-50V	A.....
C	230	87-018-123-080	CAP, CER 220P-50V	A.....
C	236	87-A11-148-080	CAP,TC U 0.1-50 Z F	A.....
C	235	87-A11-148-080	CAP,TC U 0.1-50 Z F	A.....
C	237	87-A11-155-080	CAP,TC U 0.01-16 Z F	A.....
D	202	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	201	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	206	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	205	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	204	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	209	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	203	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	218	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	217	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	216	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	210	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	219	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	222	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	220	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	221	87-020-465-080	DIODE,1SS133 (110MA)	A.....
J	202	87-A60-238-010	TERMINAL, SP 4P (MSC)	A.....
J	201	87-A60-602-010	JACK,DIA6.3 BLK ST W/SW TC	A.....
L	202	87-003-383-010	COIL,1UH-S	A.....
L	201	87-003-383-010	COIL,1UH-S	A.....
Q	203	87-026-609-080	TR,KTA1266GR	A.....
Q	202	87-026-609-080	TR,KTA1266GR	A.....
Q	201	87-026-609-080	TR,KTA1266GR	A.....
Q	204	87-026-609-080	TR,KTA1266GR	A.....
Q	206	87-026-610-080	TR,KTC3198GR	A.....
Q	208	87-026-610-080	TR,KTC3198GR	A.....
Q	207	87-026-610-080	TR,KTC3198GR	A.....
Q	205	87-026-610-080	TR,KTC3198GR	A.....
Q	209	87-026-610-080	TR,KTC3198GR	A.....
Q	218	87-026-609-080	TR,KTA1266GR	A.....
Q	210	87-026-610-080	TR,KTC3198GR	A.....
Q	216	87-A30-190-080	TR,CC5551	A.....
Q	215	87-A30-190-080	TR,CC5551	A.....
Q	214	87-A30-255-010	TR,2SB1342	A.....
Q	213	87-A30-255-010	TR,2SB1342	A.....
Q	211	87-A30-256-010	TR,2SD1933	A.....
Q	212	87-A30-256-010	TR,2SD1933	A.....
R	223	87-A00-258-080	RES,M/F 0.22-1W J	A.....
R	224	87-A00-258-080	RES,M/F 0.22-1W J	A.....
R	249	87-A00-258-080	RES,M/F 0.22-1W J	A.....
R	250	87-A00-258-080	RES,M/F 0.22-1W J	A.....
C	307	87-010-263-080	CAP, ELECT 100-10V	A.....
C	308	87-010-263-080	CAP, ELECT 100-10V	A.....
C	304	87-018-131-080	CAP, CER 1000P-50V	A.....
C	302	87-018-131-080	CAP, CER 1000P-50V	A.....
C	303	87-018-131-080	CAP, CER 1000P-50V	A.....
C	301	87-018-131-080	CAP, CER 1000P-50V	A.....
C	315	87-010-374-080	CAP, ELECT 47-10V	A.....
C	317	87-010-546-080	CAP, ELECT 0.33-50V	A.....
C	318	87-010-546-080	CAP, ELECT 0.33-50V	A.....
C	311	87-A10-305-080	CAP,M 0.068-50 J	A.....
C	312	87-A10-305-080	CAP,M 0.068-50 J	A.....
C	326	87-018-205-080	CAP, CERA-SOL 0.022	A.....
C	361	87-010-374-080	CAP, ELECT 47-10V	A.....
C	360	87-010-401-080	CAP, ELECT 1-50V	A.....
C	399	87-018-127-080	CAP, CER 470P-50V	A.....
C	401	87-010-544-080	CAP, ELECT 0.1-50V	A.....
C	402	87-010-544-080	CAP, ELECT 0.1-50V	A.....
C	404	87-018-118-080	CAP,TC-U 82P-50 B	A.....
C	403	87-018-118-080	CAP,TC-U 82P-50 B	A.....
C	411	87-010-405-080	CAP, ELECT 10-50V	A.....
C	412	87-010-405-080	CAP, ELECT 10-50V	A.....
C	452	87-010-382-080	CAP, ELECT 22-25V	A.....
C	459	87-018-128-080	CAP, CERA-SOL SS 560P	A.....

ELECTRICAL MAIN PARTS LIST - 4/5

C	458	87-018-131-080	CAP, CER 1000P-50V	A.....
C	461	87-018-126-080	CAP,TC-U 390P-50 B	A.....
C	462	87-018-126-080	CAP,TC-U 390P-50 B	A.....
CN	301	87-A60-620-010	CONN,3P V 2MM JMT	A.....
CN	351	87-A60-625-010	CONN,8P V 2MM JMT	A.....
D	401	87-020-465-080	DIODE,1SS133 (110MA)	A.....
IC	301	87-017-889-010	IC,NJM4558LD	A.....
IC	401	87-017-889-010	IC,NJM4558LD	A.....
L	451	87-007-342-010	COIL,OSC 85K BIAS	A.....
Q	306	87-026-218-080	TR,DTC144ES (0.2W)	A.....
Q	309	87-026-609-080	TR,KTA1266GR	A.....
Q	303	87-A30-090-080	FET,2SK2541	A.....
Q	304	87-A30-090-080	FET,2SK2541	A.....
Q	305	87-A30-091-080	FET,2SJ460	A.....
Q	301	87-A30-091-080	FET,2SJ460	A.....
Q	308	87-A30-091-080	FET,2SJ460	A.....
Q	307	87-A30-091-080	FET,2SJ460	A.....
Q	302	87-A30-091-080	FET,2SJ460	A.....
Q	310	87-026-609-080	TR,KTA1266GR	A.....
Q	443	87-026-609-080	TR,KTA1266GR	A.....
Q	444	87-026-609-080	TR,KTA1266GR	A.....
Q	454	87-026-610-080	TR,KTC3198GR	A.....
Q	453	87-026-610-080	TR,KTC3198GR	A.....
Q	451	87-026-610-080	TR,KTC3198GR	A.....
SFR	452	87-024-355-080	SFR,33K DIA6 H	A.....
SFR	451	87-024-355-080	SFR,33K DIA6 H	A.....
C	602	87-018-195-080	CAP, CER 1200P-16V	A.....
C	601	87-018-195-080	CAP, CER 1200P-16V	A.....
C	617	87-010-260-080	CAP, ELECT 47-25V	A.....
C	616	87-010-260-080	CAP, ELECT 47-25V	A.....
C	611	87-010-545-080	CAP, ELECT 0.22-50V	A.....
C	612	87-010-545-080	CAP, ELECT 0.22-50V	A.....
C	614	87-010-545-080	CAP, ELECT 0.22-50V	A.....
C	613	87-010-545-080	CAP, ELECT 0.22-50V	A.....
C	615	87-018-104-080	CAP,TC-U 10P-50 SL	A.....
CN	602	87-099-194-010	CONN,6P 6216V	A.....
CN	601	88-NF9-657-010	CONN,30P H BLK TYK-B(X)	A.....
D	601	87-A40-466-080	ZENER,MTZJ2.7A	A.....
D	602	87-A40-466-080	ZENER,MTZJ2.7A	A.....
IC	601	87-A20-715-010	IC,M62439SP	A.....
J	601	87-A60-881-010	JACK,PIN 2P MSP 242V05 PBSN	A.....
C	707	87-010-112-080	CAP, ELECT 100-16V	A.....
C	709	87-010-248-080	CAP, ELECT 220-10V	A.....
C	701	87-010-404-080	CAP, ELECT 4.7-50V	A.....
C	705	87-018-131-080	CAP, CER 1000P-50V	A.....
C	704	87-018-131-080	CAP, CER 1000P-50V	A.....
C	706	87-018-131-080	CAP, CER 1000P-50V	A.....
C	708	87-A11-144-080	CAP,TC U 0.1-50 K B	A.....
C	703	87-A11-155-080	CAP,TC U 0.01-16 Z F	A.....
C	702	87-A11-155-080	CAP,TC U 0.01-16 Z F	A.....
C	714	87-010-112-080	CAP, ELECT 100-16V	A.....
C	710	87-010-112-080	CAP, ELECT 100-16V	A.....
C	715	87-018-119-080	CAP, CER 100P-50V	A.....
C	712	87-018-149-080	CAP,TC-U 15P-50 CH	A.....
C	713	87-018-149-080	CAP,TC-U 15P-50 CH	A.....
D	701	87-017-931-080	ZENER,MTZJ5.6B	A.....
IC	701	87-070-127-110	IC,LC72131 D	A.....
L	701	87-005-847-080	COIL,2.2UH(CECS)	A.....
Q	701	87-A30-234-080	TR,CSC4115BC	A.....
X	701	87-A70-061-010	VIB,XTAL 4.500MHZ CSA-309	A.....
C	746	87-A11-155-080	CAP,TC U 0.01-16 Z F	A.....
C	758	87-010-112-080	CAP, ELECT 100-16V	A.....
C	753	87-010-408-080	CAP, ELECT 47-50V	A.....
C	751	87-018-131-080	CAP, CER 1000P-50V	A.....
C	755	87-A11-144-080	CAP,TC U 0.1-50 K B	A.....
C	757	87-A11-155-080	CAP,TC U 0.01-16 Z F	A.....
C	756	87-A11-155-080	CAP,TC U 0.01-16 Z F	A.....
C	762	87-010-400-080	CAP, ELECT 0.47-50V	A.....
C	763	87-010-401-080	CAP, ELECT 1-50V	A.....
C	764	87-010-401-080	CAP, ELECT 1-50V	A.....
C	769	87-010-403-080	CAP, ELECT 3.3-50V	A.....
C	761	87-010-404-080	CAP, ELECT 4.7-50V	A.....
C	766	87-010-407-080	CAP, ELECT 33-50V	A.....
C	765	87-018-115-080	CAP, CER 47P-50V	A.....
C	768	87-A11-147-080	CAP,TC U 0.047-50 Z F	A.....
C	774	87-010-405-080	CAP, ELECT 10-50V	A.....
C	771	87-010-406-080	CAP, ELECT 22-50	A.....
C	773	87-018-131-080	CAP, CER 1000P-50V	A.....
C	770	87-A11-155-080	CAP,TC U 0.01-16 Z F	A.....
C	776	87-A11-155-080	CAP,TC U 0.01-16 Z F	A.....
C	789	87-010-403-080	CAP, ELECT 3.3-50V	A.....
C	785	87-010-405-080	CAP, ELECT 10-50V	A.....
C	786	87-010-405-080	CAP, ELECT 10-50V	A.....
C	788	87-018-196-080	CAP, CER 1500P-16V	A.....
C	787	87-018-196-080	CAP, CER 1500P-16V	A.....
C	783	87-018-199-080	CAP, CER 3300P	A.....
C	784	87-018-199-080	CAP, CER 3300P	A.....
C	790	87-010-403-080	CAP, ELECT 3.3-50V	A.....
D	751	87-020-465-080	DIODE,1SS133 (110MA)	A.....
IC	751	87-A20-913-010	IC,LA1837NL	A.....
L	771	87-A50-266-010	COIL,FM DET-2N(TOK)	A.....
L	772	87-A90-052-010	FLTR,CFMT-450A(TOK)	A.....

ELECTRICAL MAIN PARTS LIST - 5/5

X	751	87-030-354-010	VIB,CF BFU 450C	A.....
C	805	87-A11-144-080	CAP,TC U 0.1-50 K B	A.....
C	807	87-A11-144-080	CAP,TC U 0.1-50 K B	A.....
C	808	87-A11-155-080	CAP,TC U 0.01-16 Z F	A.....
C	813	87-018-131-080	CAP, CER 1000P-50V	A.....
C	901	87-A11-148-080	CAP,TC U 0.1-50 Z F	A.....
C	931	87-010-263-080	CAP, ELECT 100-10V	A.....
C	932	87-010-400-080	CAP, ELECT 0.47-50V	A.....
C	939	87-014-073-080	CAP,PP 4700P-100 J	A.....
C	935	87-A11-155-080	CAP,TC U 0.01-16 Z F	A.....
C	938	87-A11-155-080	CAP,TC U 0.01-16 Z F	A.....
C	937	87-A11-155-080	CAP,TC U 0.01-16 Z F	A.....
C	936	87-A11-155-080	CAP,TC U 0.01-16 Z F	A.....
C	934	87-A11-155-080	CAP,TC U 0.01-16 Z F	A.....
C	940	87-014-051-080	CAPACITOR (PP), 560P	A.....
C	941	87-018-109-080	CAP, CER 22P-50V	A.....
C	943	87-A11-144-080	CAP,TC U 0.1-50 K B	A.....
CF	801	87-008-261-010	FILTER, SFE10.7MA5-A	A.....
D	941	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	981	87-A40-618-080	VARI-CAP,SVC 348(S/T)	A.....
FFE	801	A8-8ZA-190-030	8ZA-1 FEUNM	A.....
J	801	87-A60-202-010	TERMINAL,ANT 4P MSP-154V-02	A.....
J	931	81-754-629-010	CONNECTOR, 2P	A.....
L	801	87-005-847-080	COIL,2.2UH(CECS)	A.....
L	934	87-005-372-080	COIL S 1MHM	A.....
L	933	87-A50-159-010	COIL,10MH K C2B	A.....
L	941	87-A50-022-010	COIL,ANT SW(COI)	A.....
L	942	87-A50-173-010	COIL,OSC SW-N(COI)	A.....
L	981	87-A50-430-010	COIL,ANT MW(3BSW)	A.....
L	982	87-A50-431-010	COIL,OSC MW(3BSW)	A.....
Q	802	87-026-214-080	TR,DTA114YS (0.3W)	A.....
Q	801	87-026-214-080	TR,DTA114YS (0.3W)	A.....
Q	938	87-026-609-080	TR,KTA1266GR	A.....
Q	939	87-026-609-080	TR,KTA1266GR	A.....
Q	934	87-026-610-080	TR,KTC3198GR	A.....
Q	932	87-026-610-080	TR,KTC3198GR	A.....
Q	937	87-026-610-080	TR,KTC3198GR	A.....
Q	935	87-A30-092-080	FET,2SK439E/F	A.....
Q	936	87-A30-164-080	TR,CSC2001K	A.....
Q	931	87-A30-164-080	TR,CSC2001K	A.....
Q	933	87-A30-164-080	TR,CSC2001K	A.....
Q	940	87-026-269-080	TR,DTA114ES	A.....
Q	941	87-026-269-080	TR,DTA114ES	A.....
TC	941	87-011-220-080	TRIMMER CAP 20P VTC	A.....
TC	943	87-011-221-080	CAP, TRIMMER 30P	A.....
FC	102	87-033-147-010	FUSE CLAMP	A.....
FC	101	87-033-147-010	FUSE CLAMP	A.....
SW	101	87-A90-165-010	SW,SL 1-2-3 SWS2301	A.....
T	102	87-A60-317-010	TERMINAL, 1P MSC	A.....
T	101	87-A60-317-010	TERMINAL, 1P MSC	A.....
C	502	87-010-263-040	CAP,E 100-10	A.....
C	506	87-015-686-040	CAP,E 22-25 M 7L SRA	A.....
C	505	87-015-691-040	CAP,E0.1-50 SRA	A.....
C	508	87-015-694-040	E/CAP 0.47-50	A.....
C	501	87-A11-155-080	CAP,TC U 0.01-16 Z F	A.....
C	507	88-710-849-810	CAP,M 0.033-50 J TFL ECQV	A.....
C	503	88-710-849-810	CAP,M 0.033-50 J TFL ECQV	A.....
C	511	87-015-694-040	E/CAP 0.47-50	A.....
C	510	87-A11-132-080	CAP,TC U 0.01-50 K B	A.....
D	501	87-A40-002-080	ZENER,MTZJ5.1C	A.....
IC	501	87-A21-118-040	C-IC,M65855FP	A.....

MECHANICAL PARTS LIST - 1/1

NOTE: The characters in the suffix column indicate the part usage.


HRJSTM	REF.NO	PARTS NO.	NO.	DESCRIPTION	SUFFIX
.....			XX.....		A.....
			KANRI		
		82-NE6-067-010		BADGE,AIWA 30N	A.....
		8Z-NB8-011-110		PANEL,LEFT V-2	A.....
		8Z-NF9-004-010		BOX,CASS 2	A.....
		8Z-NF9-032-010		BOX,CASS 1R	A.....
		8Z-NF9-042-010		PANEL,TOP V-2	A.....
		8Z-NF9-043-010		PANEL,RIGHT S V-2	A.....
		8Z-NH9-001-010		CABI,FR H	A.....
		8Z-NH9-002-010		PANEL,TRAY H	A.....
		8Z-NH9-011-010		CABI,REAR HRJSTM	A.....
		88-NF9-056-010		KNOB,RTRY MIC	A.....
		8Z-NF9-009-010		KNOB,RTRY VOL	A.....
		8Z-NF9-010-010		KNOB,RTRY JOG	A.....
		8Z-NF9-011-010		KEY,POWER	A.....
		8Z-NF9-012-010		KEY,FUN	A.....
		8Z-NF9-016-010		KEY,CD	A.....
		8Z-NF9-017-010		KEY,GEO	A.....
		8Z-NH9-004-010		KEY,OPE VCD R	A.....
		8Z-NH9-008-010		KEY,PBC	A.....
		8Z-NH9-010-010		KEY,ASSY OPE VCD R	A.....
		86-NFZ-001-010		WINDOW,TOP	A.....
		8Z-NF9-005-010		WINDOW,CD	A.....
		8Z-NF9-007-010		WINDOW,CASS 1	A.....
		8Z-NF9-008-010		WINDOW,CASS 2	A.....
		8Z-NH9-005-010		WINDOW,DISP H	A.....
		82-NF5-218-010		SPR-T,EJECT 1 (SIN)	A.....
		82-NF5-219-010		SPR-T,EJECT 2 (SIN)	A.....
		82-NF5-229-010		PLATE,LOCK	A.....
		86-NF9-224-010		SPR-C,LOCK	A.....
		87-NF4-216-010		HLDR,LOCK 1	A.....
		87-NF4-217-010		HLDR,LOCK 2	A.....
		87-NF4-217-110		HLDR,LOCK 2	A.....
		87-NF4-221-010		HLDR,CABLE	A.....
		87-NF8-220-010		DMPR,150	A.....
		88-NF5-208-010		HLDR,PWB-M N	A.....
		8Z-NB8-240-010		COVER, PL	A.....
		8Z-NF9-204-010		PLATE,MIC	A.....
		87-067-641-010		UTT2+3-8(W/O SLOT)BL	A.....
		87-067-689-010		TAPPING SCREW, BVT2+3-8	A.....
		87-067-703-010		TAPPING SCREW, BVT2+3-10	A.....
		87-067-758-010		BVT2+3-12 W/O SLOT	A.....
		87-067-975-010		S-SCREW,IT+4-8	A.....
		87-721-096-410		QT2+3-10 GLD	A.....
		87-721-097-410		QT2+3-12 GLD	A.....
		87-NF4-224-010		S-SCREW,IT3B+3-8 CU	A.....
		87-050-079-010		AC-CORD ASSY,E	A.....
		87-085-185-010		BUSHING, AC CORD (E)	A.....
		88-906-251-110		FF-CABLE,6P 1.25	A.....
		88-911-201-110		FF-CABLE,11P 1.25	A.....
		88-913-221-110		FF-CABLE, 13P 1.25 220MM	A.....
C	902	87-A11-144-080		CAP,TC U 0.1-50 K B	A.....
F	101	87-035-224-010		FUSE, 1.6AT	A.....
PT	101	88-NF9-610-010		PT,8NF-9 HI-HR	A.....
		82-NF7-210-110		GUIDE,FL (*)	A.....
WH	101	87-A90-459-010		HLDR,WIRE 2.5-5P	A.....
W	101	83-NE2-618-110		F-CABEL,5P-2.5	A.....
WH	102	87-A90-459-010		HLDR,WIRE 2.5-5P	A.....
		87-067-703-010		TAPPING SCREW, BVT2+3-10	A.....

ACCESSORIES / PACKAGE LIST - 1/1

NOTE: The characters in the suffix column indicate the part usage.


REF.NO	PARTS NO.	NO.	DESCRIPTION	SUFFIX
HRJSTM		XX		A
		KANRI		
	8Z-NH9-911-010		IB,H(EC-H)M	A
	87-043-095-010		WIRE ANTENNA	A
	87-043-115-010		ANT,FEEDER FM	A
	87-050-103-010		CORD,PIN 1PY1.5M	A
	87-A91-017-010		PLUG,CONVERSION JT-0476	A
	8Z-NH8-702-010		RC UNIT,RC-ZAS07	A
ANT 0	87-006-269-010		AM LOOP ANT (UN)	A

SCHEMATIC DIAGRAM - 1 (MAIN)

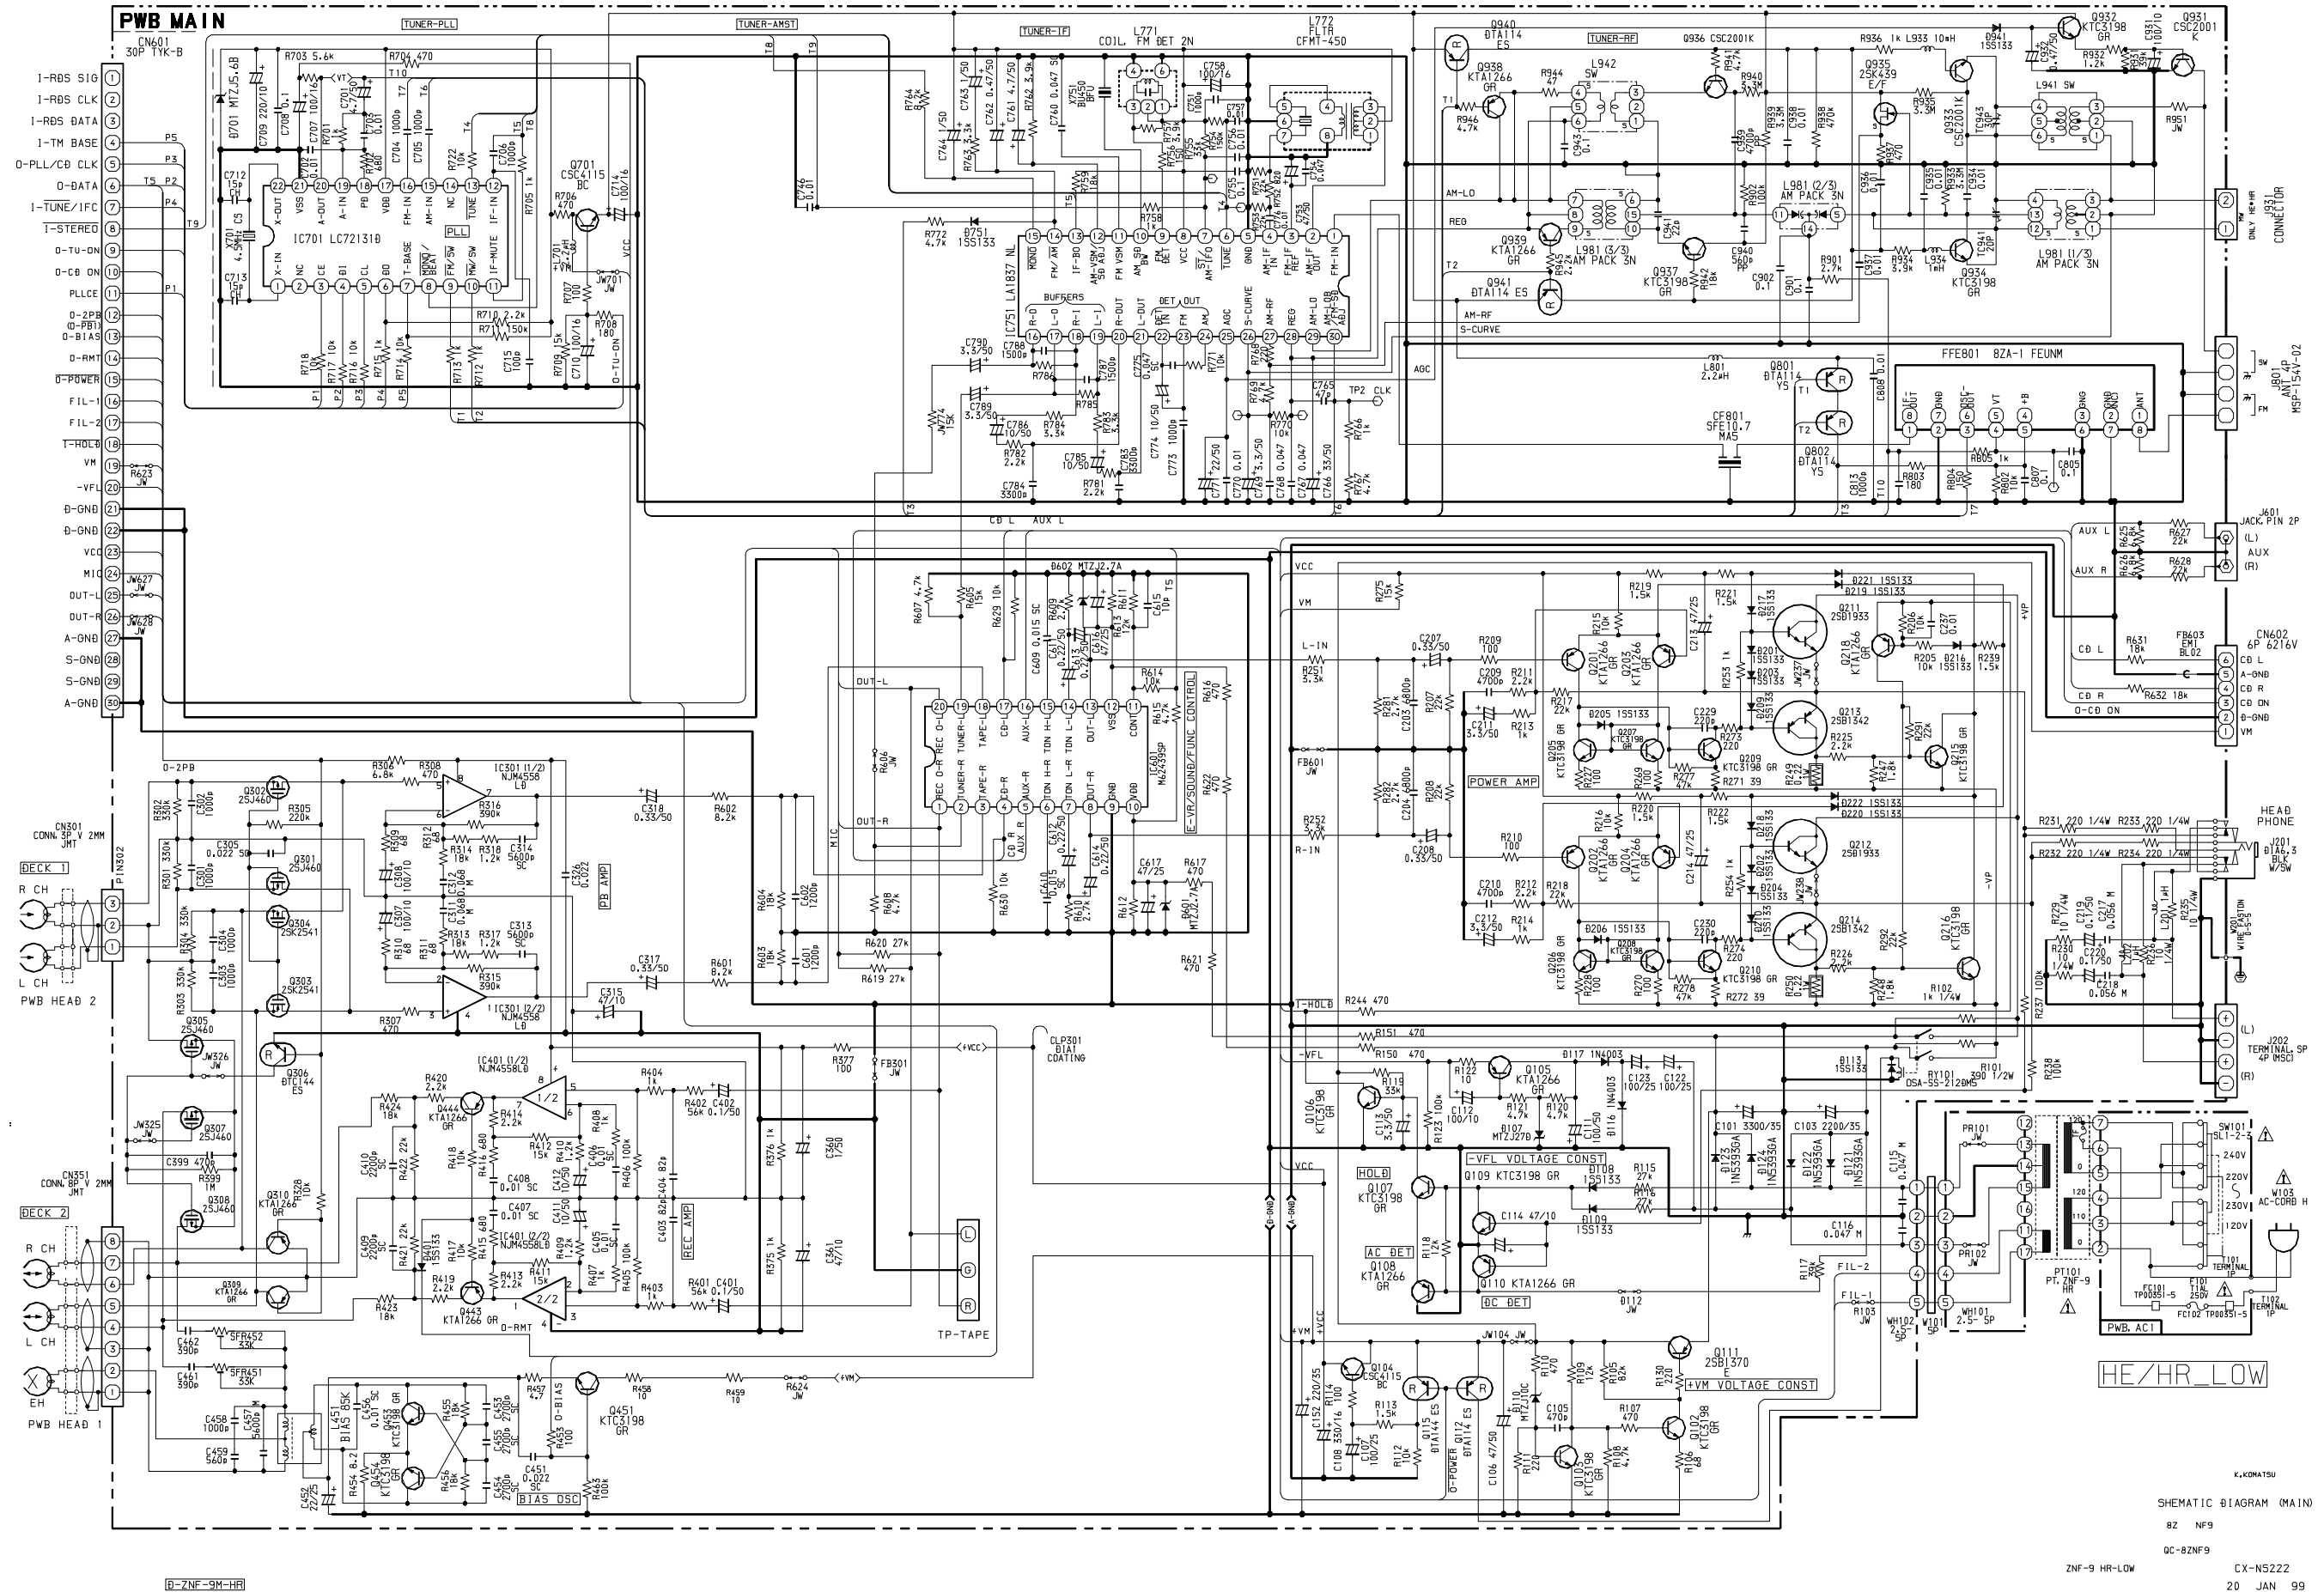

K. KOMATSU
 SCHEMATIC DIAGRAM (MAIN)
 82 NF9
 8C-82NF9
 ZNF-9 HR-LOW CX-N5222
 20 JAN 99

SCHEMATIC DIAGRAM - 2 (FRONT)

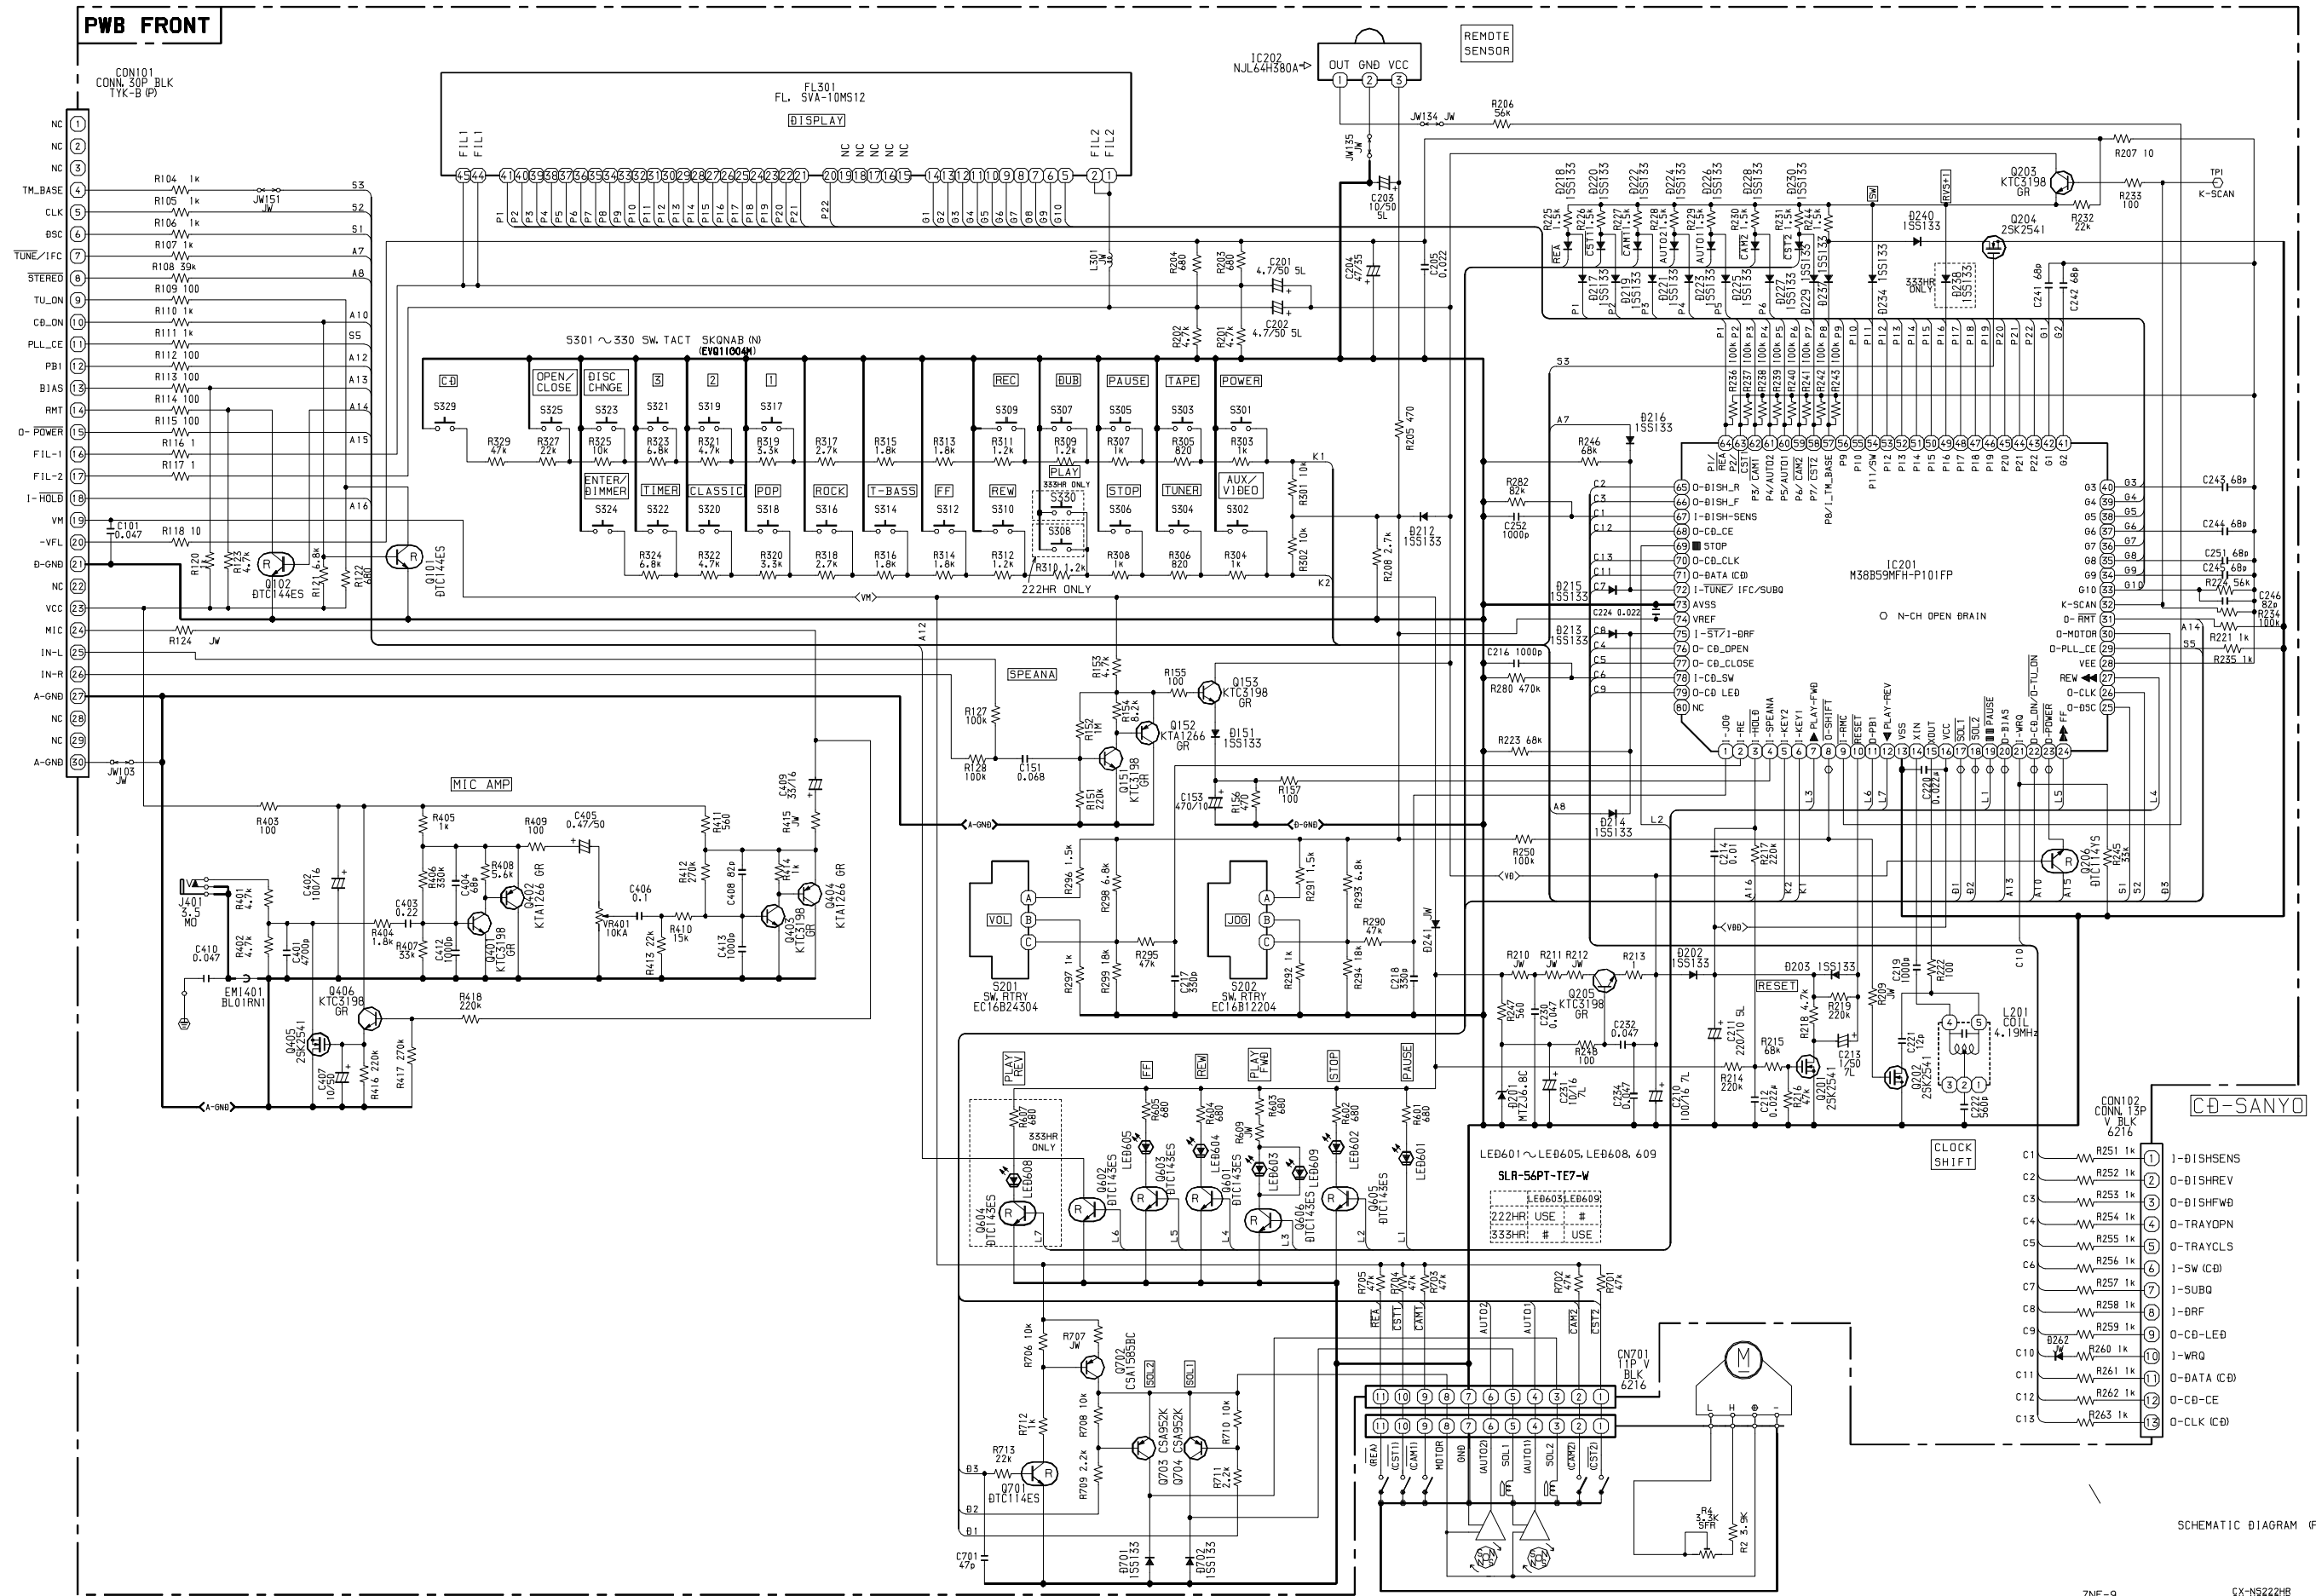

SCHEMATIC DIAGRAM (FR)

サービス技術ニュース	
番号	連絡内容
G- -	
G- -	
G- -	

アイワ株式会社
AIWA CO.,LTD.

9820543

Tokyo Japan

〒110-8710 東京都台東区池之端1-2-11 ☎03(3827)3111 (代表)

Printed in Singapore