
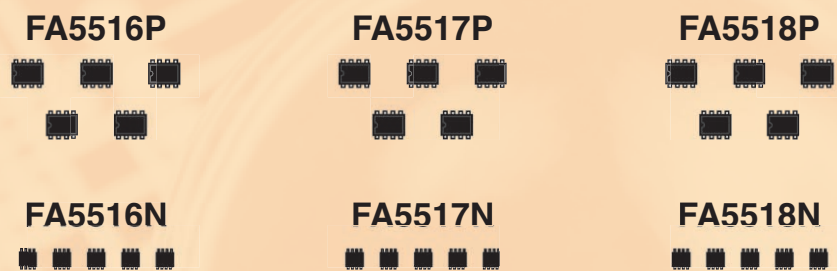


低待机功率 IC “FA5516/17/18”

Low Standby Power IC “FA5516/17/18”

●特性 Features

- 500V 耐压启动电路
 - 重负载时的3种频率
FA5516/17/18 : 130k/100k/60kHz
 - 低待机功率
无负载时输入可以是90mW
 - 软启动
 - OVP, OLP : 定时锁定保护
 - DIP-8/SOP-8
 - 应用 : 笔记本电脑用适配器
LCD 显示器用适配器
- 500V Breakdown Voltage Start-up Circuit
 - 3 types frequency
FA5516/17/18 : 130k/100K/65KHz
 - Low Standby Power
0.1W input available at No Load
 - Soft Start
 - OVP, OLP : Timer Latch
 - DIP-8/SOP-8
 - Application : Notebook PC Adaptor
LCD Monitor Adaptor

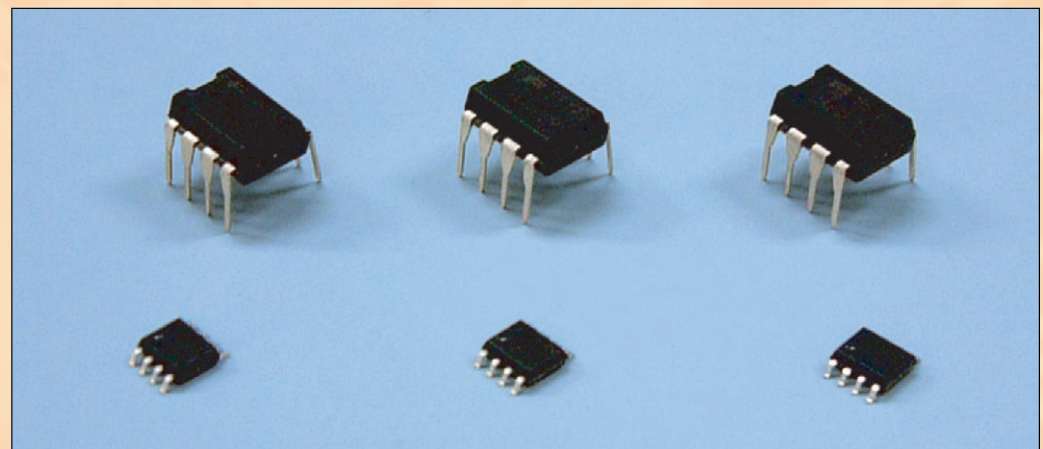

●应用电路 Application circuit

