

BIPOLAR ANALOG INTEGRATED CIRCUIT

μ PC1316

DUAL AUDIO POWER AMPLIFIER


DESCRIPTION

The μ PC1316 is a dual audio power amplifier designed for portable audio sets.

FEATURES

- Wide operating voltage range. $V_{CC} = 3$ to 16 V
- High output power. $P_O = 2$ W TYP. @ 12 V / 8Ω / 10 %
 $P_O = 1.6$ W TYP. @ 9 V / 4Ω / 10 %
 $P_O = 1.2$ W TYP. @ 9 V / 8Ω / 10 %
 $P_O = 0.7$ W TYP. @ 6 V / 4Ω / 10 %
 $P_O = 0.5$ W TYP. @ 6 V / 8Ω / 10 %
 $P_O = 80$ mW @ 4.5 V / 32Ω / 10 %
 (V_{CC} / R_L / THD)
- High supply voltage rejection. SVR = 45 dB
- Low quiescent current. $I_{CC} = 12$ mA
- Low pop noise at power switch on and off.

BLOCK DIAGRAM

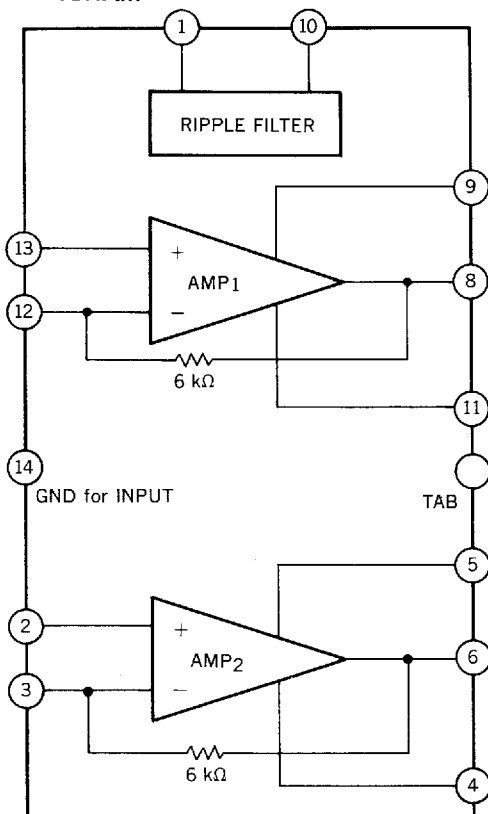

CONNECTION DIAGRAM

PIN NO	CONNECTION
1	Filter
2	Input 2
3	NFB 2
4	Compensation 2
5	Bootstrap 2
6	Output 2
7	NC
TAB	GND
8	Output 1
9	Bootstrap 1
10	V_{CC}
11	Compensation 1
12	NFB 1
13	Input 1
14	GND

ORDERING INFORMATION

PART NUMBER	PACKAGE	QUALITY GRADE
μ PC1316C	14 PIN PLASTIC DIP WITH TAB (300 mil)	Standard

Please refer to "Quality grade on NEC Semiconductor Devices" (Document number IEI-1209) published by NEC Corporation to know the specification of quality grade on the devices and its recommended applications.

ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

Supply Voltage (No Signal)	V_{CC1}	18	V
Supply Voltage (Operating)	V_{CC2}	16	V
Power Dissipation	P_D	2.4 *	W
Operating Temperature	T_{opt}	-20 to +70	$^\circ\text{C}$
Storage Temperature	T_{stg}	-40 to +150	$^\circ\text{C}$

* 50 x 50 x 0.035 mm Copper heat sink on PCB

RECOMMENDED OPERATING CONDITIONS ($T_a = 25^\circ\text{C}$)


CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT
Supply Voltage ($R_L=16\ \Omega$)	V_{CC} (16)	3		16	V
Supply Voltage ($R_L=8\ \Omega$)	V_{CC} (8)	3		13	V
Supply Voltage ($R_L=4\ \Omega$)	V_{CC} (4)	3		9	V
Load Impedance	R_L	4	8		Ω
Voltage Gain	A_v	34	44		dB

ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)


($V_{CC}=9\ \text{V}$, $R_f=33\ \Omega$, $f=1\ \text{kHz}$, $R_L=8\ \Omega$)

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITION
Circuit Current	I_{CC}		12	25	mA	No Signal
Voltage Gain	A_{v1}	41	44	47	dB	$P_O=0.25\ \text{W}$, $R_f=33\ \Omega$
	A_{v2}		34		dB	$P_O=0.25\ \text{W}$, $R_f=120\ \Omega$
Output Power	P_{O1}		2		W	$V_{CC}=12\ \text{V}$, $R_L=8\ \Omega$, THD = 10 %
	P_{O2}		1.6		W	$V_{CC}=9\ \text{V}$, $R_L=4\ \Omega$, THD = 10 %
	P_{O3}	0.9	1.2		W	$V_{CC}=9\ \text{V}$, $R_L=8\ \Omega$, THD = 10 %
	P_{O4}		0.7		W	$V_{CC}=6\ \text{V}$, $R_L=4\ \Omega$, THD = 10 %
	P_{O5}		0.5		W	$V_{CC}=6\ \text{V}$, $R_L=8\ \Omega$, THD = 10 %
	P_{O6}		80		mW	$V_{CC}=4.5\ \text{V}$, $R_L=32\ \Omega$, THD = 10 %
Total Harmonic Distortion	THD1		0.4	1.6	%	$P_O=0.5\ \text{W}$, $R_f=33\ \Omega$
	THD2		0.3		%	$P_O=0.5\ \text{W}$, $R_f=120\ \Omega$
Output Noise Voltage	NL		0.9	1.5	mV _{r.m.s.}	$R_G=10\ \text{k}\Omega$
Supply Voltage Rejection	SVR	36	45		dB	$R_G=0$, $f(\text{ripple})=100\ \text{Hz}$, $V(\text{ripple})=0.3\ V_{r.m.s.}$
Cross Talk	CT	40	55		dB	$R_G=0$, $P_O=0.25\ \text{W}$
Channel Balance	ChB	-2	0	2	dB	$P_O=0.25\ \text{W}$
Input Impedance	Z_{in}		5		M Ω	

TEST CIRCUIT

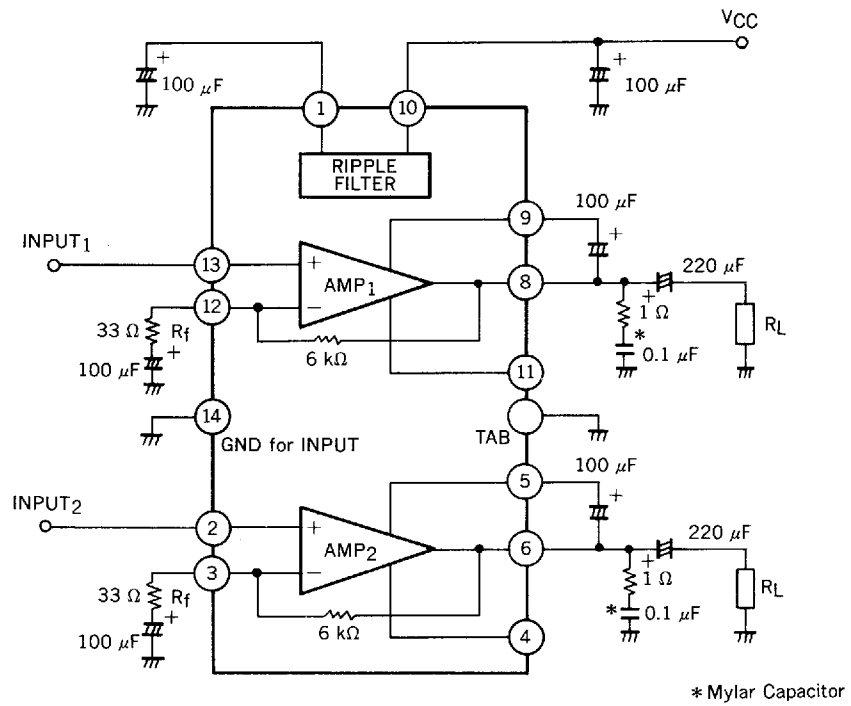


TYPICAL APPLICATION

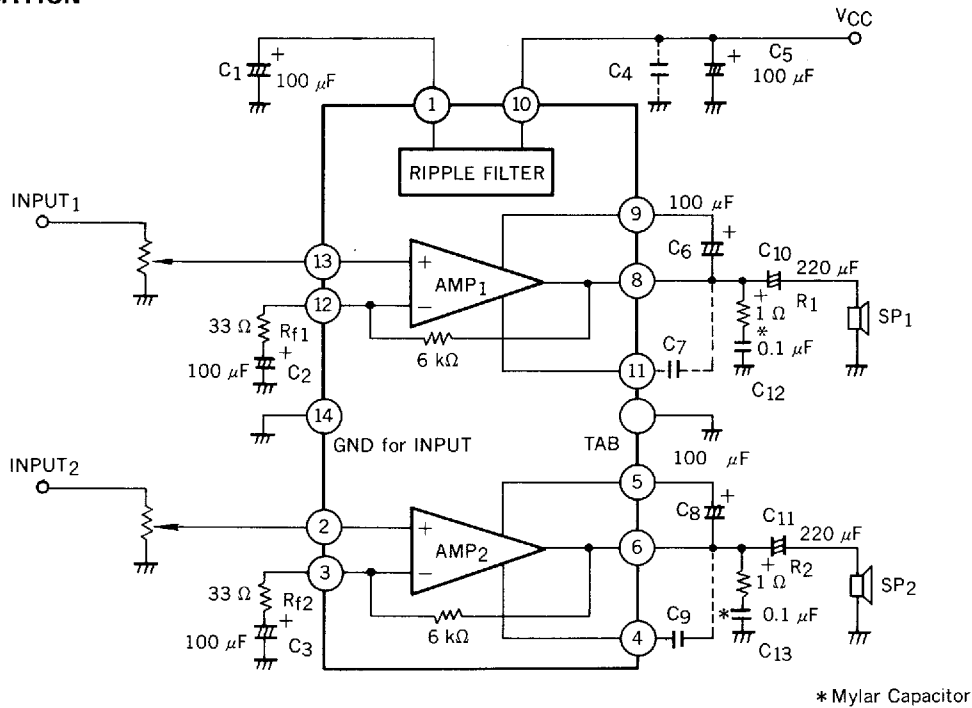







NOTE FOR USE

- (1) Mylar capacitor is recommended as C₁₂, C₁₃.
- (2) Add C₇, C₉, in the case of reducing voltage gain at high frequency.
- (3) Add C₄ or increase capacitance of C₁₂, C₁₃ when a oscillation may occur due to the pattern layout on PCB.
- (4) Voltage gain can be changed by value of R_{f1}, R_{f2}. The voltage gain should be set more than 34 dB.
- (5) When a input capacitor is connected the input terminal, a bias resistor should be connected between its terminal and GND.


EXAMPLE FOR PRINTED CIRCUIT BOARD (Copper foil side)

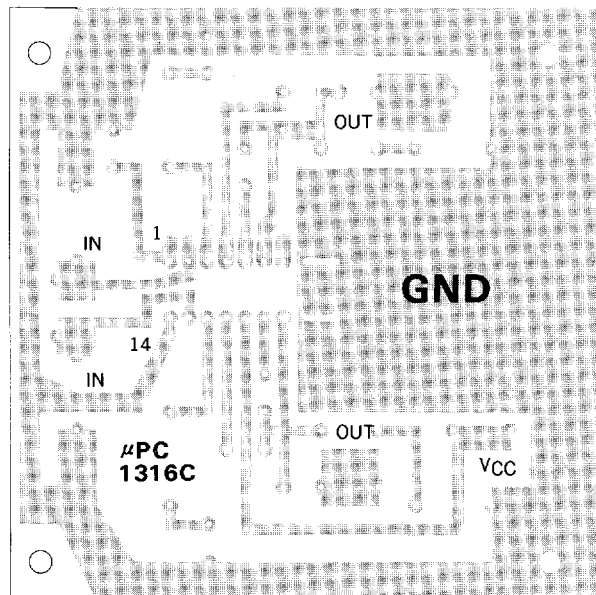


TYPICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)

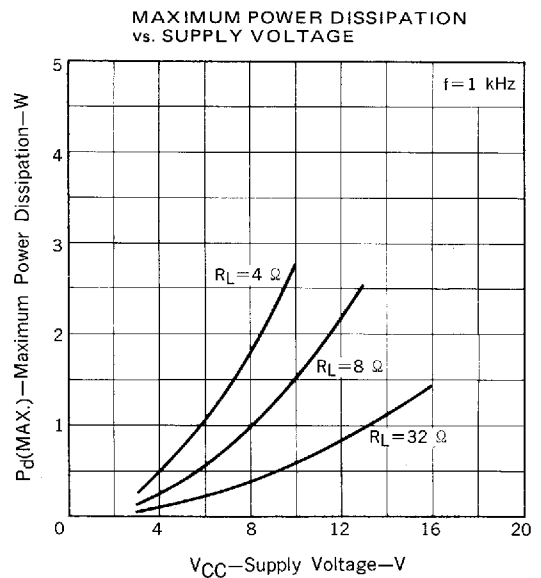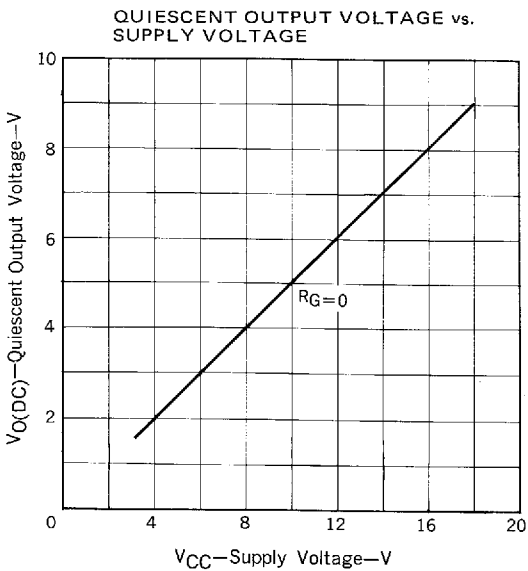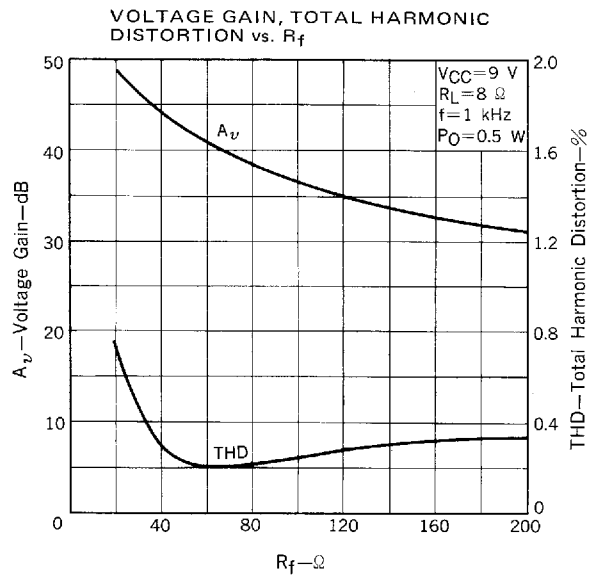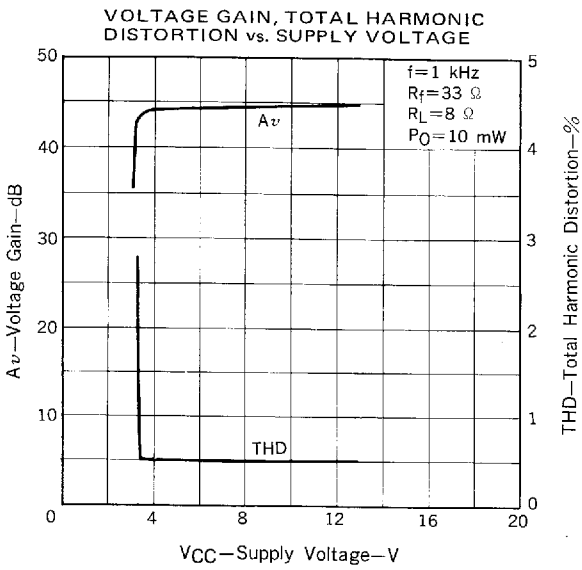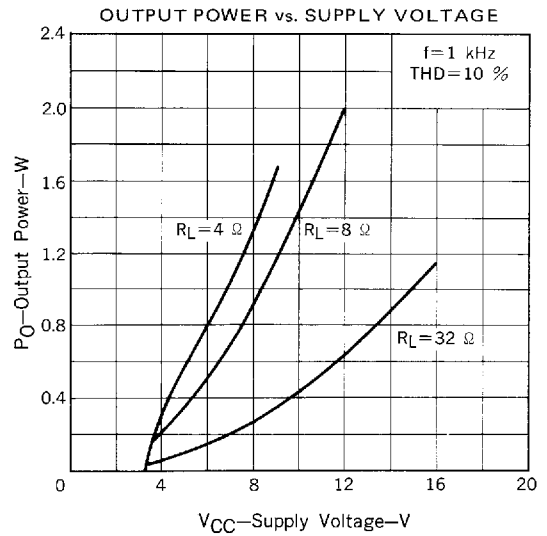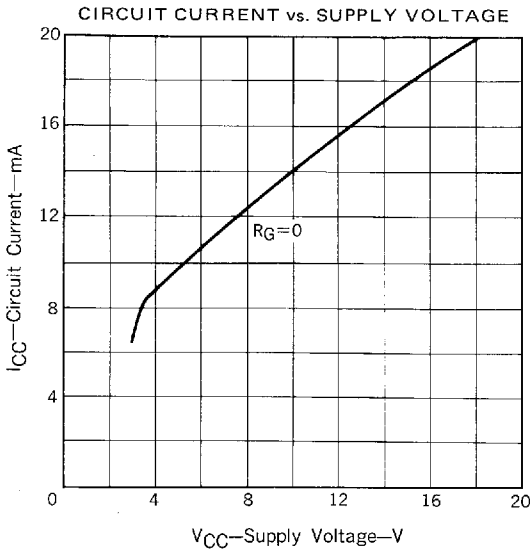

VOLTAGE GAIN, TOTAL HARMONIC DISTORTION vs. FREQUENCY

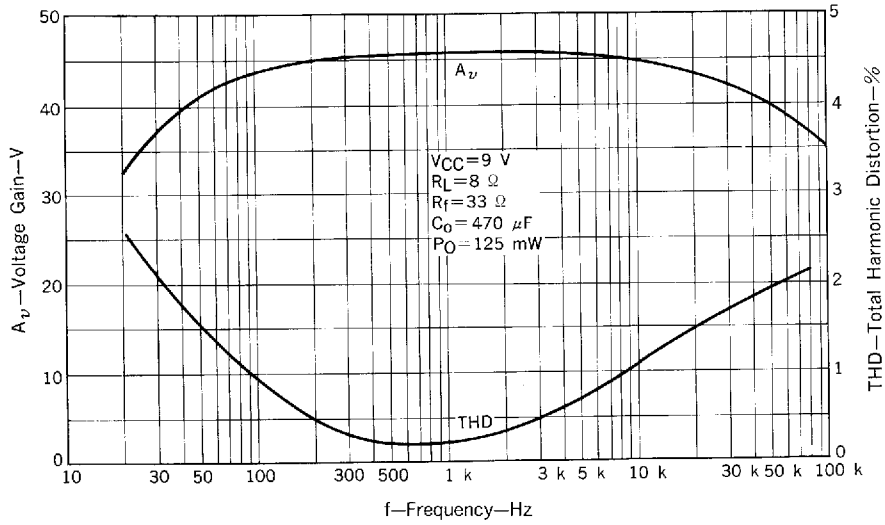

TOTAL HARMONIC DISTORTION vs. OUTPUT POWER

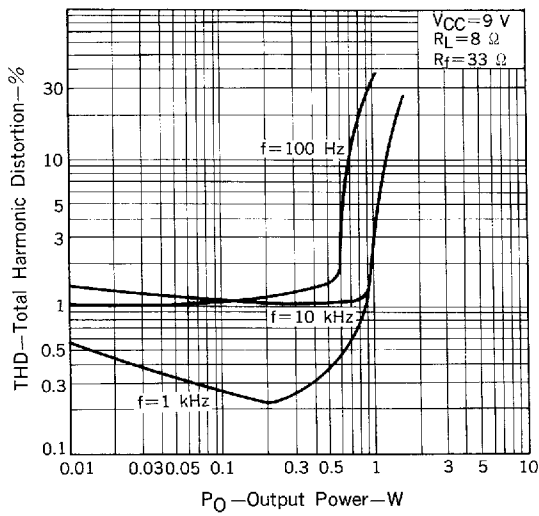

PACKAGE DISSIPATION vs. AMBIENT TEMPERATURE



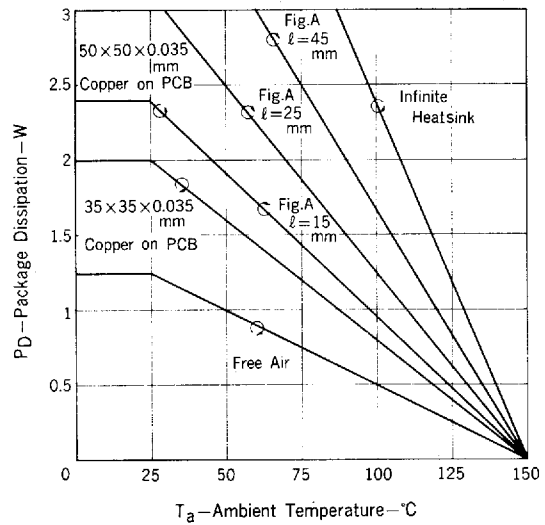


Fig. A



UNIT: mm

14PIN PLASTIC DIP WITH TAB (300 mil)

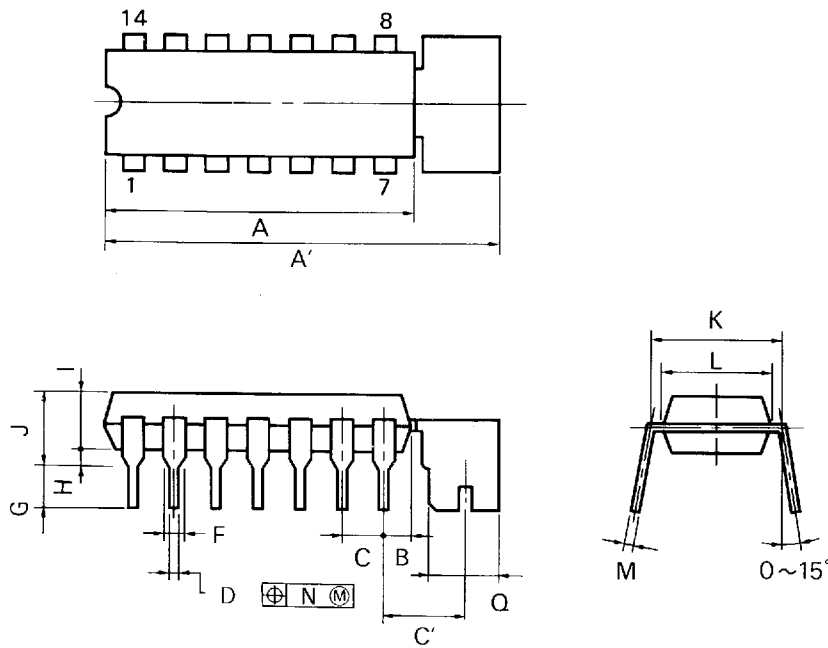

P14CT-100-300B

NOTES

- 1) Each lead centerline is located within 0.25 mm (0.01 inch) of its true position (T.P.) at maximum material condition.
- 2) Item "K" to center of leads when formed parallel.

ITEM	MILLIMETERS	INCHES
A	20.32 MAX.	0.800 MAX.
A'	24.60 MAX.	0.969 MAX.
B	2.54 MAX.	0.100 MAX.
C	2.54 (T.P.)	0.100 (T.P.)
C'	4.74	0.187
D	0.50 ^{+0.10}	0.020 ^{-0.004}
F	1.1 MIN.	0.043 MIN.
G	3.4 ^{+0.3}	0.134 ^{+0.012}
H	0.51 MIN.	0.020 MIN.
I	4.31 MAX.	0.170 MAX.
J	5.08 MAX.	0.200 MAX.
K	7.62 (T.P.)	0.300 (T.P.)
L	6.4	0.252
M	0.30 ^{+0.10} _{-0.05}	0.012 ^{-0.004}
N	0.25	0.01
Q	4.40 ^{+0.50}	0.173 ^{+0.020}