



SAMSUNG

COLOR TELEVISION RECEIVER

Chassis : S15A
Model: CK3373T5X CK3373Z5X
CK5073T5X CK5073Z5X
CK5373T5X CK5373Z5X

SERVICE *Manual*

COLOR TELEVISION RECEIVER



CONTENTS

1. Precautions
2. Specifications and IC Data
3. Disassembly and Reassembly
4. Alignment and Adjustment
5. Troubleshooting
6. Exploded View and Parts List
7. Electric Parts List
8. Block Diagram
9. PCB Layout Diagram
10. Wiring Diagram
11. Schematic Diagrams



ELECTRONICS

1. Precautions

Follow these safety, servicing and ESD precautions to prevent damage and protect against potential hazards such as electrical shock and X-rays.

1-1 Safety Precautions

1. Be sure that all of the built-in protective devices are replaced. Restore any missing protective shields.
2. When reinstalling the chassis and its assemblies, be sure to restore all protective devices, including: nonmetallic control knobs and compartment covers.
3. Make sure that there are no cabinet openings through which people—particularly children—might insert fingers and contact dangerous voltages. Such openings include the spacing between the picture tube and the cabinet mask, excessively wide cabinet ventilation slots, and improperly fitted back covers.

If the measured resistance is less than 1.0 megohm or greater than 5.2 megohms, an abnormality exists that must be corrected before the unit is returned to the customer.

4. Leakage Current Hot Check (Figure 1-1):
Warning: Do not use an isolation transformer during this test. Use a leakage-current tester or a metering system that complies with American National Standards Institute (ANIS C101.1, Leakage Current for Appliances), and Underwriters Laboratories (UL Publication UL1410, 59.7).
5. With the unit completely reassembled, plug the AC line cord directly into the power outlet. With the unit's AC switch first in the ON position and then OFF, measure the current between a known earth ground (metal water pipe, conduit, etc.) and all exposed metal parts, including: antennas, handle brackets, metal cabinets, screwheads and control shafts. The current measured should not exceed 0.5 milliamp. Reverse the power-plug prongs in the AC outlet and repeat the test.

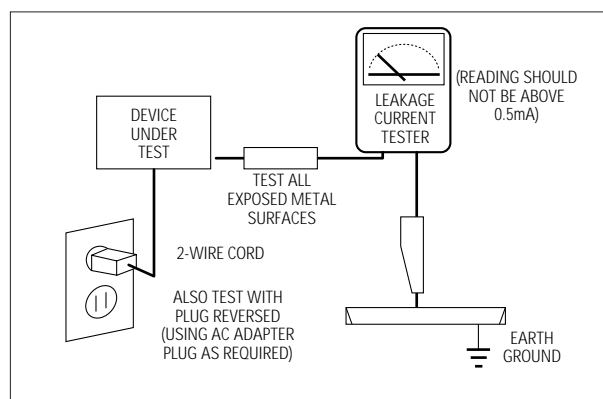


Fig. 1-1 AC Leakage Test



6. Antenna Cold Check:
With the unit's AC plug disconnected from the AC source, connect an electrical jumper across the two AC prongs. Connect one lead of the ohmmeter to an AC prong. Connect the other lead to the coaxial connector.
7. X-ray Limits:
The picture tube is especially designed to prohibit X-ray emissions. To ensure continued X-ray protection, replace the picture tube only with one that is the same type as the original. Carefully reinstall the picture tube shields and mounting hardware; these also provide X-ray protection.
8. High Voltage Limits:
High voltage must be measured each time servicing is done on the B+, horizontal deflection or high voltage circuits. Correct operation of the X-ray protection circuits must be reconfirmed whenever they are serviced.
(X-ray protection circuits also may be called "horizontal disable" or "hold-down".)

Heed the high voltage limits. These include the X-ray Protection Specifications Label, and the Product Safety and X-ray Warning Note on the service data schematic.

1-1 Safety Precautions (Continued)

9. High voltage is maintained within specified limits by close-tolerance, safety-related components and adjustments. If the high voltage exceeds the specified limits, check each of the special components.
10. Design Alteration Warning:
Never alter or add to the mechanical or electrical design of this unit. Example: Do not add auxiliary audio or video connectors. Such alterations might create a safety hazard. Also, any design changes or additions will void the manufacturer's warranty.
11. Hot Chassis Warning:
Some TV receiver chassis are electrically connected directly to one conductor of the AC power cord. If an isolation transformer is not used, these units may be safely serviced only if the AC power plug is inserted so that the chassis is connected to the ground side of the AC source.

To confirm that the AC power plug is inserted correctly, do the following: Using an AC voltmeter, measure the voltage between the chassis and a known earth ground. If the reading is greater than 1.0V, remove the AC power plug, reverse its polarity and reinsert. Re-measure the voltage between the chassis and ground.
12. Some TV chassis are designed to operate with 85 volts AC between chassis and ground, regardless of the AC plug polarity. These units can be safely serviced only if an isolation transformer inserted between the receiver and the power source.
13. Some TV chassis have a secondary ground system in addition to the main chassis ground. This secondary ground system is not isolated from the AC power line. The two ground systems are electrically separated by insulating material that must not be defeated or altered.
14. Components, parts and wiring that appear to have overheated or that are otherwise damaged should be replaced with parts that meet the original specifications. Always determine the cause of damage or overheating, and correct any potential hazards.
15. Observe the original lead dress, especially near the following areas: Antenna wiring, sharp edges, and especially the AC and high voltage power supplies. Always inspect for pinched, out-of-place, or frayed wiring. Do not change the spacing between components and the printed circuit board. Check the AC power cord for damage. Make sure that leads and components do not touch thermally hot parts.
16. Picture Tube Implosion Warning:
The picture tube in this receiver employs "integral implosion" protection. To ensure continued implosion protection, make sure that the replacement picture tube is the same as the original.
17. Do not remove, install or handle the picture tube without first putting on shatterproof goggles equipped with side shields. Never handle the picture tube by its neck. Some "in-line" picture tubes are equipped with a permanently attached deflection yoke; do not try to remove such "permanently attached" yokes from the picture tube.
18. Product Safety Notice:
Some electrical and mechanical parts have special safety-related characteristics which might not be obvious from visual inspection. These safety features and the protection they give might be lost if the replacement component differs from the original—even if the replacement is rated for higher voltage, wattage, etc.

Components that are critical for safety are indicated in the circuit diagram by shading, () or ().
Use replacement components that have the same ratings, especially for flame resistance and dielectric strength specifications. A replacement part that does not have the same safety characteristics as the original might create shock, fire or other hazards.

1-2 Servicing Precautions

Warning1: First read the "Safety Precautions" section of this manual. If some unforeseen circumstance creates a conflict between the servicing and safety precautions, always follow the safety precautions.

Warning2: An electrolytic capacitor installed with the wrong polarity might explode.

1. Servicing precautions are printed on the cabinet. Follow them.
2. Always unplug the unit's AC power cord from the AC power source before attempting to: (a) Remove or reinstall any component or assembly, (b) Disconnect an electrical plug or connector, (c) Connect a test component in parallel with an electrolytic capacitor.
3. Some components are raised above the printed circuit board for safety. An insulation tube or tape is sometimes used. The internal wiring is sometimes clamped to prevent contact with thermally hot components. Reinstall all such elements to their original position.
4. After servicing, always check that the screws, components and wiring have been correctly reinstalled. Make sure that the portion around the serviced part has not been damaged.
5. Check the insulation between the blades of the AC plug and accessible conductive parts (examples: metal panels, input terminals and earphone jacks).
6. Insulation Checking Procedure: Disconnect the power cord from the AC source and turn the power switch ON. Connect an insulation resistance meter (500V) to the blades of the AC plug.

The insulation resistance between each blade of the AC plug and accessible conductive parts (see above) should be greater than 1 megohm.
7. Never defeat any of the B+ voltage interlocks. Do not apply AC power to the unit (or any of its assemblies) unless all solid-state heat sinks are correctly installed.
8. Always connect a test instrument's ground lead to the instrument chassis ground before connecting the positive lead; always remove the instrument's ground lead last.

1-3 Precautions for Electrostatically Sensitive Devices (ESDs)

1. Some semiconductor (“solid state”) devices are easily damaged by static electricity. Such components are called Electrostatically Sensitive Devices (ESDs); examples include integrated circuits and some field-effect transistors. The following techniques will reduce the occurrence of component damage caused by static electricity.
2. Immediately before handling any semiconductor components or assemblies, drain the electrostatic charge from your body by touching a known earth ground. Alternatively, wear a discharging wrist-strap device. (Be sure to remove it prior to applying power—this is an electric shock precaution.)
3. After removing an ESD-equipped assembly, place it on a conductive surface such as aluminum foil to prevent accumulation of electrostatic charge.
4. Do not use freon-propelled chemicals. These can generate electrical charges that damage ESDs.
5. Use only a grounded-tip soldering iron when soldering or unsoldering ESDs.
6. Use only an anti-static solder removal device. Many solder removal devices are not rated as “anti-static”; these can accumulate sufficient electrical charge to damage ESDs.
7. Do not remove a replacement ESD from its protective package until you are ready to install it. Most replacement ESDs are packaged with leads that are electrically shorted together by conductive foam, aluminum foil or other conductive materials.
8. Immediately before removing the protective material from the leads of a replacement ESD, touch the protective material to the chassis or circuit assembly into which the device will be installed.
9. Minimize body motions when handling unpackaged replacement ESDs. Motions such as brushing clothes together, or lifting a foot from a carpeted floor can generate enough static electricity to damage an ESD.

2. Specifications and IC Data

2-1 Specifications

Television System:

MODEL	SYSTEM
CI	PAL-I (UHF)
CII	PAL-I (VHF/UHF)
CX	PAL-B/G, SECAM-B/G
CK	PAL-B/G, D/K, SECAM-B/G, D/K
CW	PAL-B/G, D/K, SECAM-B/G, D/K, NT 4.43
CS	PAL-B/G, D/K, SECAM-B/G, D/K, NT4.43, NT3.58

Channels:

System Band	PAL/SECAM-B/G,I	PAL, SECAM- D/K	SECAM-K1, PAL-D	NTSC - M
VHF	2 - 12	1 - 13	2 - 9	2 - 13
UHF	21 - 69	21 - 69	13 - 57	14-69

Intermediate Frequencies (MHz) :

SYSTEM IF Carrier Frequency	PAL/ SECAM- B/G	PAL/SECAM-D/K, SECAM-K1	PAL - I	NTSC - M
Picture IF Carrier	38.90	38.90	38.90	38.90
Sound IF Carrier	33.40	32.40	32.90	34.40
Color Sub Carrier	34.47	34.47	34.47	35.32

Picture Tube:

14 Inch	A34KQV42X	Quick start, in-line-gun, Black stripe, 90°degree deflection
20 Inch	A48KRD82X(H)	
21 Inch	A51KQJ63X	

Power Requirements:

AC 100~260V, 50/60Hz

Antenna Input Impedance:

VHF, UHF : Telescopic dipole antenna (75 ohm unbalanced type)

Speaker Impedance

8 ohm, 5W+5W (Dual Type)
16 ohm, 3W (Monitor Type & Dual Type)

2-2 IC Line Up

Table 2-1 IC Line-Up			
Loc. No	Specification	Description	Remark
HC101	PAP103	IF PRE-AMP	
IC201	TDA8842 TDA8841	PAL/SECAM-B/G, D/K, NTSC PAL-B/G, D/K, NTSC	Philips
IC301	TDA8356	VERTICAL OUTPUT	
IC501	TDA6107Q	RGB DRIVE AMP	
IC601	TDA7056B	SOUND-AMP (3W x 1CH or 3W x 2CH)	
IC602	TDA7057AQ	SOUND-AMP (5W x 2CH)	Dual Type
IC801	KA3S0680RF	POWER IC (STR)	
IC802	KA7630	CUSTOM REGULATOR (5V, 8V)	
IC901	SZM173EA	W/O TTX, English/French/Arabian	Zilog (Non TTX)
	SZM173AR	W/O TTX, English/Arabian	
	SZM173EV	W/O TTX, English/Vietnamese/Indonesian/Malay	
	SZM173EC	W/O TTX, English/Chinese	
	SZM173ET	W/O TTX, English/Thai	
	SZM173EW	W/O TTX, English/German/French/Dutch/Italian/Spanish, Swedish/Yugo/Greek/Croatian	
	SZM173EE	W/O TTX, English/Romanian/Hungarian/Polish/Czech/Bulgarian	Philips (TTX)
	SZM173ER	W/O TTX, English/Russian	
	SPM175EE	TTX, West : English/German/French/Dutch/Italian/Spanish/Swedish East : English/Czech/Croatian/Romanian/Hungarian/Polish	
	SPM175E	TTX, English/French/Swiss	
	SPM175ER	TTX, English/Russian/Bulgarian	
	SPM175EP	TTX, English/Iranian	
	SPM175EA	TTX, English/French/Arabian	
SPM175EG	TTX, English/Greek/Yugo		
IC902	24C04/KS24C040	EEPROM	
PC801	TCET1108 / LTV817B	PHOTO COUPLER	

2-3 Semiconductor Base Diagrams


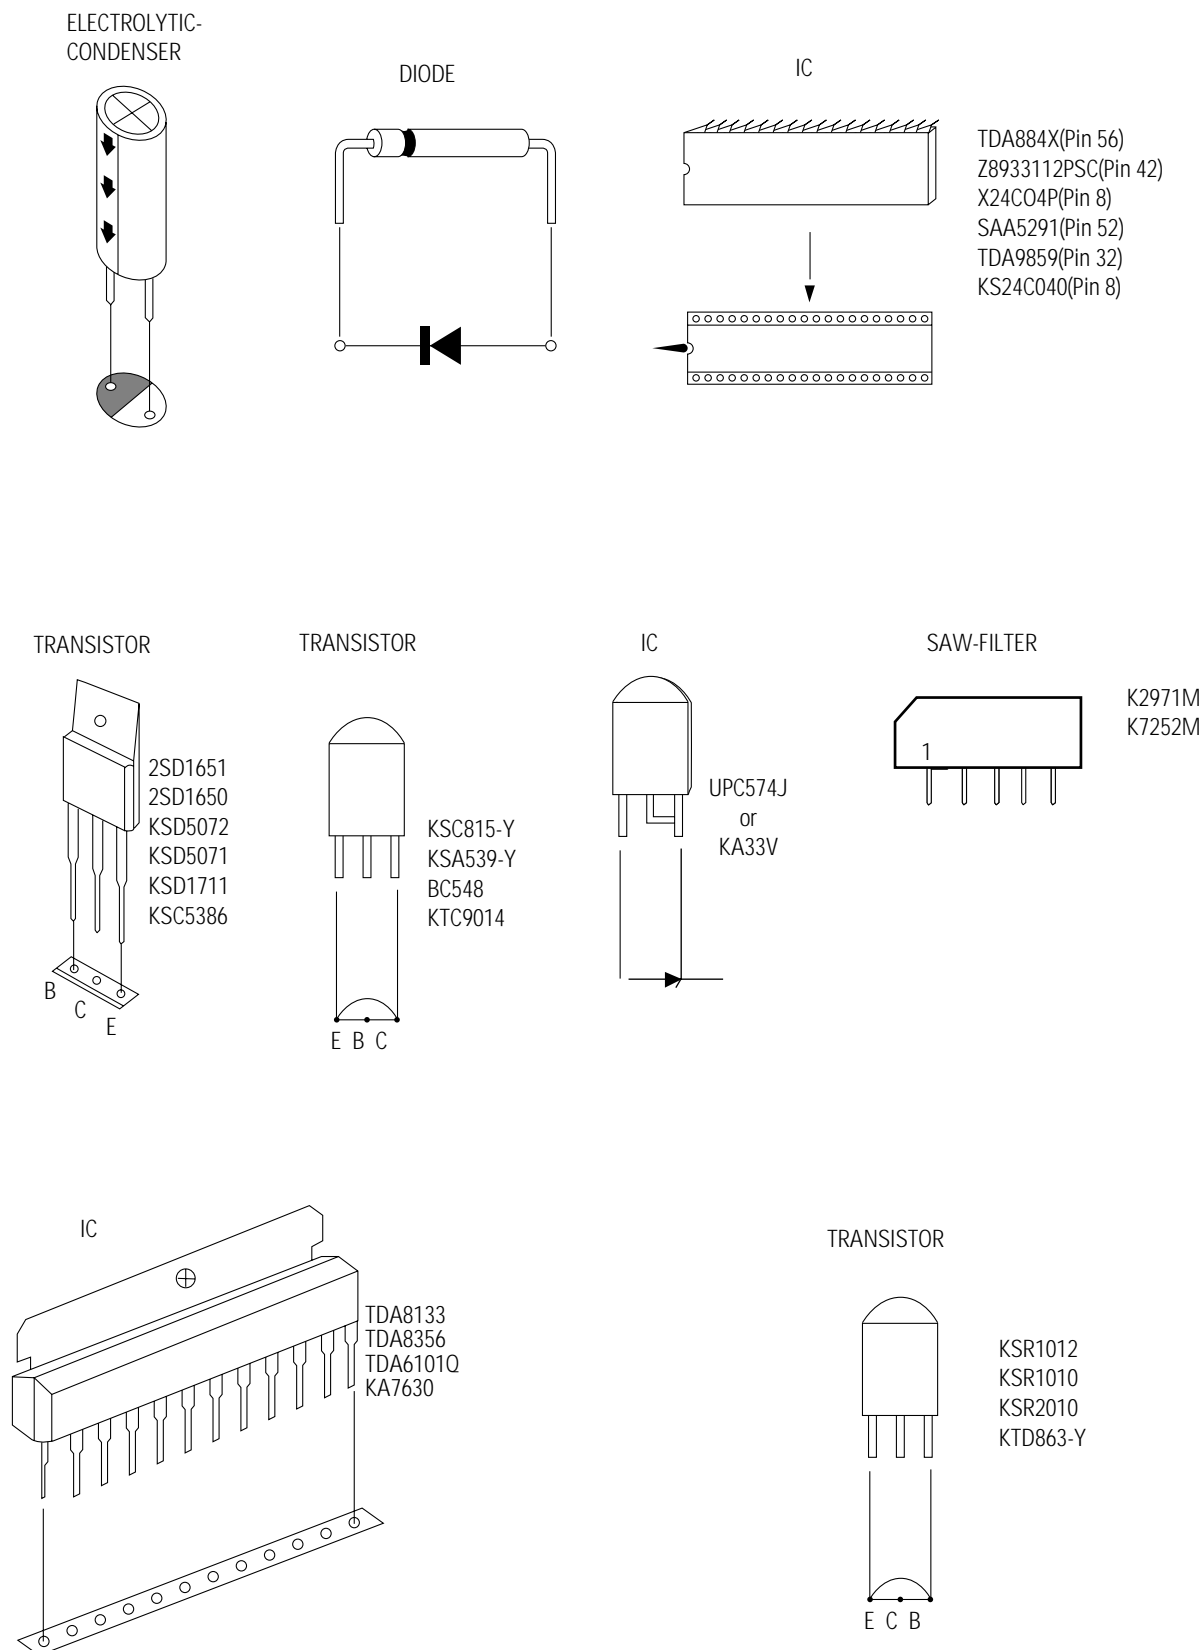


Fig. 2-1 Semiconductor Base Diagrams


MEMO

3. Disassembly and Reassembly



3-1 Back Cover Removal

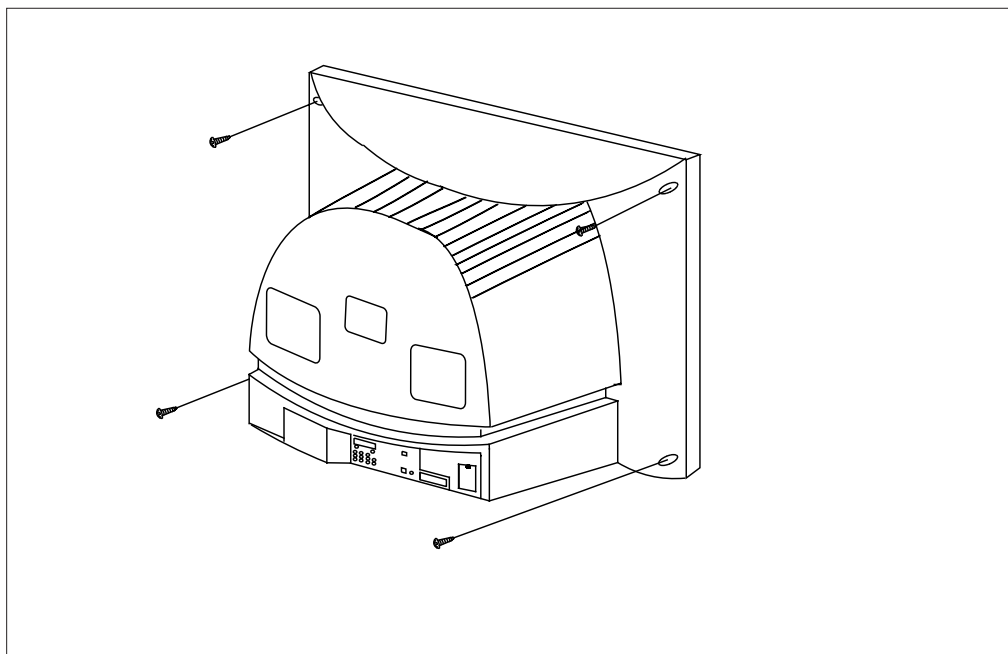

1. After removing the screws, press the tension rib and pull the cabinet backwards.
2. To reassemble, press the tension rib (see diagram).

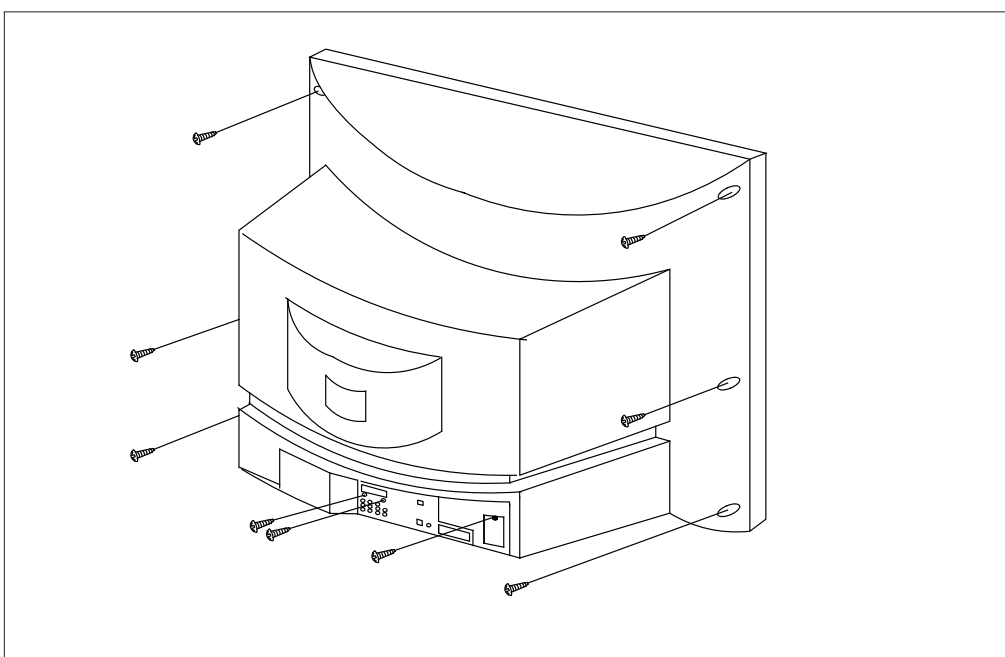


3-2 Main Board Removal

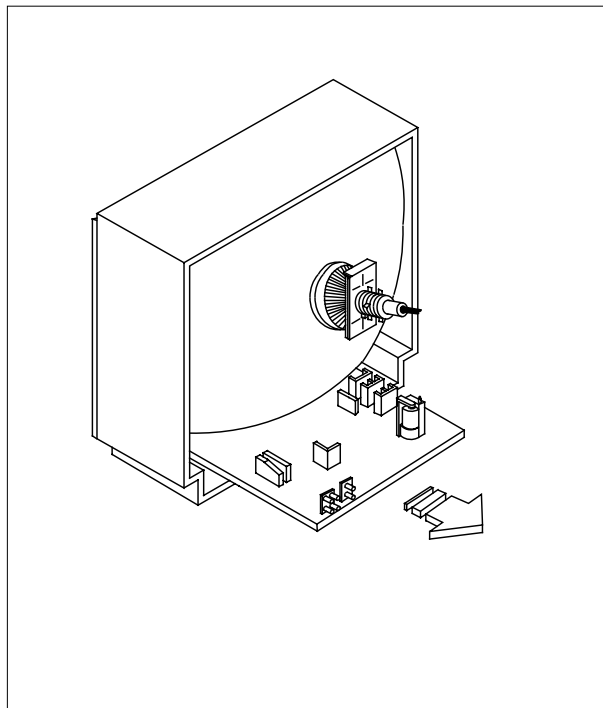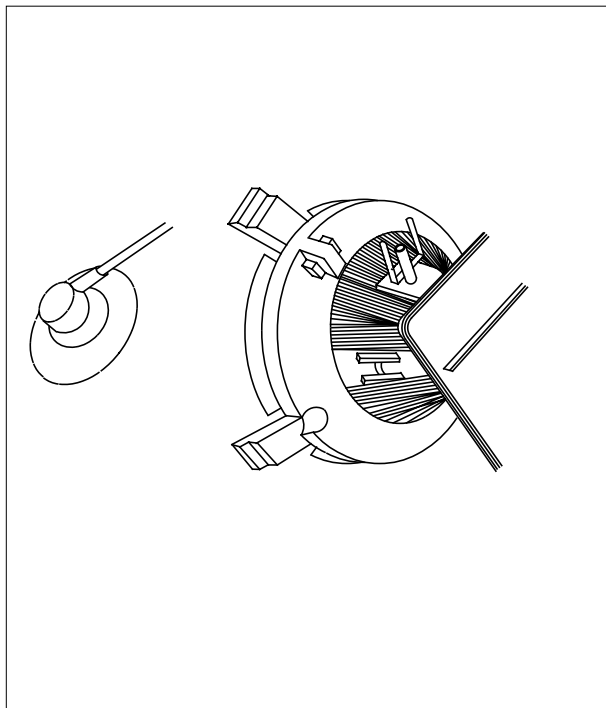


1. Separate the socket board from the CRT neck.
2. Remove the Anode Cap from the CRT.
3. Remove the main board by pulling it with both hands.

Warning: The FBT is charged with high voltage. Before removing the Anode Cap, discharge the voltage through one of the heat sinks on the main board.

3-3 Speaker Removal

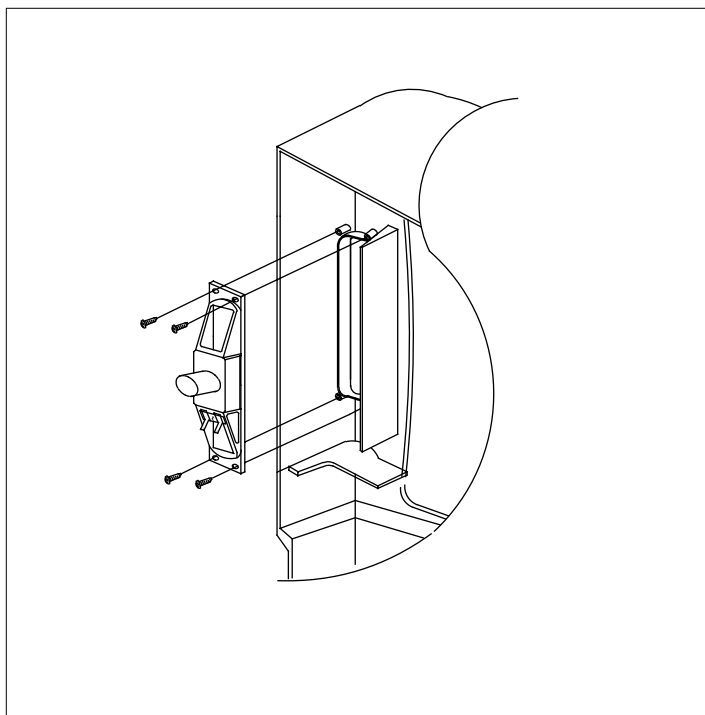


1. Remove the speaker by pressing the tension rib.

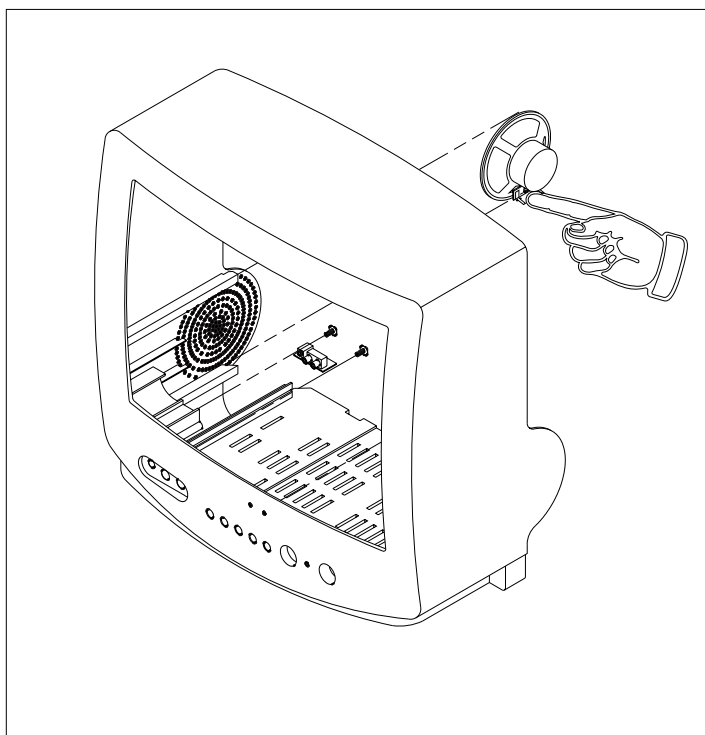

1. Remove the screws.
2. Remove the speaker by pressing the tension rib.

3-4 CRT Removal

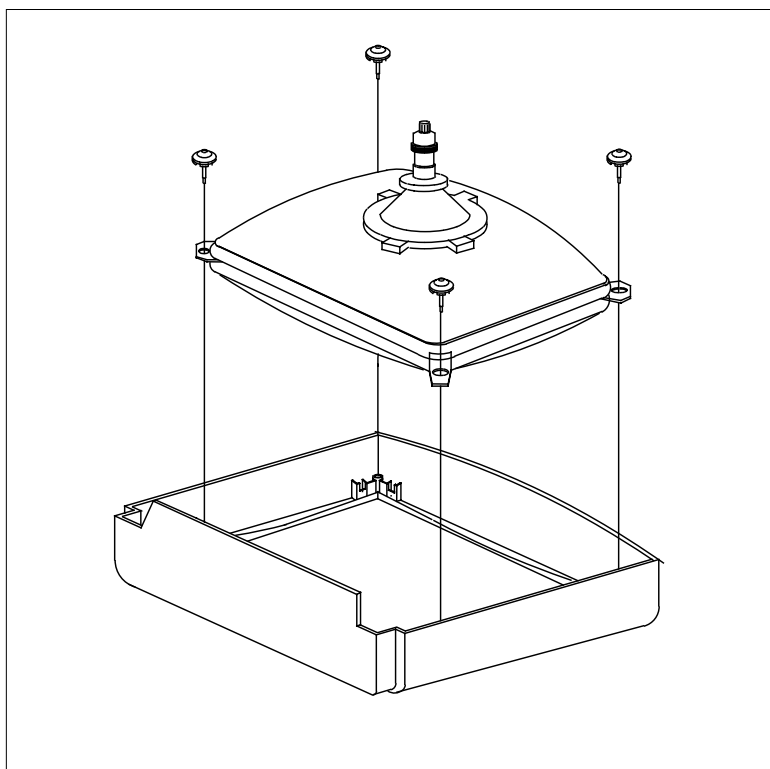

1. Spread a soft mat on the floor. Place the TV set face down.
2. Remove the 4 nuts mounting the CRT to the front cabinet. Lift the CRT.
3. Caution: Because of the high vacuum and large surface area of the picture tube, be careful while handling it: (1) Always lift the picture tube by grasping it firmly around the faceplate, (2) Never lift the tube by its neck. (3) Do not scratch the picture tube or apply excessive pressure. Fractures of the glass may cause an implosion.

4. Alignment and Adjustments

4-1 Preadjustment

4-1-1 Factory Mode

1. Do not attempt these adjustments in the Video Mode.
2. The Factory Mode adjustments are necessary when either the EEPROM (IC902) or the CRT is replaced.
3. Do not tamper with the "Adjustment" screen of the Factory Mode menu. This screen is intended only for factory use.

4-1-2 When EEPROM (IC902) Is Replaced

1. When IC902 is replaced all adjustment data revert to initial values. It is necessary to re-program this data.
2. After IC902 is replaced, warm up the TV for 10 seconds.

4-1-3 When CRT Is Replaced

1. Make the following adjustments AFTER setting up after setting up purity and convergence :

White Balance
Sub-Brightness
Vertical Center
Vertical Size
Horizontal Size
Fail Safe (This adjustment must be the last step).

2. If the EEPROM or CRT is replaced, set PVA to 45 (factory mode) and set SC as follows.

14, 16 inch : 0
20 inch : 10
21 inch : 12

4-2 Factory/Service Mode

4-2-1 Procedure for the "Adjustment" Mode

1. This mode uses the standard remote control. The Service Mode is activated by entering the following remote-control sequence :
 - (1) SLEEP→FACTORY.
 - (2) STAND-BY→DISPLAY→P.STD→MUTE→POWER ON.
2. The "SERVICE (FACTORY)" message will be displayed. The Service Mode has four components: Adjustment, Test Pattern, Option Bytes and Reset.
3. Access the Adjustment Mode by pressing the "VOLUME" keys (Up or Down). The adjustment parameters are listed in the accompanying table, and selected by pressing the CHANNEL keys (▲, ▼).
4. Selection sequences for the all system:

DOWN or UP key:
AGC>VCO>SBT>SCT>SCR>SC>RG>GG>
BG>CDL>BLU>PSL>PVS>PVA>PHS>NSR>
STT
5. The VOLUME keys increase or decrease the adjustment values (stored in the non-volatile memory) when Adjustment Mode is cancelled.
6. Cancel the Adjustment Mode by re-pressing the "FACTORY" or "Power OFF" keys.

4-2-2 Main Adjustment Parameter

Table 4-1 Main Adjustment Parameter (Zilog, Philips μ -com)				
FUNCTION	OSD ABBREVIATION	RANGE	INITIAL DATA	REMARK
AUTO GAIN CONTROL	AGC	0 ~ 63 STEP	10	TDA8842 TDA8841
VOLTAGE CONTROL OSCILLATOR	VCO	0 ~ 128 STEP	80	
		0 ~ 1 STEP	1 (For East Europe)	
SUB BRIGHT	SBT	0 ~ 23 STEP	8	
SUB CONTRAST	SCT	0 ~ 23 STEP	10	
SUB COLOR	SCR	0 ~ 23 STEP	10	
S-CORRECTION	SC	0 ~ 63 STEP	12	
RED DRIVE GAIN	RG	0 ~ 63 STEP	47	
GREEN DRIVE GAIN	GG	0 ~ 63 STEP	32	
BLUE DRIVE GAIN	BG	0 ~ 63 STEP	34	
CATHODE DRIVE LEVEL	CDL	0 ~ 7 STEP	4	
BLUE STRETCH MODE	BLU	0 ~ 3 STEP	0	
PAL VERTICAL SLOPE	PSL	0 ~ 63 STEP	32	
PAL VERTICAL SHIFT	PVS	0 ~ 63 STEP	32	
PAL VERTICAL AMPLITUDE	PVA	0 ~ 63 STEP	42	
PAL HORIZONTAL SHIFT	PHS	0 ~ 63 STEP	40	
NTSC SUB COLOR	NSR	0 ~ 23 STEP	7	
SUB TINT	STT	1 ~ 13 STEP	0	
TTX SUB-CONTRAST	TSS	0 ~ 63 STEP	16 (Only TTX Model)	

NOTE : PVS,PVA, PHS, parameters must be aligned using the 50Hz vertical-field rates.

4-2-3 Test Pattern (Aging Mode)

1. This mode can be used during servicing, or for confirming that the convergence and purity adjustments are correct.
2. Access the Test Pattern parameters by pressing a CHANNEL keys (▲, ▼) while the Service Mode is on. The cursor will move to the test pattern. Press the VOLUME keys. On-screen display:

• WHITE — NON -TTX MICOM ONLY

• AGING — TTX MICOM

3. AGING Mode (Reference Only)

This pattern is used for pre-heating the CRT during manufacturing —it is accessed in the factory by twice pressing the “SLEEP → FACTORY→FACTORY” key, then white pattern will be displayed.

Even if the TV power is cut off, the Aging Mode is not cancelled, The aging mode is cancelled by repressing the “FACTORY” key or pressing the local “CH UP/DOWN” keys.

4-2-4 Option Bytes

In the Service Mode, various can be selected via the Option Bytes (8 bits each). Example:

SYSTEM OSD DISPLAY		BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0 : 8	-			L (BIT : 0)	H (BIT : 8)	L (BIT : 0)	L (BIT : 0)	L (BIT : 0)
BYTE 1 : 0	-	L (BIT : 0)	L (BIT : 0)	L (BIT : 0)	L (BIT : 0)	L (BIT : 0)	L (BIT : 0)	L (BIT : 0)

TDA8842, CK SYSTEM, RCA JACK SYSTEM OSD DISPLAY

BYTE 0 : 11	—————	L (BIT : 1)	H (BIT : 0)	L (BIT : 0)	H (BIT : 0)	L (BIT : 1)
-------------	-------	-------------	-------------	-------------	-------------	-------------

4-2-4 (A) NON-TTX MICOM (SZM-173EC) OPTION BYTE (FOR CHINA/SINGAPORE/GERMAN ARMY)

	Destination	BYTE 0	BYTE 1
MP (Massproduction) OPTION BYTE	China	15	D8
	Singapore	57	58
	German Army	57	18

BYTE	BIT	LOW (0)	HIGH (1)	Application MICOM		
B Y T E 0	D7	NOT USED		MUST LOW		
	D6	TV : NORMAL → ZOOM A/V :NORMAL → ZOOM	TV: NORMAL → ZOOM → 16:9 A/V : NORMAL → ZOOM	MUST = LOW : China (only) 16 : 9 (Delete)		
	D5	NOT USED		MUST = LOW		
	D4	CH Up/down functional in the A/V Mode (SCART Jack)	CH Up/down not functional in the A/V Mode (RCA Jack)	MUST = HIGH		
	D3	Sound-I System Used	Sound-I System Not Used			
	D2	D2	COLOR SYSTEM		SOUND SYSTEM	
		D1	REMARK			
		0	0	● CK : AUTO (NO OSD)	"?" →B/G →D/K	China MP : CD German Army : CS
		0	1	● CW : ■ RF : AUTO → PAL → SECAM → NT4.43 ■ A/V : AUTO → PAL → SECAM → NT4.43 → NT3.58	"?" →B/G →D/K → I	
	1	0	● CD : ■ RF : AUTO → PAL → NT4.43 ■ A/V : AUTO → PAL → NT4.43 → NT3.58	"?" →D/K ↔ I		
1	1	● CS : ■ RF: AUTO → PAL → SECAM → NT4.43 → NT3.58 ■ A/V: AUTO → PAL → SECAM → NT4.43 → NT3.58	"?" → B/G → D/K → (I) → NT- M			
D0		TDA8374A	TDA8842	IC201 (ONE-CHIP) OPTION		
B Y T E 1	D7	TV OUT	MONITOR OUT	HIGH (For China)		
	D6	English ONLY	English/Chinese	MUST = HIGH		
	D5	AFT ON (always)	AFT OFF (after fine tuning)	BASIC = LOW		
	D4	Existing Sharpness level (when using the TDA6108 RGB AMP)	Sharpness level up (when using the TDA6107Q RGB AMP)	BASIC = HIGH		
	D3	No Auto Power On	Auto Power On	BASIC = HIGH		
	D2	NTSC : 25KHz (NTSC TABLE) PAL : 50KHz (PAL TABLE)	NTSC : 25KHz (NTSC TABLE) PAL : 27KHz (NTSC TABLE)			
	D1	NOT USED (D1 D0 = MUST 00)				
	D0					

- Function Required : 1. PICTURE OFF (after 15 minutes) during no signal
- 2. AUDIO MUTE during no signal
- 3. BLUE SCREEN ON/OFF
- 4. TIMER CLOCK ON/OFF
- 5. No CHILD LOCK

4-2-4 (B) NON-TTX MICOM (SZM-173EW/EE) OPTION BYTE (FOR EUROPE)

		Destination	BYTE 0	BYTE 1
MP OPTION BYTE		United Kingdom	C3	98
		France/Swiss	45	9E
		Western Europe (except UK)	45	98
		Eastern Europe	41	58

BYTE	BIT	LOW(0)	HIGH(1)	Remark
B Y T E 0	D7	3 BAND	UHF ONLY	HIGH (UK only)
	D6	TV : NORMAL → ZOOM A/ : NORMAL → ZOOM	TV : NORMAL → ZOOM → 16:9 A/V : NORMAL → ZOOM	MUST = HIGH
	D5	MUST LOW		POLAND OPTION - R 913 : 680Ω added - J901 : delete
	D4	CH Up/down functional in the A/V Mode (SCART Jack)	CH Up/down not functional in the A/V Mode (RCA Jack)	MUST = LOW
	D3	NOT USED		MUST = LOW
	D2	D2 D1 SOUND SYSTEM	COLOR SYSTEM	Destination
		0 0 "?" → B/G ↔ D/K : CK MODEL	AUTO : NO OSD	Eastern Europe/France/Swiss
	D1	0 1 I ONLY (NO OSD) : CI,CII MDL		United Kingdom
		1 0 B/G ONLY (NO OSD) : CB,CX MDL		Western Europe
		1 1 NOT USED		
D0	TDA8374A	TDA8842	IC201 (ONE-CHIP) OPTION	

B Y T E 1	D7		English/German/Dutch/Italian/Spanish/Swedish/Croatian/Yugo/Greek/French	Western Europe (SZM-173EW)
	D6		English/Romanian/Hungarian/Polish/Czech/Bulgarian	Eastern Europe (SZM-173EE)
	D5	AFT ON (always)	AFT OFF (after fine tuning)	MUST = LOW
	D4	Existing sharpness level : TDA6108	Sharpness level up : TDA6107Q	MUST = HIGH
	D3	No Auto Power On	Auto Power On	MUST = HIGH
	D2	NTSC : 25 KHz (NTSC TABLE) PAL : 50 KHz (PAL TABLE)	NTSC : 25KHz(NTSC TABLE) PAL : 27KHz(NTSC TABLE)	- France/ Swiss : HIGH - Others : LOW
	D1	PAL / SECAM	SECAM - L	- France/Swiss (only) : HIGH - SZM-173EW (only)
	D0	MUST : LOW		

● P-STD Classification (CON./BRI./SHAR./COL)

STANDARD MODE	DYNAMIC MODE	MOVIE MODE	MILD MODE	CUSTOM MODE
90/50/50/50	100/50/75/50	90/50/75/50	60/50/50/50	90/50/50/50

- Function Required: 1. PICTURE OFF (after 15 minutes) during no signal. 2. AUDIO MUTE during no signal. 3. No BLUE SCREEN during no RF signal (Blue Screen during AV). 4. No TIMER. 5. No CHILD LOCK. 6. See "Detailed functions of CF".

4-2-4 C) NON-TTX MICOM (SZM-173ER) OPTION BYTE (FOR RUSSIA)

Destination	BYTE 0	BYTE 1
Russia,CIS	49	58
Australia	5D	18
India (CB MONO MODEL)	5D	38

BYTE	BIT	LOW(0)	HIGH(1)	Remark		
B Y T E 0	D7			MUST = LOW		
	D6	TV : NORMAL → ZOOM A/V : NORMAL → ZOOM	TV : NORMAL → ZOOM → 16:9 A/V : NORMAL → ZOOM	MUST = HIGH		
	D5			MUST = LOW		
	D4	CH Up/down functional in the A/V Mode (SCART Jack)	CH Up/down not functional in the A/V Model (RCA Jack)			
	D3	PAL-I Used	PAL-I Not Used	MUST = HIGH		
	D 2	D2	SOUND SYSTEM		COLOR SYSTEM	
			D2	D1	"?" → B/G ↔ D/K : CK MODEL	AUTO : NO OSD
			0	1	I ONLY (NO OSD) : CI,CII MDL	
			1	0	B/G ONLY (NO OSD) : CB,CX MDL	
	D 1	D1	1	1	NOT USED	
D0			TDA8374A	TDA8842	IC201 (ONE-CHIP) OPTION	
B Y T E 1	D7			MUST = LOW		
	D6	English	English/Russian			
	D5	AFT ON (always)	AFT OFF (after fine tuning)	BASIC = LOW (India HIGH)		
	D4	Existing sharpness level (when using the TDA6108 RGB AMP)	Sharpness level up (when using the TDA6107Q AMP)	MUST = HIGH		
	D3	No Auto Power On	Auto Power On	BASIC = HIGH		
	D2	NTSC: 25 KHz (NTSC TABLE) PAL : 50 KHz (PAL TABLE)	NTSC : 25 KHz (NTSC TABLE) PAL : 27 KHz (NTSC TABLE)			
	D1	NOT USED (MUST = LOW)				
	D0					

● P-STD Classification (CON/BRI/SHAR/COL)

STANDARD MODE	DYNAMIC MODE	MOVIE MODE	MILD MODE	CUSTOM MODE
90/50/50/50	100/50/75/50	90/50/75/50	60/50/50/50	90/50/50/50

- Function Required : 1. PICTURE OFF (after 15 minutes) during no signal
- 2. AUDIO MUTE during no signal
- 3. BLUE SCREEN available
- 4. TIMER available
- 5. No CHILD LOCK

4-2-4 (D) NON-TTX MICOM (SZM-173AR/EA) OPTION BYTE (FOR MIDDLE EAST/AFRICA)

		Destination		BYTE 0	BYTE 1
MP OPTION BYTE		Middle East (EA or AR)		7F	58
		Africa (EA)		67	D8

BYTE	BIT	LOW (0)	HIGH (1)	Remark		
B Y T E 0	D7			MUST = LOW		
	D6	TV : NORMAL → ZOOM A/V : NORMAL → ZOOM	TV : NORMAL → ZOOM → 16:9 A/V : NORMAL → ZOOM	MUST = HIGH		
	D5	NOT USED	CHILD LOCK ON	MUST = HIGH		
	D4	CH Up/down functional in the A/V Mode (SCART Jack)	CH Up/down not functional in the A/V Model (RCA Jack)	Middle East : HIGH Africa : LOW		
	D3	Sound-I System Used	Sound-I System Not Used	Middle East : HIGH Africa : LOW		
	D 2	D2	D2	COLOR SYSTEM		SOUND SYSTEM
			D1	● CK : AUTO (NO OSD)		"?" → B/G → D/K
		D1	D2	● CW : -. RF : AUTO → PAL → SECAM → NT4.43 -. A/V : AUTO → PAL → SECAM → NT4.43 → NT3.58		"?" → B/G → D/K → I
			D1	● CB : -. RF : PAL ONLY -. A/V : AUTO → PAL → NT4.43 → NT3.58		B/G ONLY (NO OSD)
	D 1	D2	● CS : -. RF : AUTO → PAL → SECAM → NT4.43 → NT3.58 -. A/V : AUTO → PAL → SECAM → NT4.43 → NT3.58		"?" → B/G → D/K → I → NT-M →	
D1						
D0		TDA8374A	TDA8842	IC201 (ONE-CHIP) OPTION		

B Y T E 1	D7	D7	D6	LANGUAGE	Remark
		0	0	-	NOT USED
		0	1	ENG / ARAB	Middle East
		1	0	-	NOT USED
	D6	1	1	ENG / ARAB / FRENCH	EA VERSION (Africa ONLY)
D5	AFT ON (always)		AFT OFF after fine tuning		MUST = LOW
D4	Existing sharpness level (when using the TDA6108 RGB AMP)		Sharpness level up (when using the TDA6107Q RGB AMP)		MUST = HIGH
D3	No Auto Power On		Auto Power On		MUST = HIGH
D2	NTSC : 25 KHz (NTSC TABLE) PAL : 50 KHz (PAL TABLE)		NTSC : 25 KHz (NTSC TABLE) PAL : 27 KHz (NTSC TABLE)		
D1					
D0	MUST : DO D1 = 00				

- Function Required : 1. PICTURE OFF (after 15 minutes) during no signal
- 2. AUDIO MUTE during no signal.
- 3. BLUE SCREEN ON/OFF
- 4. TIMER (CLOCK ON/OFF)
- 5. CHILD LOCK ON (always)

4-2-4 (E) NON-TTX MICOM (SZM-173EV/ET) OPTION BYTE (FOR ASIA)

	DESTINATION	LINE-STREEO		MONO(TV-OUT)		MONO(MONO-OUT)	
		BYTE 0	BYTE 1	BYTE 0	BYTE 1	BYTE 0	BYTE 1
OPTION - BYTE	Vietnam / Malaysia	DF	D8	5F	58	5F	D8
	Indonesia (CB MODEL CLOCK ON)	DD	DA	5D	5A	5D	DA
	Thailand (CB MODEL)	-		5D	58	5D	D8
	India (CB MODEL AFT OFF)	DD	B8	-	-	-	-
	India (CS MODEL AFT OFF)	DF	B8	5F	38	5F	B8

BYTE	BIT	LOW (0)	HIGH (1)	Remark	
B Y T E 0	D7	LINE STEREO OFF	LINE STEREO ON	SZM-173EV (only)	
	D6	TV : NORMAL → ZOOM A/V : NORMAL → ZOOM	TV : NORMAL → ZOOM → 16:9 A/V : NORMAL → ZOOM	MUST = HIGH	
	D5			MUST = LOW	
	D4	CH Up/down functional in the A/V Mode (SCART Jack)	CH Up/down not functional in the A/V Mode (RCA Jack)	BASIC = HIGH	
	D3	Sound-I System Used	Sound-I System Not Used	MUST = HIGH	
	D2	D2	COLOR SYSTEM		SOUND SYSTEM
		D1	Destination		
		D0			
	D2	D2	0 0 ● CK :AUTO (NO OSD)	"?" → B/G→ D/K	
	D2	D1	0 1 ● CW : - RF : AUTO → PAL → SECAM → NT4.43 - A/V : AUTO → PAL → SECAM → NT4.43 → NT3.58	"?" → B/G → D/K → I	
D1	D1	1 0 ● CB : - RF : PAL ONLY - A/V : AUTO → PAL → NT4.43 → NT3.58	B/G ONLY (NO OSD)	Indonesia/Thailand/India	
D1	D0	1 1 ● CS: - RF : AUTO → PAL → SECAM → NT4.43 → NT3.58 -A/V : AUTO → PAL → SECAM → NT4.43 → NT3.58	"?" → B/G→D/K → I NT- M→	Vietnam Malaysia	
D0		TDA8374A	TDA8842	IC201 (ONE-CHIP) OPTION	
B Y T E 1	D7	TV OUT	MONITOR OUT		
	D6	English ONLY	English/Vietnamese/Indonesian/Malay	SZM-173EV	
			English/Thai	SZM-173ET	
	D5	AFT ON (always)	AFT OFF (after fine tuning)		
	D4	Existing sharpness level (when using the TDA6108 RGB AMP)	Sharpness level up (when using the TDA6107Q RGB AMP)	MUST = HIGH	
	D3	No Auto Power On	Auto Power On	BASIC = HIGH	
	D2	NTSC : 25KHz (NTSC TABLE) PAL : 50KHz (PAL TABLE)	NTSC : 25KHz (NTSC TABLE) PAL : 27KHz (PAL TABLE)	MUST = LOW	
	D1	CLOCK DISPLAY OFF	CLOCK DISPLAY ON	Indonesia ONLY : HIGH	
D0	MUST = LOW				

- Function Required : 1. PICTURE OFF (after 15 minutes) during no signal. 2. AUDIO MUTE during no signal. 3. BLUE SCREEN ON/OFF. 4. TIMER (CLOCK ON/OFF). 5. No CHILD LOCK

SZM -173ET (16K) : Z90203 → WITHOUT LINE STEREO
 SZM -173EV (24K) : Z90234 → WITH LINE STEREO

4-2-4 (F) TTX MICOM (SZM-175EA/EP) OPTION BYTE (FOR MIDDLE EAST ASIA)

MP OPTION BYTE	Destination	Application MICOM	BYTE0	BYTE1
	Iran (Persian TTX)	SPM-175EP	1F	1B
	Middle East (except Iran)	SPM-175EA	1F	1B
	Africa		07	1B

BYTE	BIT	LOW (0)	HIGH (1)	Application MICOM										
B Y T E 0	D7	NOT USED		ALL = LOW										
	D6	TV : NORMAL → ZOOM → 16:9 A/V : NORMAL → ZOOM	TV : NORMAL → ZOOM → 16:9 A/V : NORMAL → ZOOM → 16:9	MUST = LOW										
	D5	NOT USED		ALL = LOW										
	D4	CH Up/down functional in the A/V Mode (SCART Jack)	CH Up/down not functional in the A/V Mode (RCA Jack)	- Africa : SCART - Others : RCA										
	D3	Sound-I System Used	Sound-I System Not Used	SOUND-I : Africa (only)										
	D2	D2	D1	COLOR SYSTEM	SOUND SYSTEM	Remark								
		0	0	● CK : AUTO (NO OSD)	"?" → B/G → D/K	No sound system in the A/V MODE								
		0	1	● CW : ■ RF : AUTO → PAL → SECAM → NT4.43 ■ A/V : AUTO → PAL → SECAM → NT4.43 → NT3.58	"?" → B/G → D/K → I →									
		1	0	● CB : ■ RF : PAL ONLY (NO OSD) ■ A/V : AUTO → PAL → NT4.43 → NT3.58	B/G ONLY (NO OSD)									
	1	1	● CS : ■ RF : AUTO → PAL → SECAM → NT4.43 → NT3.58 ■ A/V : AUTO → PAL → SECAM → NT4.43 → NT3.58	"?" → B/G → D/K → I → NT → M →										
D0	TDA8374A		TDA 8842											
B Y T E 1	D7	NOT USED		ALL (FIX = LOW)										
	D6	NOT USED												
	D5	NOT USED												
	D4	Existing sharpness level (when using the TDA6108 RGB AMP)	Sharpness level up (when using the TDA6107Q RGB AMP)	ALL (BASIC = HIGH) → TEST Unnecessary										
	D3	No Auto Power On	Auto Power On	ALL (BASIC = HIGH)										
	D2	NTSC : 25 KHz (NTSC TABLE) PAL : 50 KHz (PAL TABLE)	NTSC : 25 KHz (NTSC TABLE) PAL : 27 KHz (NTSC TABLE)											
	D1	<table border="1"> <tr> <td>D1 D0</td> <td>00</td> <td>01</td> <td>10</td> <td>11</td> </tr> <tr> <td></td> <td>B/G</td> <td>D/K</td> <td>I</td> <td>?</td> </tr> </table>			D1 D0	00	01	10	11		B/G	D/K	I	?
D1 D0	00	01	10	11										
	B/G	D/K	I	?										
D0														

● OSD language by micom

1. Persian (for Iran) : SPM-175EP : English/Persian (Iranian)
2. Arab (Middle East, Africa) : SPM-175EA : English/French/Arabian

● Function Required :

1. PICTURE OFF (after 15 minutes) during no signal
2. AUDIO MUTE (during no signal)
3. No BLUE SCREEN
4. No TIMER
5. No CHILD LOCK

4-2-4 (G) TTX MICOM (SPM-175EE/ER/EG) OPTION BYTE (FOR EUROPE)

Destination	Application MICOM	BYTE 0	BYTE 1	LANGUAGE
United Kingdom (CI)	SPM-175EE	83	18	See BYTE 1 D5
Other Western Europe (CB)		05	18	
Eastern Europe (CK)		01	38	
Ireland (CII)		03	18	
France/Swiss	SPM-175EU	05	5C	
Yugo/Greece	SPM-175EG	05	18	English/Yugo/Greek
Russia/Bulgaria	SPM-175ER	01	19	English/Russian/Bulgarian

BYTE	BIT	LOW(0)	HIGH(1)	Remark		
B Y T E 0	D7	3 BAND	UHF DNLY (UK only)			
	D6	TV : NORMAL → ZOOM → 16:9 A/V : NORMAL → ZOOM	TV : NORMAL → ZOOM → 16:9 A/V : NORMAL → ZOOM → 16:9			
	D5	MUST = LOW	< POLAND OPTION > R 913 : 680Ω added. J901 : Delete			
	D4	CH Up/Down functional in the A/V Mode (SCART Jack)	CH Up/Down not functional in the A/V Model (RCA Jack)	MUST = LOW		
	D3	P-STD NORMAL	P-STD MAX	MUST = LOW		
	D2	D2	D1	SOUND SYSTEM	COLOR SYSTEM	Remark
		0	0	"?" → B/G ↔ D/K : CK MODEL	AUTO (NO OSD)	No SOUND SYSTEM in the A/V Mode
		0	1	I ONLY (NO OSD) : CI,CII MODEL		
		D1	1	0		
	1		1	NOT USED		
D0	TDA8374A	TDA8842				
B Y T E 1	D7	NOT USED		FIX = LOW		
	D6	PAL/SECAM	SECAM - L	HIGH (CF only)		
	D5	English/German/French/Dutch/Italian/Spanish/Swedish	English/Croatian/Romanian/Hungarian/Polish/Czech	This bit is only applied to SPM-175EE		
	D4	Existing sharpness level (when using the TDA6108 RGB AMP)	Sharpness level up (when using the TDA6107Q AMP)	ALL BASIC = HIGH → TEST Unnecessary		
	D3	No Auto Power On	Auto Power On	ALL BASIC = HIGH		
	D2	NTSC : 25KHz (NTSC TABLE) PAL : 50KHz (PAL TABLE)	NTSC : 25KHz (NTSC TABLE) PAL : 27KHz (NTSC TABLE)	ALL (RF VOL. CURVE) BASIC = LOW		
	D1	MUST = LOW				
	D0	B/G	D/K	175ER is only applied (Others = LOW)		

● P-STD Classification (CON/BRI/SHRP/COL)

D3 BIT	STANDARD MODE	DYNAMIC MODE	MOVIE MODE	MILD MODE	CUSTOM MODE
0	90/50/50/50	100/50/50/50	75/55/50/50	60/50/50/50	90/55/25/50

- Function Required : 1. PICTURE OFF (after 15 minutes) during no signal. 2. AUDIO MUTE (during no signal). 3. No BLUE SCREEN. 4. No TIMER (CLOCK /OFF). 5. No CHILD LOCK

4-2-5 RESET

The Reset Mode is used during factory inspection.
Function Reset:

1. Channels	Add/Erase
2. Sort	Non
3. System	Auto
4. Timer	off
5. Blue Screen	off
6. Child Lock	off
7. Picture	standard
8. Volume	10
9. CH. Skip	Erased

4-3 Other Adjustments

4-3-1 General

1. Usually, a color TV needs only slight touch-up adjustment upon installation. Check the basic characteristics such as height, horizontal and vertical sync and focus.
2. The picture should have good black and white details. There should be no objectionable color shading; if color shading is present, perform the purity and convergence adjustments described below.
3. Use the specified test equipment or its equivalent.
4. Correct impedance matching is essential.
5. Avoid overload. Excessive signal from a sweep generator might overload the front-end of the TV. When inserting signal markers, do not allow the marker generator to distort test results.
6. Connect the TV only to an AC power source with voltage and frequency as specified on the backcover nameplate.
7. Do not attempt to connect or disconnect any wires while the TV is turned on. Make sure that the power cord is disconnected before replacing any parts.
8. To protect against shock hazard, use an isolation transformer.

4-3-2 Automatic Degaussing

A degaussing coil is mounted around the picture tube, so that external degaussing after moving the TV should be unnecessary. But the receiver must be properly degaussed upon installation.

The degaussing coil operates for about 1 second after the power is switched ON. If the set has been moved or turned in a different direction, disconnect its AC power for at least 30 minutes.

If the chassis or parts of the cabinet become magnetized, poor color purity will result. If this happens, use an external degaussing coil. Slowly move the degaussing coil around the faceplate of the picture tube and the sides and front of the receiver. Slowly withdraw the coil to a distance of about 6 feet before removing power.

4-3-3 High Voltage Check

CAUTION: There is no high voltage adjustment on this chassis. The B+ power supply must be set to +125 volts (Full color bar input and normal picture level).

1. Connect a digital voltmeter to the second anode of the picture tube.
2. Turn on the TV. Set the Brightness and Contrast controls to minimum (zero beam current).
3. The high voltage should not exceed 27.5KV.
4. Adjust the Brightness and contrast controls to both extremes. Ensure that the high voltage does not exceed 27.5KV under any conditions.

4-3-4 FOCUS Adjustment

1. Input a black and white signal.
2. Adjust the tuning control for the clearest picture.
3. Adjust the FOCUS control for well defined scanning lines in the center area of the screen.

4-3-5 Cathode Voltage Adjustment (Screen Adjustment)

1. Connect CRT socket pin GK to an oscilloscope probe.
2. Input a gray scale pattern. (Use a pattern generator, PM5518)
3. Use the P mode key (on the remote control) for the STANDARD picture.
4. Adjust the Screen VR (on the FBT) so that the voltage on the oscilloscope becomes $130 \pm 2.5V$ (See Fig. 4-1).

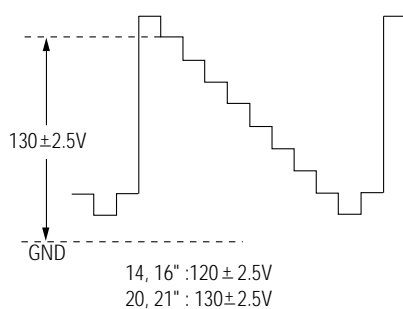


Fig. 4-1

4-3-6 Purity Adjustment

1. Warm up the receiver for at least 20 minutes.
2. Plug in the CRT deflection yoke and tighten the clamp screw.
3. Plug the convergence yoke into the CRT and set in as shown in Fig. 4-2.
4. Input a black and white signal.
5. Fully demagnetize the receiver by applying an external degaussing coil.
6. Turn the CONTRAST and BRIGHTNESS controls to maximum.
7. Loosen the clamp screw holding the yoke. Slide the yoke backward or forward to provide vertical green belt. (Fig. 4-3).
8. Tighten the convergence yoke.
9. Slowly move the deflection yoke forward, and adjust for the best overall green screen.
10. Temporarily tighten the deflection yoke.
11. Produce blue and red rasters by adjusting the low-light controls. Check for good purity in each field.
12. Tighten the deflection yoke.

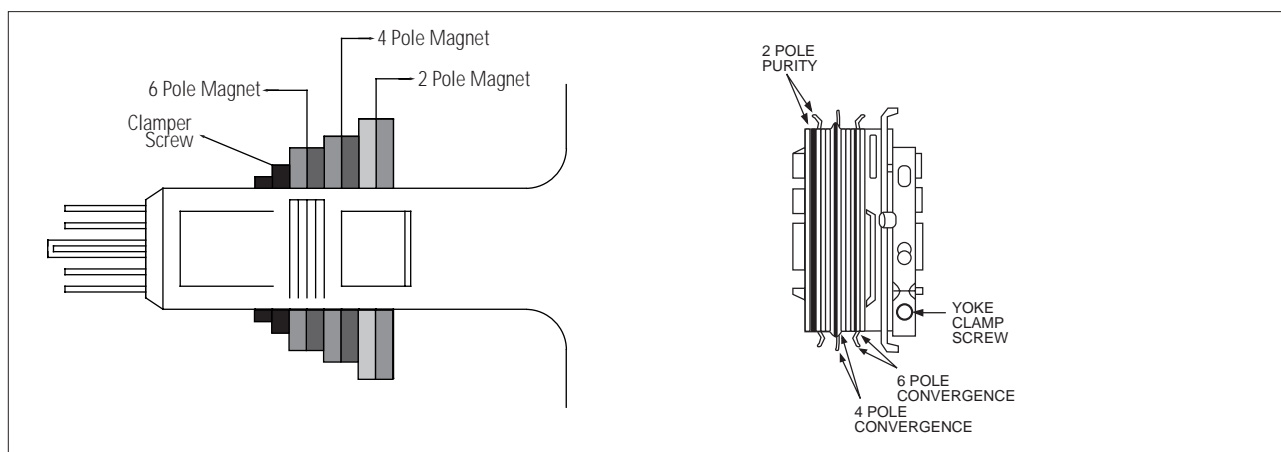


Fig. 4-2 Convergence Magnet Assembly

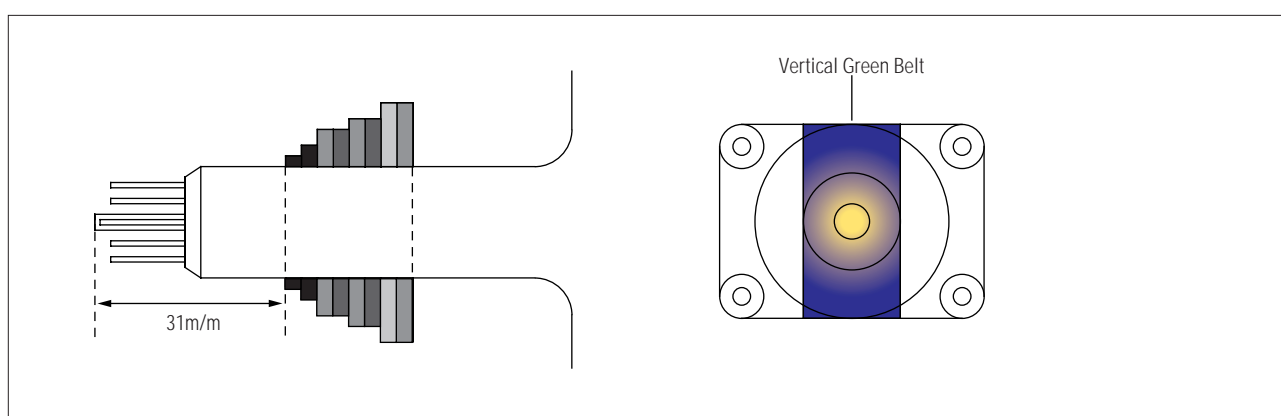


Fig. 4-3 Center Convergence Adjustment

4-3-7 White Balance Adjustment

(a) Set up

1. Warm up the TV for at least 30 minutes in the Aging Mode (OSD White). This mode is displayed by entering the following sequence:

SLEEP →FACTORY → FACTORY

2. Input a Toshiba pattern.

(b) Low-Light Adjustment

1. Set SBT to 1.3 ± 0.2 fL in the Factory Service Mode with using CA100. See Fig. 4-4 ②.
2. Adjust RG,BG so that the levels are suitable to each local area.

(c) High-Light Adjustment

1. Set SCT to 55 FL (20" . 21"), 65 FL(14" .16") in the Factory Service Mode with using CA100. See Fig. 4-4 ①.

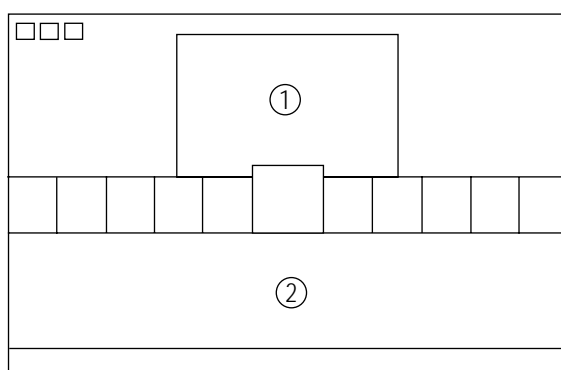


Fig. 4-4

4-3-8 Center Convergence Adjustment

1. Warm up the receiver for at least 20 minutes.
2. Adjust the two tabs of the 4 pole magnets to change the angle between them. Superimpose the red and blue vertical lines in the center area of the screen.
3. Adjust the Brightness and Contrast controls for a well defined picture.
4. Adjust the two-tab pairs of the 4 pole magnets, and change the angle between them. Superimpose the red and the blue vertical lines in the center area of the screen.
5. Turn the both tabs at the same time, keeping the angle constant, and superimpose the red and blue horizontal line in the center of the screen.
6. Adjust the two-tab pairs of the 6-pole magnets to superimpose the red and blue line onto the green. (Changing the angle affects the vertical lines, and rotating both magnets affects the horizontal lines.)
7. Repeat adjustments 2~6, if necessary.
8. Since the 4-pole magnets and 6-pole magnets interact, the dot movement is complex (Fig. 4-5).



Fig. 4-5 Center Convergence Adjustment

4-3-9 VCO Adjustment

Set the vco data to 80 (Factory Mode).

NOTE : For SZM-173EW and SPM-175E (Western Europe remote control), set the VCO data to 1.

4-3-10 RF AGC Adjustment

Set the AGC data to 14 (Factory Mode).

4-3-11 Sub-Color Adjustment

Set SCR data to 10 (Factory Mode).

4-3-12 Geometry Adjustment

SC →PVA→PVS→ PSL →PHS

1. Input a lion head pattern (in the PAL channel).
2. Set the SC (S-Correction) as follows : 12 (21"), 10 (20"), 0 (14",16") and PVA 40 so that the lion head circle becomes oval.
3. Adjust with PVS (Vertical shift) so that the top margin of the picture is 4.




Fig. 4-7

4. Adjust with PSL (Vertical-Slope) so that the bottom margin of the picture is 4.




Fig. 4-8

5. Adjust with PHS (Horizontal Shift) so that the lion-head pattern and CRT centers are aligned.





Fig. 4-9

6. Adjust PHS (using the width coil) so that the left and right margins of the picture are 5.


MEMO

5. Troubleshooting


5-1 No Video (Raster On, No Sound)

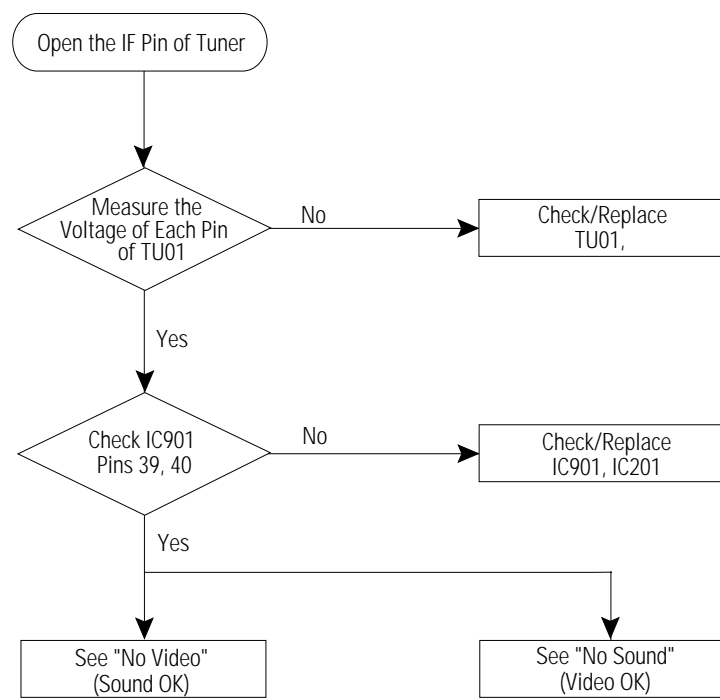


5-2 No Power

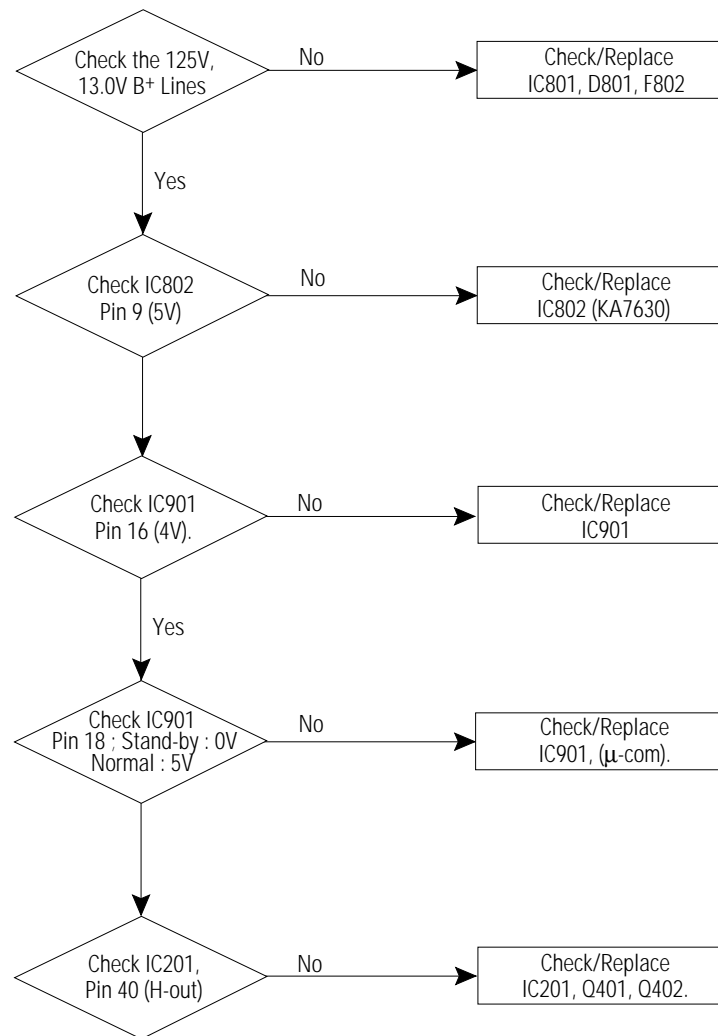


5-3 No Video (Sound OK)

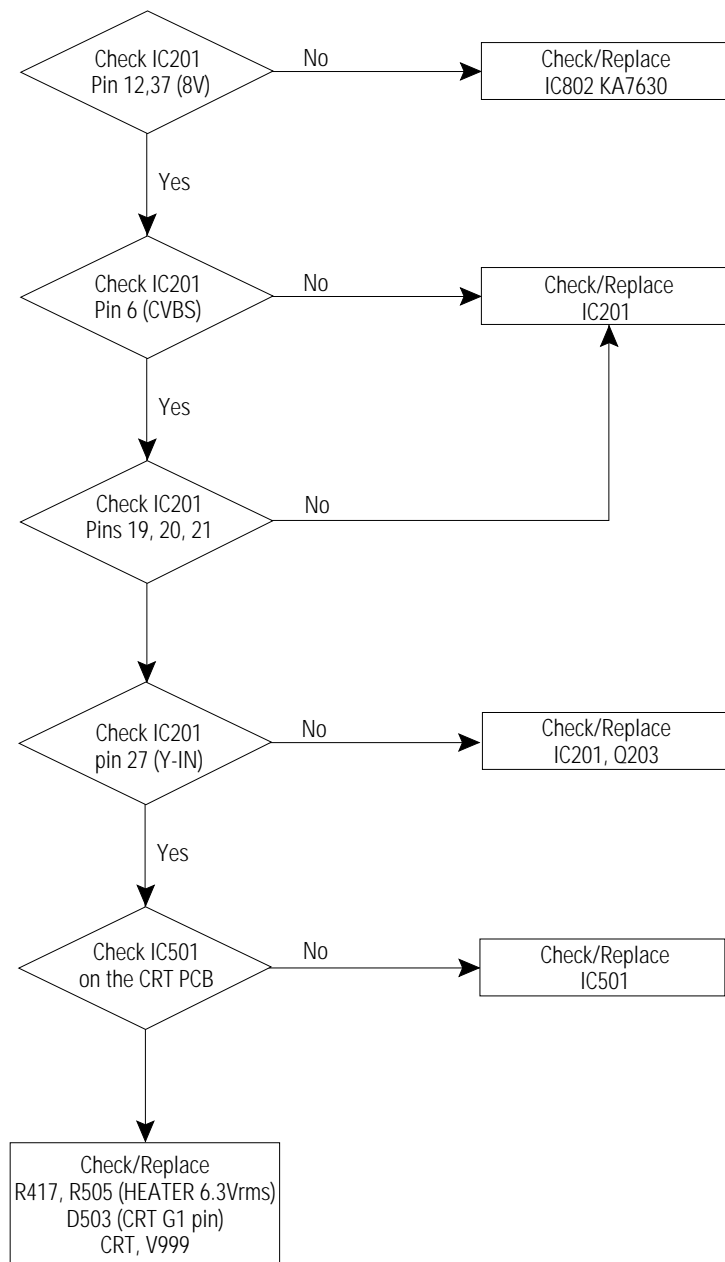

5-4 No Sound (Video OK)

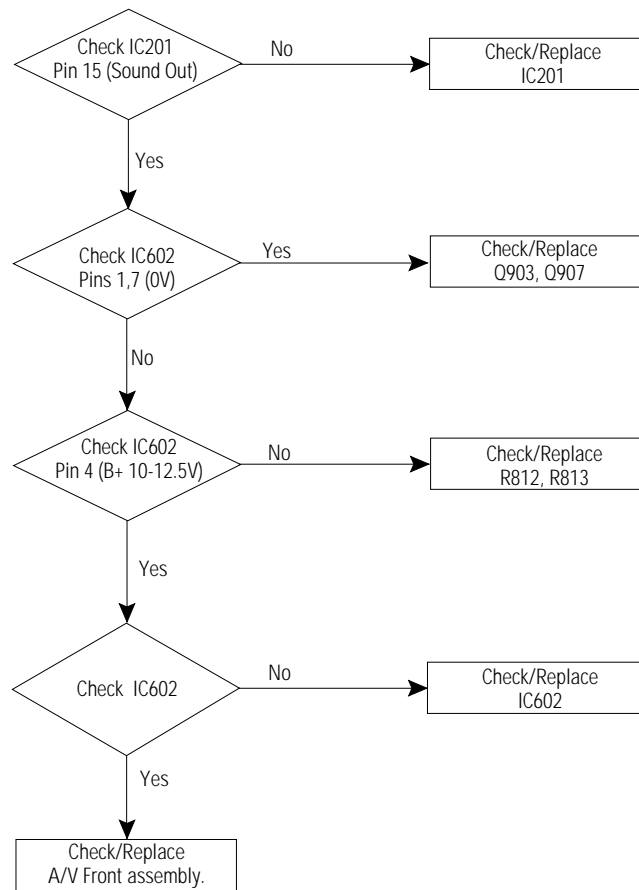


5-5 No TTX

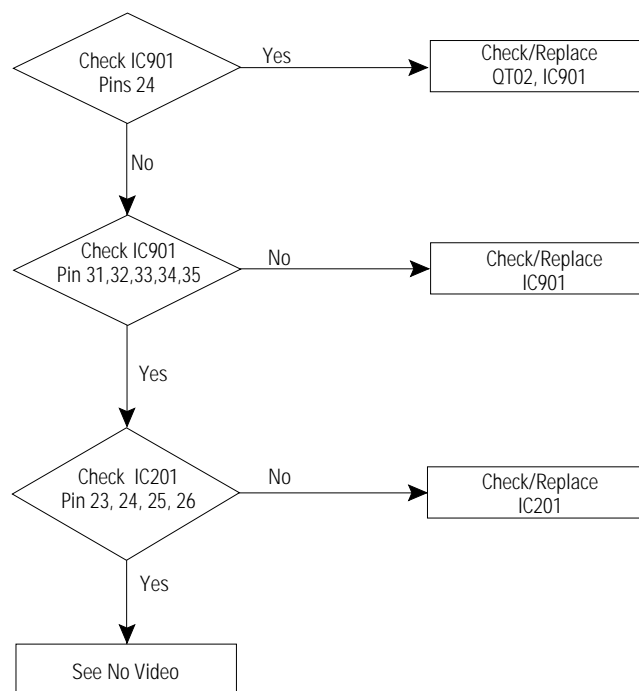

6. Exploded View & Parts List

6-1 CK5073T5X

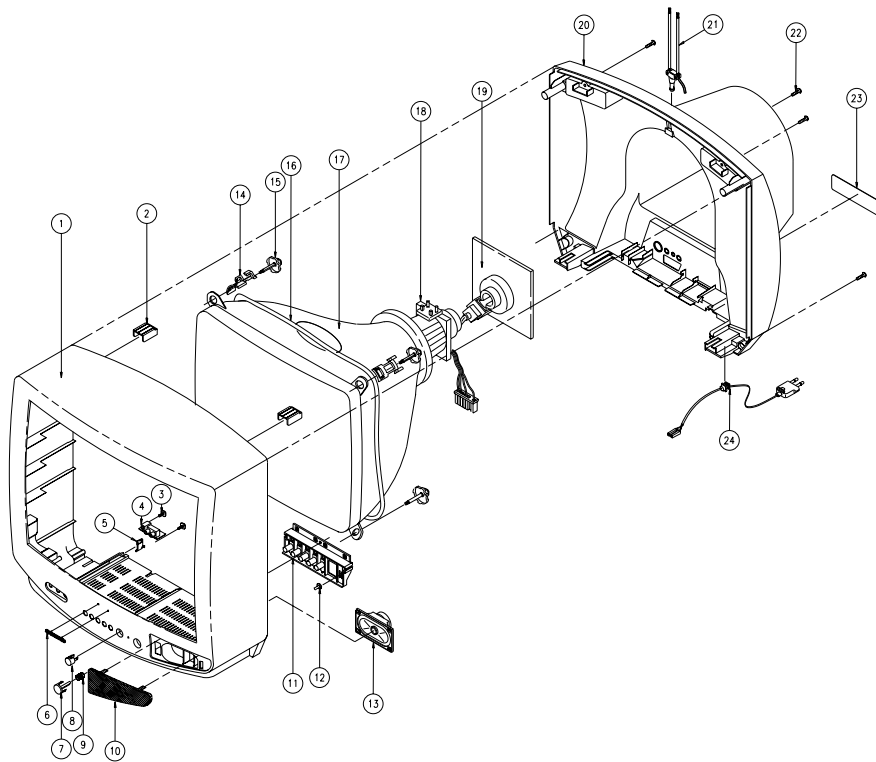

No	Code No	Description	Specification	Q'ty	Remark
1	HA91-100001	ASSY-CABINET,FRONT	5073	1	
	HA64-300008	CABINET-FRONT	DP,5073,-,HIPS,HB,BLK,-,-	1	
2		ASSY-CABINET,OPTION			
3	AA60-10002A	SCREW-TAPPING	RH,+M4,L12,ZPC(YEL),-,OD14	2	
4	HA95-900003	ASSY-PCB,A/V FRONT	73,SCT13B,S15A	1	
5	AA61-40007A	STOPPER-PCB	-,ABS HB,-,-,NTR,5038,5368	1	
6	AA64-70015A	BADGE-BRAND	-,AL,-,L45,SILVER,R2000 SS 22,	1	
7	AA64-10131C	KNOB-POWER	ABS,HB,BLK,5073MASTER	1	
8	AA64-40044A	WINDOW-REMOCON	-,ABS,HB,-,NO-SILK,5073,-	1	
9	AA61-60003T	SPRING-CS	-,SUS304,0.5,OD7,H13.5,N5,-,	1	
10	AA63-50096A	GRILLE-WOOFER	DP,-,-,-,AA63-50095A,5073	1	
11	AA64-10039A	KNOB-CONTROL	-,5073,-,ABS,HB,BLK	1	
12	AA64-40182A	INDICATOR-LED	-,ACRYL,-,-,-,5073,-	1	
13	3001-000003	SPEAKER	3W,16OHM,88DB,180HZ	1	
14	AA65-30107A	CLAMP-D,COIL	NYLON 66,V2,NTR,-,20-22 INCH,-	4	
15	AA60-10050R	SCREW-ASSY	WC,HH,+M5,L31.5,SWRCH18A,ZPC(4	
16	AA27-20003Y	COIL-DEGAUSSING	-,20,15.2OHM,28T,L2170,E	1	
17	AA03-10031D	CRT-COLOR	-,A48ECR141X,+400MG,20,90DEG	1	
18	AA27-50005H	DEFLECTION-YOKE	-,DSE-2093BL,20/A48ECR141X,ST	1	
19	3704-001090	SOCKET-CRT	9P15,24PI,26.5PI,SN,-	1	
20	HA64-300016	CABINET-BACK	DP,5073,HIPS,V2,BLK,-,-	1	
21	AA42-10001D	ANT-ROD	DP,4S,620MM,SUS,UL/CS	1	
22	6002-000514	SCREW-TAPPING	RH,+2,M4,L15,ZPC(BLK),SWRCH18	4	
23		ASSY-CABINET,OPTION			
24	AA96-20077B	ASSY-POWER,CORD	SCT11D	1	

7. Electric Parts List

7-1 CK3373T5X (CK5073T5X AND CK3373T5X Dissimilar Parts)

Loc. No.	Code No.	Description ; Specification	Remark	Loc. No.	Code No.	Description ; Specification	Remark
ASSY-PCB,MAIN				ASSY-CABINET OPTION (CK3373T5X)			
		BUYER : BOLI (BG)				HA91-100004 ASSY-CABINET,FRONT:3373	
*	HA94-100124	ASSY-PCB,MAIN:CK3373T5X/BOB,S15A		*	HA64-300011	CABINET-FRONT:DP,3373,-,HIPS,HB,BLK,-,-	
		BUYER : SEPOL			HA64-300018	CABINET-BACK:DP,3373,HIPS,V2,BLK,-,-	
*	HA94-100286	ASSY-PCB,MAIN:CK3373T5X/XEO,S15A			AA65-30016A	CLAMP-D,COIL,-,NYLON,V0,NTR,DADH-360	
C409	2303-001027	C-FILM,PPF:4.7NF,5%,1600V,31X16X9,20MM			AA61-60003J	SPRING-CS,-,-,SUS304,0.5,OD6,H12,N7,-,-	
C410	2201-000406	C-CERAMIC,DISC:270PF,10%,2KV,Y5P,8X5.5TP			AA64-10043A	KNOB-CONTROL,-,3373,-,ABS,HB,BLK	
C416	2306-001004	C-FILM,MPPF:300NF,5%,400V,TP,26X14X21MM,			AA64-10137A	KNOB-POWER,-,ABS,HB,BLK,-,3373	
CN501	AA39-20109A	LEAD-CONNECTOR,ASSY,-,YBNH025-08,S,8P,40			AA64-40051A	WINDOW-REMOCON:3373,-,ABS,HB,-,NO,SILK	
CN802	AA27-20003U	COIL-DEGAUSSING,-,14,16.4OHM,75T,890MM			AA64-40184A	INDICATOR-LED,-,ACRYL,-,-,-,3373,-	
		BUYER : BOLI (BG) ; ONLY (IC901)			AA64-70009F	BADGE-BRAND,-,AL,-,L40,SILVER,R800	
△ IC901	AA13-30019H	IC-MCU:SAA5291PS-097,8BIT,SDIP,175ER					
L401	AA27-30003R	COIL-LINEARITY,-,220UH,YL10X10,0.35MM,23					
LW01	AA27-40001M	COIL-HORIZ,WIDTH,-,180/480UH,SB-5S6202.6					
R302	2003-001043	R-METAL OXIDE(S):510OHM,5%,1W,AF,TP,2.5X					
R305	2004-004087	R-METAL(S):1.5OHM,1%,1/2W,AA,TP,2.5X6.5M					
R417	2008-000259	R-FUSINLE(S):1.8 OHM,5%,2W,AA,TP,3.9X10MM					
R420	2004-002015	R-METAL(S)140KOHM,1%,-,1/2W,AA,TP,2.4X6.4					
R611	2001-000258	R-CARBON:1.8KOHM 5% 1/8W AA, TP 1.8X3.2M					
R814	2008-000271	R-FUSIBLE(S):3.3OHM,5%,2W,AA,TP,3.9X10MM					
R815	2008-000271	R-FUSIBLE(S):3.3OHM,5%,2W,AA,TP,3.9X10MM					
△ T444	AA26-30005L	TRANS-FLYBACK,-,FSA38019S,14,125V					
△ V999	3704-001089	SOCKET-CRT:7P,22.5PI,12PI,SN,					
		BUYER : SEPOL ; ONLY (C307,C419,IC901,LD901)					
C307	2305-000149	C-FILM,MPEF:100NF,5% 100V,7,5X4.05.0MM					
C419	2201-000984	C-CERAMIC,DISC:680PF,10%,2KV,Y5P,TP,11X					
△ IC901	AA13-30019P	IC-MCU:SAA5291PS-098,8BIT,SDIP,175EE					
LD901	AA96-30001B	ASSY-LED,GUIDE,-,AA61-50055A,DL-G5RGA,-					
ASSY-CRT							
△	AA03-10030R	CRT-COLOR,-,A34JLL80X23,+400MG,14,90DEG					
ASSY-SPEAKER							
	AA39-20501A	LEAD-CONNECTOR,ASSY,-,67096-003,REC,3(2)					
	3001-000275	SPEAKER:2.5W,16OHM,90DB,105H					
ASSY-ACCESSORY							
	AA26-90001C	TRANS-MATCHING,-,300OHM/75OHM,PAL,40-890					
	AA42-10001D	ANT-ROD:DP,4S,620MM,SUS,U/L/CS					
		BUYER : BOLI (BG) ; ONLY					
	HA68-100046	MANUAL-USERS,-,A/P 80(G),ENG,CB5073T5X					
	HA68-100064	MANUAL-USERS,-,A/P 80(G),RUS,CK5073T5X					
		BUYER : SEPOL ; ONLY					
	AA26-90001C	TRANS-MATCHING,-,300OHM/75OHM,PAL,40-890					
	HA68-100060	MANUAL-USERS,-,A/P 80(G),POL,CK5073T5X					

7-2 CK5373T5X (CK5073T5X AND CK5373T5X Dissimilar Parts)

Loc. No.	Code No.	Description ; Specification	Remark	Loc. No.	Code No.	Description ; Specification	Remark
ASSY-PCB,MAIN				ASSY-CRT			
		BUYER : SEKO				AA03-10031E CRT-COLOR:-,A51EERX131X,+400MG,21,90DEG	
*	HA94-100189	ASSY-PCB,MAIN:CK5373T5X/XEK,S15A				AA27-50005G DEFLECTION-YOKE:-,DST-21944(2),21/A51EE	
		BUYER : INTRADE					
*	HA94-100188	ASSY-PCB,MAIN:CK5373T5X/LIB,S15A					
		BUYER : SEH					
*	HA94-100131	ASSY-PCB,MAIN:CK5373T5X/XEH,S15A					
		BUYER : SEPOL					
*	HA94-100190	ASSY-PCB,MAIN:CK5373T5X/XEO,S15A					
C409	2306-000253	C-FILM,MPPF:7.2 NF 5% 1.6KV 28.5X18.5X20					
C410	2201-000406	C-CERAMIC,DISC:270PF,10%,2KV,Y5P,8X5.5TP					
C419	2201-000984	C-CERAMIC,DISC:680PF,10%,2KV,Y5P,TP,11X					
C801	2401-002213	C-AL:150UF,+30-10%,450V,-,25X35,10M					
CN802	AA27-20003Z	COIL-DEGAUSSING:-,21,13.5OHM,25T,L2380					
		BUYER : SEKO (ONLY) IC901					
△ IC901	AA13-30019HIC-MCU:SAA5291PS-097,8BIT,SDIP,175ER						
LW01	AA27-40001N	COIL-HORIZ-WIDTH:-,90/260UH,SB-5S620,P10					
R301	2004-000869	R-METAL:3KOHM,1%,1/8W,AA,TP,1.8X3.2MM					
R305	2001-001048	R-CARBON(S):1.2OHM,5%,1/2W,AB,TP,2.4X6.4					
TUBE	AA39-20567A	LEAD-CONNECTOR,ASSY:-,TUBE,7Δf,Δ,-.25mm,					
		SEPOL / ONLY (LD901)					
LD901	AA96-30001B	ASSY-LED,GUIDE:-,AA61-50055A,DL-G5RGA,-					



7-3 CK5073T5X Parts List

Loc. No.	Code No.	Description ; Specification	Remark	Loc. No.	Code No.	Description ; Specification	Remark
ASSY-PCB MAIN							
		BUYER : SEH / SEKO					
*	HA94-100266	ASSY-PCB MAIN:CK5073T5X/XEH,S15A					
		BUYER : BOLI (BG)					
*	HA94-100128	ASSY-PCB,MAIN:CK5073T5X/BOB,S15A					
		BUYER : INTRADE					
*	HA94-100265	ASSY-PCB,MAIN:CK5073T5X/LIB,S15A					
		BUYER : SEPOL					
*	HA94-100268	ASSY-PCB,MAIN:CK5073T5X/XEO,S15A					
C101	2401-000939	C-AL:22UF,20%,25V,GP,TP,5X11MM,5		C226	2301-000224	C-FILM,PEF:22NF,5%,50V,7.4X3.9X13MM,5MM,T	
C102	2401-001082	C-AL:330NF,20%,50V,GP,5X11MM,5MM,TP		C228	2201-000247	C-CERAMIC,DISC:15PF,5%,50V,CH,TP,5X3.5	
C103	2401-001363	C-AL:470UF,20%,16V,GP,TP,10X12.5MM,		C230	2401-001495	C-AL:47UF,20%,16V,GP,5X11MM,5MM,TP	
C201	2306-000122	C-FILM,MPPF:100NF,5%,50V,7.3X4.0X5.0MM,5MM		C231	2401-000416	C-AL:10UF,20%,16V,GP,TP,5X11,5MM	
C202	2401-001840	C-AL:100UF,20%,16V,GP,TP,8X11.5MM,5		C232	2401-001840	C-AL:100UF,20%,16V,GP,TP,8X11.5MM,5	
C203	2401-000660	C-AL:2.2 UF 20% 50V GP 5X11.5 TP		C238	2401-001495	C-AL:47UF,20%,16V,GP,5X11MM,5MM,TP	
C204	2401-000603	C-AL:1UF,20%,50V,GP,5X11MM,5MM,TP		C239	2305-000288	C-FILM,MPEF:220NF,5%,50V,7.3X4.8X5.5MM,5MM	
C205	2305-000411	C-FILM,MPEF:470NF,5%,50V,7.3X4.8X5.5MM,5MM		C240	2305-000665	C-FILM,MPEF:100NF,5%,63V,7.5X4.0X5.0MM,5MM	
C206	2305-000411	C-FILM,MPEF:470NF,5%,50V,7.3X4.8X5.5MM,5MM		C247	2202-002037	C-CERAMIC,MLC-AXIAL:100NF,80-20%,50V,Y5P,TP,2.2X3	
C207	2305-000196	C-FILM,MPEF:150NF,5%,63V,TP,-,5MM		C248	2309-000138	C-FILM,PE-PF:100NF,5%,50V,16X7MM,7.5MM,TP	
C208	2401-000027	C-AL:4.7UF,20%,50V,GP,TP,5X11MM,5MM		C249	2401-000603	C-AL:1UF,20%,50V,GP,5X11MM,5MM,TP	
C209	2202-000794	C-CERAMIC,MLC-AXIAL:18PF,5%,50V,CH,TP,3.5X19MM		C250	2301-000224	C-FILM,PEF:22NF,5%,50V,7.4X3.9X13MM,5MM,T	
C210	2301-000264	C-FILM,PEF:4.7NF,5%,50V,6.5X5.5X3.0X5.5MM		C251	2301-000204	C-FILM,PEF:2.7NF,5%,50V,7.4X3.9X13MM,5MM,	
C211	2305-000665	C-FILM,MPEF:100NF,5%,63V,7.5X4.0X5.0MM,5MM		C252	2301-000192	C-FILM,PEF:1NF,5%,50V,5.3X10MM,5MM,TP	
C212	2202-000796	C-CERAMIC,MLC-AXIAL:1NF,10%,50V,Y5P,TP,5.5X19,-		C253	2306-000122	C-FILM,MPPF:100NF,5%,50V,7.3X4.0X5.0MM,5MM	
C213	2201-000273	C-CERAMIC,DISC:18PF,5%,50V,NP0,5.0*3.0,2.5MM,		C254	2306-000122	C-FILM,MPPF:100NF,5%,50V,7.3X4.0X5.0MM,5MM	
C214	2301-000285	C-FILM,PEF:47NF,5%,50V,7.5X4.0X6.5,5MM,TP		C255	2306-000122	C-FILM,MPPF:100NF,5%,50V,7.3X4.0X5.0MM,5MM	
C215	2301-000380	C-FILM,PEF:10NF,5%,50V,6.5X3MM,5MM,TP		C301	2202-000253	C-CERAMIC,MLC-AXIAL:4.7NF,20%,16V,Y5R,TP,1.9X3.5	
C216	2305-000288	C-FILM,MPEF:220NF,5%,50V,7.3X4.8X5.5MM,5MM		C302	2202-000253	C-CERAMIC,MLC-AXIAL:4.7NF,20%,16V,Y5R,TP,1.9X3.5	
C217	2301-000192	C-FILM,PEF:1NF,5%,50V,5.3X10MM,5MM,TP		C303	2401-003028	C-AL:100UF,20%,25V,WT,TP,6.3X11.5MM	
C219	2401-000355	C-FILM,MPPF:7.4NF,5%,100V,TP,-,5MM		C304	2401-000903	C-AL:22UF,20%,160V,WT,TP,10X20MM,5M	
C221	2202-000121	C-CERAMIC,MLC-AXIAL:100PF,10%,50V,Y5P,1.9X3.5MM,-		C305	2305-000178	C-FILM,MPEF:10NF,5%,100V,-,5MM,TP	
C222	2401-000440	C-AL:10UF,20%,25V,GP,5X11MM,5MM,TP		C306	2305-000285	C-FILM,MPEF:220NF,5%,100V,-5MM,TP	
C224	2202-000295	C-CERAMIC,MLC-AXIAL:68PF,5%,50V,SL,3.5X19,-,TP				BUYER : BOLI (BG) ; ONLY (C306)	
				C306	2305-000149	C-FILM,MPEF:100NF,5% 100V,7.5X4.05.0MM	
				C307	2305-000149	C-FILM,MPEF:100NF,5% 100V,7.5X4.05.0MM	
				C308	2305-000450	C-FILM,MPEF:56NF,5%,100V,TP,-,5MM	
				C401	2301-000380	C-FILM,PEF:10NF,5%,50V,6.5X3MM,5MM,TP	
				C402	2201-000599	C-CERAMIC,DISC:560PF 10% 500V Y5P 6X4MM,5MM	
				C403	2201-000556	C-CERAMIC,DISC:470PF,10%,500V,Y5P,6X3.5MM,5MM	
				C404	2401-001998	C-AL:1000UF,20%,25V,GP,TP,10X20,5MM	
				C408	2401-001530	C-AL:47UF,20%,25V,GP,5X11MM,5MM,TP	
				C409	2306-000355	C-FILM,MPPF:7.4NF,5%,1.6KV,28.5X18.5X12.20	
				C410	2201-000983	C-CERAMIC,DISC:1NF,10%,2KV,Y5P,8X5.5,TP	
				C411	2401-000927	C-AL:22UF,20%,250V,GP,13X20MM,5MM,T	

Loc. No.	Code No.	Description ; Specification	Remark	Loc. No.	Code No.	Description ; Specification	Remark
C413	2305-000382	C-FILM,MPEF;4.7NF,5%,400V,TP,-,5MM		D210	0401-000005	DIODE-SWITCHING;1N4148,75V,300MA,DO-35,TP	
C414	2301-001065	C-FILM,MPPF;4.7NF,5%,630V,TP,19X15.5X7.75		D211	0401-000005	DIODE-SWITCHING;1N4148,75V,300MA,DO-35,TP	
C415	2401-000560	C-AL:1UF,20%,160V,GP,TP,6.3*11,5MM		D213	0401-000005	DIODE-SWITCHING;1N4148,75V,300MA,DO-35,TP	
C416	2306-000204	C-FILM,MPPF;430NF,5%,400V,-,20MM,TP		D401	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41	
C417	2201-000556	C-CERAMIC,DISC;470PF,10%,500V,Y5P,6X3.5MM,5MM		D402	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41	
C418	2401-000384	C-AL:10UF,20%,100V,GP,TP,6.3X11,5MM		D403	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,TP	
C419	2201-000984	C-CERAMIC,DISC;680PF,10%,2KV,Y5P,TP,11X6.7.5		D404	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A	
C502	2301-000213	C-FILM,PEF;220NF,5%,250V,21.5X11MM,17.5MM		D405	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,TP	
C503	2201-002063	C-CERAMIC,DISC;10NF,-20,+80%,3KV,Y5V,TP,16X5,		D406	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,TP	
C504	2401-001232	C-AL:4.7UF,20%,250V,GP,10X12.5MM,5M		D501	0402-000216	DIODE-RECTIFIER;ERC24-06,600V,1.0A,DO-204	
C506	2401-000430	C-AL:10UF,20%,250V,GP,TP,10X16MM,5M		D502	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,TP	
C601	2202-000210	C-CERAMIC,MLC-AXIAL;270PF,10%,50V,Y5P,-,7.5MM,TP		D503	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,TP	
C602	2401-000939	C-AL:22UF,20%,25V,GP,TP,5X11MM,5		D504	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,TP	
C603	2301-000264	C-FILM,PEF;4.7NF,5%,50V,6.5X5.5X3.0X5,5MM		D701	0401-000005	DIODE-SWITCHING;1N4148,75V,300MA,DO-35,TP	
C604	2401-001323	C-AL:470NF,20%,50V,BP,6X11MM,5MM,TP		D800	1405-000152	VARIATOR;560V,2500A,14X8,5MM,TP	
C610	2401-001998	C-AL:1000UF,20%,25V,GP,TP,10X20,5MM		D801	0402-000102	DIODE-BRIDGE;D2SB60,600V,1.5A,-	
C613	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,5.5X19,-		D802	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5A,-	
C614	2202-000210	C-CERAMIC,MLC-AXIAL;270PF,10%,50V,Y5P,-,7.5MM,TP		D804	0402-000213	DIODE-RECTIFIER;ERB12-06,600V,1A	
C702	2202-000263	C-CERAMIC,MLC-AXIAL;470PF,10%,50V,Y5P,TP,3.5X19,-		D805	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A	
C704	2202-000121	C-CERAMIC,MLC-AXIAL;100PF,10%,50V,Y5P,1.9X3.5MM,-		D809	0401-000005	DIODE-SWITCHING;1N4148,75V,300MA,DO-35,TP	
C705	2401-001264	C-AL:4.7UF,20%,50V,BP,6X11MM,5MM,TP		D810	0402-000216	DIODE-RECTIFIER;ERC24-06,600V,1.0A,DO-204	
C706	2401-001264	C-AL:4.7UF,20%,50V,BP,6X11MM,5MM,TP		D901	0401-000005	DIODE-SWITCHING;1N4148,75V,300MA,DO-35,TP	
C800	2306-000320	C-FILM,MPPF;470NF,5%,50V,7.4X3.9X13MM,5MM,T		D903	0401-000005	DIODE-SWITCHING;1N4148,75V,300MA,DO-35,TP	
C801	2401-000534	C-AL:150UF,20%,400V,GP,25X30,10,ST		D905	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
C802	2401-002284	C-AL:33UF,20%,50V,GP,TP,5X11MM,5MM		D910	0401-000005	DIODE-SWITCHING;1N4148,75V,300MA,DO-35,TP	
C803	2301-000224	C-FILM,PEF;22NF,5%,50V,7.4X3.9X13MM,5MM,T		D911	0401-000005	DIODE-SWITCHING;1N4148,75V,300MA,DO-35,TP	
C804	2301-000310	C-FILM,PEF;68NF,5%,50V,8.0X8.5X4.0X5,5MM,		DA01	0401-000005	DIODE-SWITCHING;1N4148,75V,300MA,DO-35,TP	
C805	2303-000163	C-FILM,PPF;2.2NF,5%,800V,-,TP		DZ201	0403-000295	DIODE-ZENER;MTZ5.1B 5.1V 4.94 5.20V 500MW	
C806	2201-000446	C-CERAMIC,DISC;3.3NF,20%,400V,Y5U,TP,18X8,10M		DZ202	0403-000551	DIODE-ZENER;MTZ3.9B,3.9V,3.89-4.16V,500MW,	
C807	2201-000991	C-CERAMIC,DISC;560PF,10%,2KV,Y5P,8X5.5,TP		DZ203	0403-000563	DIODE-ZENER;MTZ9.1B,9.1V,8.57-9.01V,500MW,	
C808	2401-000262	C-AL:100UF,20%,160V,GP,TP,13X20MM,5MM,		DZ204	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
C809	2401-002290	C-AL:47UF,20%,160V,GP,TP,13X20MM,5M		DZ205	0403-000563	DIODE-ZENER;MTZ9.1B,9.1V,8.57-9.01V,500MW,	
C810	2201-000991	C-CERAMIC,DISC;560PF,10%,2KV,Y5P,8X5.5,TP		DZ208	0403-000563	DIODE-ZENER;MTZ9.1B,9.1V,8.57-9.01V,500MW,	
C811	2401-003141	C-AL:2200UF,20%,25V,WT,TP,13X25,5MM		DZ301	0403-000660	DIODE-ZENER;MTZ22A 22V 20 15-21 2V 500MW	
C814	2301-000192	C-FILM,PEF;1NF,5%,50V,5.3X10MM,5MM,TP		DZ302	0403-001039	DIODE-ZENER;MA2560,56V,52-60,1W,DO-4	
C815	2401-000808	C-AL:220UF,20%,16V,GP,8X11MM,5MM,TP		DZ401	0403-000296	DIODE-ZENER;MTZ 5.6B	
C816	2401-000603	C-AL:1UF,20%,50V,GP,5X11MM,5MM,TP		DZ501	0403-000563	DIODE-ZENER;MTZ9.1B,9.1V,8.57-9.01V,500MW,	
C818	2401-001495	C-AL:47UF,20%,16V,GP,5X11MM,5MM,TP		DZ502	0403-000563	DIODE-ZENER;MTZ9.1B,9.1V,8.57-9.01V,500MW,	
C819	2401-001840	C-AL:100UF,20%,16V,GP,TP,8X11.5MM,5		DZ503	0403-000563	DIODE-ZENER;MTZ9.1B,9.1V,8.57-9.01V,500MW,	
C901	2401-001840	C-AL:100UF,20%,16V,GP,TP,8X11.5MM,5		DZ504	0403-000563	DIODE-ZENER;MTZ9.1B,9.1V,8.57-9.01V,500MW,	
C902	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,5.5X19,-		DZ701	0403-000563	DIODE-ZENER;MTZ9.1B,9.1V,8.57-9.01V,500MW,	
C904	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,5.5X19,-		DZ702	0403-000563	DIODE-ZENER;MTZ9.1B,9.1V,8.57-9.01V,500MW,	
C905	2401-001333	C-AL:0.47UF,20% 50V,GP 5X11,5 TP		DZ703	0403-000563	DIODE-ZENER;MTZ9.1B,9.1V,8.57-9.01V,500MW,	
C907	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,8X5MM,5M		DZ704	0403-000563	DIODE-ZENER;MTZ9.1B,9.1V,8.57-9.01V,500MW,	
C908	2201-000980	C-CERAMIC,DISC;30PF,5%,50V,NPO,5.0X3.0,5MM		DZ705	0403-000563	DIODE-ZENER;MTZ9.1B,9.1V,8.57-9.01V,500MW,	
C909	2201-000980	C-CERAMIC,DISC;30PF,5%,50V,NPO,5.0X3.0,5MM		DZ802	0403-000297	DIODE-ZENER;MTZ6.2B,6.2V,5.96-6.27V,500MW,	
C910	2306-000122	C-FILM,MPPF;100NF,5%,50V,7.3X4.0X5.0MM,5MM		DZ803	1203-001217	IC-POSI.ADJUST REG;431,TO-92,3P,4.58MIL,PLASTIC,2	
C911	2401-002235	C-AL:10UF,20%,16V,GP,TP,5X11MM,5MM		DZ804	2001-001170	R-CARBON(S);6.8OHM,5%,1/2W,AA,TP,2.4X6.4MM	
C912	2201-000234	C-CERAMIC,DISC;150PF,5%,50V,NPO,10X3.5MM,5MM,		DZ806	0403-000295	DIODE-ZENER;MTZ5.1B 5.1V 4.94 5.20V 500MW	
C913	2301-000108	C-FILM,PEF;1.5NF,5%,50V,6.5X3.0X5.5MM,5MM		DZ808	0403-000300	DIODE-ZENER;MTZ8.2B,7.78-8.19V,500MW,DO-34	
C914	2306-000122	C-FILM,MPPF;100NF,5%,50V,7.3X4.0X5.0MM,5MM		DZ809	0403-000296	DIODE-ZENER;MTZ 5.6B	
C915	2306-000122	C-FILM,MPPF;100NF,5%,50V,7.3X4.0X5.0MM,5MM		DZ901	0403-000563	DIODE-ZENER;MTZ9.1B,9.1V,8.57-9.01V,500MW,	
C916	2301-000264	C-FILM,PEF;4.7NF,5%,50V,6.5X5.5X3.0X5,5MM		DZ902	0403-000296	DIODE-ZENER;MTZ 5.6B	
C917	2202-002037	C-CERAMIC,MLC-AXIAL;100NF,80-20%,50V,Y5P,TP,2.2X3		DZ903	1203-000451	IC-VOLTAGE REGULATOR;33 TO 92.3P PLASTIC-31/35	
C920	2401-000480	C-AL:10UF,20%,50V,GP,5X11MM,5MM,TP		DZ905	0403-000296	DIODE-ZENER;MTZ 5.6B	
C923	2202-002037	C-CERAMIC,MLC-AXIAL;100NF,80-20%,50V,Y5P,TP,2.2X3		DZ907	0403-000296	DIODE-ZENER;MTZ 5.6B	
C924	2202-002037	C-CERAMIC,MLC-AXIAL;100NF,80-20%,50V,Y5P,TP,2.2X3		DZ909	0403-000551	DIODE-ZENER;MTZ3.9B,3.9V,3.89-4.16V,500MW,	
C926	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50V,Y5P,TP,5.5X19,-		△ F801	3601-000261	FUSE-FERRULE;3.15A 250V	
C928	2305-000412	C-FILM,MPEF;470NF,5%,63V,-,5MM,TP		F801A	3602-000114	FUSE-HOLDER;-,-,30MOHM	
CA01	2401-001264	C-AL:4.7UF,20%,50V,BP,6X11MM,5MM,TP		F801B	3602-000114	FUSE-HOLDER;-,-,30MOHM	
CN501	AA39-20109B	LEAD-CONNECTOR,ASSY;-YBNH025-08,S,8P,500,1007#26		△ F802	3601-001086	FUSE-FERRULE;125V,5A,QUICK,CERAMIC	
CN601	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,STRAIGHT,SN		△ IC201	1204-001386	IC-VIDEO SYSTEM;TDA8842,DIP,56P,300MIL,PLASTIC	
CN703	3711-002648	CONNECTOR-HEADER;BOX,9P,1R,2.5MM,STRAIGHT		△ IC301	1204-000441	IC-IF CIRCUIT;TDA8356,SIP,9P,-,PLASTIC,40V	
CN802	AA27-20003Y	COIL-DEGAUSSING;-20,15.2OHM,28T,L2170.E		△ IC501	1201-001159	IC-VIDEO AMP;6107,ZIP,9P,300MIL,SINGLE,-,PL	
CT01	2202-002037	C-CERAMIC,MLC-AXIAL;100NF,80-20%,50V,Y5P,TP,2.2X3		△ IC601	1201-001147	IC-AUDIO AMP;7056,SIP,9P,-,SINGLE,41.5DB,P	
CT02	2202-002037	C-CERAMIC,MLC-AXIAL;100NF,80-20%,50V,Y5P,TP,2.2X3		△ IC801	1203-001494	IC-PWM CONTROLLER;3S0680RF,T03PF-5L,5,210,PLASTI	
CT03	2401-001495	C-AL:47UF,20%,16V,GP,5X11MM,5MM,TP		△ IC802	1203-000644	IC-POSI.FIXED REG;7630,SIP,10P,-,PLASTIC,5.1/8V,	
CT04	2202-002037	C-CERAMIC,MLC-AXIAL;100NF,80-20%,50V,Y5P,TP,2.2X3		△ IC901	AA13-30019P	IC-MCU;SAA5291PS-098,8BIT,SDIP,175EE	
CT05	2202-000154	C-CERAMIC,MLC-AXIAL;150PF,10%,50V,Y5P,TP				BUYER : BOLI (IC901)	
CT06	2202-002037	C-CERAMIC,MLC-AXIAL;100NF,80-20%,50V,Y5P,TP,2.2X3		△ IC901	AA13-30019H	IC-MCU;SAA5291PS-097,8BIT,SDIP,175ER	
CT07	2401-001495	C-AL:47UF,20%,16V,GP,5X11MM,5MM,TP		△ IC902	1103-001105	IC-EEPROM;24C040,512X8BIT,DIP,8P,300MIL,	
CW901	2503-000156	C-NETWORK;100PFX4,20%50V		J149	2701-000114	INDUCTOR-AXIAL;10UH,10%,2.5X3.4MM	
D201	0401-000005	DIODE-SWITCHING;1N4148,75V,300MA,DO-35,TP		J175	2001-000857	R-CARBON;560OHM 5% 1/8W AA TP 1.8X3.2MM	
D202	0401-000005	DIODE-SWITCHING;1N4148,75V,300MA,DO-35,TP		J176	2001-000857	R-CARBON;560OHM 5% 1/8W AA TP 1.8X3.2MM	
D205	0401-000005	DIODE-SWITCHING;1N4148,75V,300MA,DO-35,TP		J178	2001-000857	R-CARBON;560OHM 5% 1/8W AA TP 1.8X3.2MM	
D208	2001-000633	R-CARBON;30KOHM,5%,1/8W,AA,TP,1.8X3.2MM		J185	2701-000114	INDUCTOR-AXIAL;10UH,10%,2.5X3.4MM	
D209	0401-000005	DIODE-SWITCHING;1N4148,75V,300MA,DO-35,TP		JS701	3722-000183	JACK-RCA;21P,4MM,-,SN	

Electric Parts List

Loc. No.	Code No.	Description ; Specification	Remark	Loc. No.	Code No.	Description ; Specification	Remark
L102	2701-000212	INDUCTOR-AXIAL:68UH,10%,2.8X7MM		R229	2001-000890	R-CARBON:6.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
L103	2701-000114	INDUCTOR-AXIAL:10UH,10%,2.5X3.4MM		R230	2001-000793	R-CARBON:470HM,5%,1/8W,AA,TP,1.8X3.2MM	
L202	2701-000168	INDUCTOR-AXIAL:3.3 UH 5% 2.5X3.4 MM		R231	2001-000563	R-CARBON:27 KOHM 5% 1/8W AATP 1.8X3.2MM	
L206	2701-000114	INDUCTOR-AXIAL:10UH,10%,2.5X3.4MM		R232	2001-000356	R-CARBON:150KOHM,5%,1/8W,AA,TP,1.8X3.2M	
L301	2701-000114	INDUCTOR-AXIAL:10UH,10%,2.5X3.4MM		R234	2001-000281	R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
L302	2701-000114	INDUCTOR-AXIAL:10UH,10%,2.5X3.4MM		R236	2003-000634	R-METAL OXIDE(S):3.9KOHM,5%,1W,AA,TP,3.3X9MM	
L304	2701-000159	INDUCTOR-AXIAL:22UH,10%,4.2X9.8MM		R237	2001-000793	R-CARBON:470HM,5%,1/8W,AA,TP,1.8X3.2MM	
L305	2701-000116	INDUCTOR-AXIAL:10 UH 10% 4.2X9.8MM		R238	2001-000739	R-CARBON:4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
L306	2701-000115	INDUCTOR-AXIAL:10UH,10%,2.8X7MM		R239	2001-000739	R-CARBON:4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
L401	AA27-30001B	COIL-LINEARITY:-,195UH,QIC1010,PIO.4,4.5X21.5		R240	2001-000832	R-CARBON:5100HM,5%,1/8W,AA,TP,1.8X2.3M	
L402	2901-000297	FILTER-EMI ON BOARD:-,3A,-,3.5X5,TP-		R241	2001-000734	R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
L601	2701-000146	INDUCTOR-AXIAL:2.2UH,10%,2.5X3.4MM		R242	2001-000734	R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
L702	2701-000184	INDUCTOR-AXIAL:4.7UH,		R250	2001-000429	R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
L703	2701-000184	INDUCTOR-AXIAL:4.7UH,		R251	2001-000429	R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
L704	2701-000184	INDUCTOR-AXIAL:4.7UH,		R252	2004-001914	R-METAL:39KOHM,2%,1/8W,AA,TP,1.8X3.5MM	
L706	2701-000184	INDUCTOR-AXIAL:4.7UH,		R262	2001-000429	R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
L801	AA29-30001G	FILTER-LINE:-,27MH,-,-,-		R301	2004-001983	R-METAL:2.49KOHM,1%,1/2W,AA,TP,2.4X6.4	
L804	3301-000287	CORE-FERRITE BEAD:AA,3.5X1.0X6.0MM,1500,2400G		R302	2008-001033	R-FUSIBLE:10 OHM 5% 2W AF TP 10X3.9MM	
L805	2901-000297	FILTER-EMI ON BOARD:-,3A,-,3.5X5,TP-		R303	2001-000273	R-CARBON:100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
L807	2901-000297	FILTER-EMI ON BOARD:-,3A,-,3.5X5,TP-		R305	2004-001370	R-METAL(S):1.30HM,1%,1/2W,AA,TP,2.4X6.4MM	
L809	2701-001032	INDUCTOR-AXIAL:100UH,10%,5X14MM		R306	2008-000254	R-FUSIBLE(S):0.68 OHM 5% 2T AF TP 3.9X10MM	
L810	2701-001032	INDUCTOR-AXIAL:100UH,10%,5X14MM		R307	2003-001026	R-METAL OXIDE(S):1800HM,5%,2W,AF,TP,3.9X	
L902	2701-000189	INDUCTOR-AXIAL:470NH,10%,2.5X3.4MM		R402	2003-000664	R-METAL OXIDE(S):330HM,5%,2W,AF,TP,4X12MM	
LD901	AA96-30007A	ASSY-LED,GUIDE:-,AA61-50055A,DL-G7GA,GRE BUYER : SEPOL / ONLY		R403	2001-001114	R-CARBON(S):2700HM,5%,1/2W,AA,TP,2.4X6.4MM	
LD901	AA96-30001B	ASSY-LED,GUIDE:-,AA61-50055A,DL-G5RGA,-		R404	2008-000294	R-FUSIBLE(S):33ohm,5%,2W,AF,TO,3.9X10MM	
LT01	2901-000297	FILTER-EMI ON BOARD:-,3A,-,3.5X5,TP-		R405	2001-001410	R-CARBON(S):43 OHM 5%1/2W,AA,TP,2.4X6.4MM	
LT02	2901-000297	FILTER-EMI ON BOARD:-,3A,-,3.5X5,TP-		R406	2001-000037	R-CARBON(S):330OHM,5%,1/2W,AA,TP,2.4X6.4MM	
LT03	2701-000114	INDUCTOR-AXIAL:10UH,10%,2.5X3.4MM		R407	2001-001037	R-CARBON(S):0.39OHM,5%,1/2W,AA,TP,2.4X6.4M	
NT801	1404-000187	THERMISTOR-NTC:4.7 OHM,15% 2800K,27,2MMW/C,TP		R408	2001-000022	R-CARBON(S):330HM,5%,1/2W,AA,TP,2.4X6.4MM	
P801	1404-001048	THERMISTOR-PTC:70HM,30%,200/220V,270V,19A,-,B		R409	2008-000204	R-FUSIBLE(S):0.22OHM,5%,1/2W,AF,TP,2.5X6.5	
PC801	0604-001038	PHOTO-COUPLER:TR,130-260%,200MW,DIP-4,ST		R412	2003-000664	R-METAL OXIDE(S):330HM,5%,2W,AF,TP,4X12MM	
Q201	0501-002183	TR-SMALL SIGNAL:KTC9014,NPN,625MW,TO-92,TP,100		R413	2003-000784	R-METAL OXIDE(S):7.5KOHM,5%,2W,AD,TP,4X12MM	
Q202	0501-002183	TR-SMALL SIGNAL:KTC9014,NPN,625MW,TO-92,TP,100		R414	2003-000540	R-METAL OXIDE(S):1KOHM,5%,2W,AD,TP,4X12MM	
Q204	0501-002183	TR-SMALL SIGNAL:KTC9014,NPN,625MW,TO-92,TP,100		R415	2008-000206	R-FUSIBLE(S):10HM,5%,1/2W,AF,TP,2.5X6.5MM	
Q401	0502-001115	TR-POWER:KSC5386,NPN,50W,TO-3PF,ST,8-		R416	2008-000277	R-FUSIBLE:680HM,5%,1/2W,AA,TP,4.7X11MM	
Q402	0501-000369	TR-SMALL SIGNAL:KSC2331-Y NPN 80V 60V 700MA		R417	2008-000265	R-FUSIBLE(S):10HM,5%,2W,AA,TP,3.9X10MM	
Q701	0501-002183	TR-SMALL SIGNAL:KTC9014,NPN,625MW,TO-92,TP,100		R420	2004-001377	R-METAL(S):120 KOHM 1/2W 1% AA TP 2.4X6.4M	
Q703	0501-000283	TR-SMALL SIGNAL:KSA539 PNP 60V 45V 200MA 40		R501H	2002-001008	R-COMPOSITION:1.8KOHM,5%,1/2W,AA,TP,3.7X9MM	
Q901	0501-002183	TR-SMALL SIGNAL:KTC9014,NPN,625MW,TO-92,TP,100		R502H	2002-001008	R-COMPOSITION:1.8KOHM,5%,1/2W,AA,TP,3.7X9MM	
Q902	0501-002183	TR-SMALL SIGNAL:KTC9014,NPN,625MW,TO-92,TP,100		R503	2002-001008	R-COMPOSITION:1.8KOHM,5%,1/2W,AA,TP,3.7X9MM	
Q903	0501-002183	TR-SMALL SIGNAL:KTC9014,NPN,625MW,TO-92,TP,100		R504	2001-001062	R-CARBON(S):10MOHM,5%,1/2W,AA,TP,2.4X6.4MM	
Q904	0504-000123	TR-DIGITAL:KSR1010,NPN,300MW,10K,TO-92,TP		R505	2008-001011	R-FUSIBLE(S):0.18OHM,10%,2W,AF,TP,3.9X10MM	
Q905	0504-000123	TR-DIGITAL:KSR1010,NPN,300MW,10K,TO-92,TP		R510	2001-000281	R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
Q906	0504-000123	TR-DIGITAL:KSR1010,NPN,300MW,10K,TO-92,TP		R511	2001-000281	R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
Q907	0504-000125	TR-DIGITAL:KSR1012,NPN,300MW,47K,TO-92,TP		R512	2001-000281	R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
Q908	0504-000123	TR-DIGITAL:KSR1010,NPN,300MW,10K,TO-92,TP		R603	2001-000241	R-CARBON:1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
QA01	0501-002183	TR-SMALL SIGNAL:KTC9014,NPN,625MW,TO-92,TP,100		R604	2001-000734	R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
QT02	0501-002183	TR-SMALL SIGNAL:KTC9014,NPN,625MW,TO-92,TP,100		R610	2001-000347	R-CARBON:13KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
QT03	0504-000123	TR-DIGITAL:KSR1010,NPN,300MW,10K,TO-92,TP		R611	2001-000577	R-CARBON:2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R200	2001-000780	R-CARBON:470 OHM 5% 1/8W AATP 1.8X3.2MM		R701	2001-000281	R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
R201	2001-000005	R-CARBON:390OHM,5%,1/8W,AA,TP,1.8X3.2MM		R702	2001-000969	R-CARBON:750HM,5%,1/8W,AA,TP,1.8X3.2MM	
R202	2001-000281	R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM		R703	2001-000429	R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R203	2001-000281	R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM		R705	2001-000003	R-CARBON:330 OHM 5% 1/8W AATP 1.8X3.2MM	
R204	2001-000281	R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM		R706	2001-000221	R-CARBON:1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R205	2001-000793	R-CARBON:470HM,5%,1/8W,AA,TP,1.8X3.2MM		R713	2001-000812	R-CARBON:5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R207	2001-000008	R-CARBON:15KOHM,5%,1/8W,AA,TP,1.8X3.2MM		R714	2001-000429	R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R208	2001-000005	R-CARBON:390OHM,5%,1/8W,AA,TP,1.8X3.2MM		R715	2001-000812	R-CARBON:5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R209	2701-000114	INDUCTOR-AXIAL:10UH,10%,2.5X3.4MM		R717	2001-000812	R-CARBON:5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R210	2001-000429	R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM		R801	2003-000994	R-METAL OXIDE(S):33KOHM,5%,2W,AF,TP,3.9X10MM	
R211	2001-000331	R-CARBON:12KOHM,5%,1/8W,AA,TP,1.8X3.2MM		R802	2003-000994	R-METAL OXIDE(S):33KOHM,5%,2W,AF,TP,3.9X10MM	
R212	2001-000281	R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM		R803	2001-001178	R-CARBON(S):680OHM,5%,1/2W,AA,TP,2.4X6.4MM	
R213	2001-000281	R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM		R805	2003-001023	R-METAL OXIDE(S):1200HM,5%,2W,AA,TP,3.9X10MM	
R214	2001-000281	R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM		R806	2002-001011	R-COMPOSITION:3.3MOHM,10%1/2W,AA,TP,3	
R215	2004-001995	R-METAL:9.1KOHM,5%,1/8W,AA,TP,1.8X3.2M		R807	2002-001011	R-COMPOSITION:3.3MOHM,10%1/2W,AA,TP,3	
R216	2001-000490	R-CARBON:2000HM,5%,1/8W,AA,TP,1.8X3.2MM		R808	2001-000022	R-CARBON(S):330HM,5%,1/2W,AA,TP,2.4X6.4MM	
R217	2001-000449	R-CARBON:2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M		R809	2001-000622	R-CARBON:300KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R218	2001-000591	R-CARBON:3.3 KOHM 5% 1/8W AATP1.8X3.2MM		R810	2003-000527	R-METAL OXIDE(S):18KOHM,5%,2W,AA,TP,4X12MM	
R219	2001-000008	R-CARBON:15KOHM,5%,1/8W,AA,TP,1.8X3.2MM		R812	2003-000455	R-METAL OXIDE(S):1000HM,5%,2W,AA,TP,4X12MM	
R220	2001-000221	R-CARBON:1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M		R814	2008-000267	R-FUSIBLE(S):2.4OHM,5%,2W,AA,TP,3.9X10MM	
R220	2001-000281	R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM		R815	2008-000267	R-FUSIBLE(S):2.4OHM,5%,2W,AA,TP,3.9X10MM	
R221	2001-000290	R-CARBON:10KOHM 5% 1/8W AATP 1.8X3.2 MM		R816	2004-004089	R-METAL:123KOHM,1%,1/2W,AA,TP,2.5X6.5M	
R223	2004-0011205	R-METAL:680HM,5%,1/8W,AA,TP,1.8X3.2MM		R817	2004-001983	R-METAL:2.49KOHM,1%,1/2W,AA,TP,2.4X6.4	
R224	2001-000563	R-CARBON:27 KOHM 5% 1/8W AATP 1.8X3.2MM		R818	2004-001371	R-METAL(S):1.5KOHM,1%,1/2W,AA,TP,2.4X6.4M	
R225	2001-000554	R-CARBON:2700HM,5%,1/8W,AA,TP,1.8X3.2MM		R819	2004-001390	R-METAL(S):1KOHM,2%,1/2W,AA,TP,2.4X6.4MM	
R226	2001-000281	R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM		R820	2008-001062	R-FUSIBLE:39 OHM,2W	
R227	2004-001234	R-METAL:75KOHM,5%,1/8W,AA,TP,1.8X3.2MM		R822	2001-001150	R-CARBON(C):470KOHM,5%,1/2W,AA,TP,2.4X6.4M	
				R823	2001-001150	R-CARBON(C):470KOHM,5%,1/2W,AA,TP,2.4X6.4M	

Loc. No.	Code No.	Description ; Specification	Remark	Loc. No.	Code No.	Description ; Specification	Remark
R825	2003-001040	R-METAL OXIDE(S):47KOHM,5%,2W,AF,TP,3.9X10MM		Z202	2903-000181	FILTER-CERAMIC;BP 5.5MHZ	
R901	2001-000832	R-CARBON:510OHM,5%,1/8W,AA,TP,1.8X3.2MM		Z204	2903-000184	FILTER-CERAMIC;BP,5.5MHZ	
R902	2001-000734	R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM		Z205	2903-000202	FILTER-CERAMIC;BP,6.5MHZ	
R903	2001-000281	R-CARBON:100OHM,5%,1/8W,AA,TP,1.8X3.2MM		Z206	2903-000184	FILTER-CERAMIC;BP,5.5MHZ	
R904	2001-000281	R-CARBON:100OHM,5%,1/8W,AA,TP,1.8X3.2MM		Z210	2903-000200	FILTER-CERAMIC;BP,6.5MHZ	
R905	2001-000241	R-CARBON:1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM					
R906	2001-000290	R-CARBON:10KOHM 5% 1/8W AATP 1.8X3.2 MM					
R907	2001-000449	R-CARBON:2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM					
R908	2001-000449	R-CARBON:2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM					
R909	2001-000591	R-CARBON:3.3 KOHM 5% 1/8W AATP1.8X3.2MM		*	HA95-900003	ASSY-PCB,A/V FRONT;73,SCT13B,S15A	
R912	2004-001193	R-METAL:680OHM,5%,1/8W,AA,TP,1.8X3.2MM					
R919	2001-000290	R-CARBON:10KOHM 5% 1/8W AATP 1.8X3.2 MM		L-CON	AA39-20112E	LEAD-CONNECTOR,ASSY;-YBNH025-09,67096-009,9P,300	
R921	2001-001062	R-CARBON(S):10MOHM,5%,1/2W,AA,TP,2.4X6.4MM		J-PHONE	3722-000143	JACK-PHONE:1P,3.4NM,MBAG,BLACK	
R922	2001-000281	R-CARBON:100OHM,5%,1/8W,AA,TP,1.8X3.2MM		J-RCA	3722-000507	JACK-RCA:2P 3.6MM;-AG	
R923	2001-000281	R-CARBON:100OHM,5%,1/8W,AA,TP,1.8X3.2MM		QE01	0501-000283	TR-SMALL SIGNAL:KSA539 PNP 60V 45V 200MA 40	
R924	2001-000449	R-CARBON:2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM		RE05	2001-000009	R-CARBON:20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R925	2001-000449	R-CARBON:2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM		RE03	2001-000010	R-CARBON(S):68KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R926	2001-000290	R-CARBON:10KOHM 5% 1/8W AATP 1.8X3.2 MM		RE04	2001-000429	R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R927	2001-000290	R-CARBON:10KOHM 5% 1/8W AATP 1.8X3.2 MM		RE01	2001-001153	R-CARBON(S):47OHM,5%,1/2W,AA,TP,2.4X6.4MM	
R928	2001-000666	R-CARBON(S):10 KOHM 5% 1/2W AATP 2.4X6.4MM		RE02	2001-001153	R-CARBON(S):47OHM,5%,1/2W,AA,TP,2.4X6.4MM	
R929	2004-000253	R-METAL:11KOHM,1%,1/8W,AA,TP,1.8X3.2MM		CE07	2202-000222	C-CERAMIC,MLC-AXIAL:3.3NF,20%,16V,Y5P,-,7.5MM,TP	
R930	2004-000218	R-METAL:10KOHM,1%,1/8W,AA,TP,1.8X3.2MM		CE06	2202-000862	C-CERAMIC,MLC-AXIAL:390PF,10%50V,Y5P,3.5X1.9TP	
R931	2004-000218	R-METAL:10KOHM,1%,1/8W,AA,TP,1.8X3.2MM		CE03	2401-001264	C-AL:4.7UF,20%,50V,BP,6X11MM,5MM,TP	
R932	2001-000734	R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM		CE01	2401-001840	C-AL:100UF,20%,16V,GP,TP,8X11.5MM,5	
R933	2001-000786	R-CARBON:47 KOHM 5% 1.8W AATP 1.8X3.2MM		LE01	2701-000158	INDUCTOR-AXIAL:22 UH 10% 2.5X3.4MM	
R935	2001-000429	R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM					
R936	2001-000734	R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM					
R937	2001-000734	R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM					
R939	2001-000006	R-CARBON:2.4 KOHM 5% 1/8W AATP 1.8X3.2M		*	AA59-10101T	REMOCON;DR,TM59,-,-,-,-,-,AA59-10107C,	
R940	2001-000660	R-CARBON:33KOHM,5%,1/8W,AA,TP,1.8X3.2MM					
R944	2001-000006	R-CARBON:2.4 KOHM 5% 1/8W AATP 1.8X3.2M					
R946	2001-000429	R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM					
R947	2001-000429	R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM					
R951	2001-000734	R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM		SPK	3001-000003	SPEAKER:3W,160HM,88DB,180HZ	
R952	2001-000281	R-CARBON:100OHM,5%,1/8W,AA,TP,1.8X3.2MM		L-CON	AA39-20500C	LEAD-CONNECTOR,ASSY:67096-003,REC,3(2),600,1007#	
R954	2001-000006	R-CARBON:2.4 KOHM 5% 1/8W AATP 1.8X3.2M					
R956	2001-000429	R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM					
R958	2001-000780	R-CARBON:470 OHM 5% 1/8W AATP 1.8X3.2MM					
R959	2001-000800	R-CARBON:5.1 KOHM 5% 1/8W AATP 1.08X3.2					
R960	2001-000290	R-CARBON:10KOHM 5% 1/8W AATP 1.8X3.2 MM		△ P/CORD	AA96-20077B	ASSY-POWER,CORD:SCT11D	
R962	2001-000273	R-CARBON:100KOHM,5%,1/8W,AA,TP,1.8X3.2M					
RA01	2004-001193	R-METAL:680OHM,5%,1/8W,AA,TP,1.8X3.2MM					
RA02	2001-000241	R-CARBON:1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM		△ CRT	AA03-10031D	CRT-COLOR:-,A48ECR141X,+400MG,20,90DEG	
RA03	2001-000734	R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM		△ D-YOKE	AA27-50005H	DEFLECTION-YOKE:-,DSE-2093BL,20/A48ECR141X,ST	
RA04	2001-000734	R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM		S-DY	AA63-60028A	SPACER-DY:NEOPRENE,-,BLK,V0 W12,-,-	
RL901	AA59-60001U	MODULE-REMOCON:-,ORC-50VF,38KHZ,940NM,MESH,V,					
RT01	2001-000563	R-CARBON:27 KOHM 5% 1/8W AATP 1.8X3.2MM					
RT02	2001-000577	R-CARBON:2KOHM,5%,1/8W,AA,TP,1.8X3.2MM					
RT03	2001-000958	R-CARBON:750OHM,5%,1/8W,AA,TP,1.8X3.2MM					
RT03	2001-000252	R-CARBON:1.6KOHM,5%,1/8W,AA,TP,1.8X3.2M					
RT04	2008-001062	R-FUSIBLE:39 OHM,2W					
RT05	2001-000864	R-CARBON:56KOHM,5%,1/8W,AA,TP,1.8X3.2MM		M-USE	AA68-11262A	MANUAL-USERS:S15A,ENGLISH,TTX,B5,W/P 100(G)	
RT06	2001-000362	R-CARBON:150 OHM 5% 1/8W AATP 1.8X3.2MM					
RT07	2001-000429	R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM					
RT08	2001-000003	R-CARBON:330 OHM 5% 1/8W AATP 1.8X3.2MM					
RT09	2001-000734	R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M					
RT13	2001-000734	R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M					
RW701	2011-001133	R-NETWORK:33K/24K/75X3,1/8W					
RW702	2011-001098	R-NETWORK:75/75/1K,75OHM,5%,--,-,P					
RW901	2011-000531	R-NETWORK:4.7KOHM,5%,1/8W,A,SIP,8PTP					
RX801	2002-001011	R-COMPOSITION:3.3MOHM,10%1/2W,AA,TP,3					
SFN02	2904-001063	FILTER-SAW:K2971M					
SW801	3403-001020	SWITCH-PUSH:250V,5A,DPST,OFF ON-OFF					
SW901	3404-000244	SWITCH-TACT:15V,20MA,90-170GF,7.5X7MM,SPST					
SW902	3404-000244	SWITCH-TACT:15V,20MA,90-170GF,7.5X7MM,SPST					
SW903	3404-000244	SWITCH-TACT:15V,20MA,90-170GF,7.5X7MM,SPST					
SW904	3404-000244	SWITCH-TACT:15V,20MA,90-170GF,7.5X7MM,SPST					
SW905	3404-000244	SWITCH-TACT:15V,20MA,90-170GF,7.5X7MM,SPST					
△ T401	AA26-50001B	HORIZ,DRIVE:-,7.1MH,102UH,10-20UH,YL081,ST					
△ T444	AA26-30001Y	TRANS-FLYBACK:-,FSV-20A001,20,125V					
△ T801	AA26-200070	TRANS-SWITCHING:-,180-260V,125V/12.5V,EN,EER28					
△ TU01	AA40-10006Q	TUNER-V/S;TELE4-125A,PAL-B/G,TR,181CH					
△ V999	3704-001090	SOCKET-CRT:9P,15.24PI,26.SPI,SN,-					
X202	2801-000226	CRYSTAL-UNIT:3.579545MHZ,20PPM,28-AAM,15PF,					
X203	2801-000274	CRYSTA-UNIT:4.433618MHZ,30PPM,28AAM,20PF					
X901	2801-001476	CRYSTAL-UNIT:12 MHZ 50PPM 28-ABO S 30OHM					
Z201	2903-000199	FILTER-CERAMIC;BP,6.5MHZ					

ASSY-PCB,A/V FRONT

REMOCON

ASSY-SPEAKER

ASSY-POWER,CORD

ASSY-CRT

ASSY-ACCESSORY

7-4 CK3373Z5X (CK5073Z5X AND CK3373Z5X Dissimilar Parts)

Loc. No.	Code No.	Description ; Specification	Remark	Loc. No.	Code No.	Description ; Specification	Remark
ASSY-PCB,MAIN				ASSY-CRT			
		BUYER : ANA				AA03-10030R CRT-COLOR:-,A34JLL80X23,+400MG,14,90DEG	
*	HA94-100290	ASSY-PCB,MAIN:CK3373Z5X/ANA,S15A		△			
		BUYER : BOLI (BG)		ASSY-SPEAKER			
*	HA94-100125	ASSY-PCB,MAIN:CK3373Z5X/BOB,S15A				AA39-20501A LEAD-CONNECTOR,ASSY:-,67096-003,REC,3(2)	
		BUYER : SEH				3001-000275 SPEAKER:2.5W,16 OHM,90DB,105H	
*	HA94-100293	ASSY-PCB,MAIN:CK3373Z5X/XEH,S15A		ASSY-ACCESSORY			
		BUYER : SEPOL				BUYER : ANA (ONLY)	
*	HA94-100295	ASSY-PCB,MAIN:CK3373Z5X/XEO,S15A				AA26-90001C TRANS-MATCHING:-,300OHM/750HM,PAL,40-890	
C307	2305-000149	C-FILM,MPEF:100NF,5% 100V,7,5X4.05.0MM				AA42-10001D ANT-ROD:DP,4S,620MM,SUS,UL/CS	
C409	2303-001027	C-FILM,PPF:4.7NF,5%,1600V,31X16X9,20MM				HA68-100059 MANUAL-USERS:-,A/P 80(G),ROM,CK5073Z5X	
C410	2201-000406	C-CERAMIC,DISC:270PF,10%,2KV,Y5P,8X5.5TP				BUYER : BOLI (BG) ONLY	
C416	2306-001004	C-FILM,MPPF:300NF,5%,400V,TP,26X14X21MM,				AA68-11259A MANUAL-USERS:S15A,RUSSIAN,W/O TTX,B5,WP	
C419	2201-000984	C-CERAMIC,DISC:680PF,10%,2KV,Y5P,TP,11X				AA68-20014A MANUAL-SERVICE:-,A/P 100(G),-,SPAIN,-12	
C801	2401-002213	C-AL:150UF,+30-10%,450V,-,25X35,10M					
CN501	AA39-20109A	LEAD-CONNECTOR,ASSY:-,YBNH025-08,S,8P,40					
CN802	AA27-20003U	COIL-DEGAUSSING:-,14,16.4OHM,75T,890MM					
L401	AA27-30003R	COIL-LINEARITY:-,220UH,YL10X10,0.35MM,23					
LW01	AA27-40001M	COIL-HORIZ,WIDTH:-,180/480UH,SB-5S6202.6					
R302	2003-001043	R-METAL OXIDE(S):510OHM,5%,1W,AF,TP,2.5X					
R305	2004-004087	R-METAL(S):1.5OHM,1%,1/2W,AA,TP,2.5X6.5M					
R417	2008-000259	R-FUSIBLE(S):1.8 OHM,5%,2W,AA,TP,3.9X10M					
R420	2004-002015	R-METAL(S)140KOHM,1%,-,1/2W,AA,TP,2.4X6.4					
R611	2001-000258	R-CARBON:1.8KOHM 5% 1/8W AA TP 1.8X3.2M					
R814	2008-000271	R-FUSIBLE(S):3.3OHM,5%,2W,AA,TP,3.9X10MM		*		HA91-100004 ASSY-CABINET,FRONT:3373	
R815	2008-000271	R-FUSIBLE(S):3.3OHM,5%,2W,AA,TP,3.9X10MM				HA64-300011 CABINET-FRONT:DP:3373,-,HIPS,HB,BLK,-,-	
△ T444	AA26-30005L	TRANS-FLYBACK:-,FSA38019S,14,125V				HA64-300018 CABINET-BACK:DP:3373,HIPS,V2,BLK,-,-	
TUBE	AA39-20567A	LEAD-CONNECTOR,ASSY:-,TUBE,7ΔfjÄ,-,25mm,				AA61-60003J SPRING-CS:-,SUS304,0.5,OD6,H12,N7,-,-	
△ V999	3704-001089	SOCKET-CRT:7P,22.5PI,12PI,SN,				AA64-10043A KNOB-CONTROL:-,3373,-,ABS,HB,BLK	
		BUYER : SEPOL (ONLY) LD901				AA64-10137A KNOB-POWER:-,ABS,HB,BLK,-,337	
LD901	AA96-30001B	ASSY-LED,GUIDE:-,AA61-50055A,DL-G5RGA,-				AA64-40051A WINDOW-REMOCON:3373,-,ABS,HB,-,NO,SILK	
						AA64-40184A INDICATOR-LED:-,ACRYL,-,-,3373,-	
						AA64-70009F BADGE-BRAND:-,AL,-,L40,SILVER,R800	
						AA65-30016A CLAMP-D,COIL:-,NYLON,V0,NTR,DADH-360	

7-5 CK5373Z5X (CK5073Z5X AND CK5373Z5X Dissimilar Parts)

Loc. No.	Code No.	Description ; Specification	Remark	Loc. No.	Code No.	Description ; Specification	Remark
ASSY-PCB,MAIN				ASSY-CRT			
		BUYER : SEH				AA64-40083A WINDOW-REMOCON:ABS HB NO SLIK 5373	
*	HA94-100132	ASSY-PCB,MAIN:CK5373T5X/XEH,S15A				AA64-40183A INDICATOR-LED:ACRYL 5373	
C409	2306-000253	C-FILM,MPPF:7.2 NF 5% 1.6KV 28.5X18.5X20					
C410	2201-000406	C-CERAMIC,DISC:270PF,10%,2KV,Y5P,8X5.5TP					
C419	2201-000984	C-CERAMIC,DISC:680PF,10%,2KV,Y5P,TP,11X					
CN802	AA27-20003Z	COIL-DEGAUSSING:-,21,13.5OHM,25T,L2380					
LW01	AA27-40001N	COIL-HORIZ,WIDTH:-,90/260UH,SB-5S620,PI0					
R301	2004-000869	R-METAL:3KOHM,1%,1/8W,AA,TP,1.8X3.2MM					
ASSY-CABINET OPTION (CK5373Z5X)							
△		AA03-10031E CRT-COLOR:-,A51EERX131X,+400MG,21,90DEG					
△		AA27-50005G DEFLECTION-YOKE:-,DST-21944(2),21/A51EE					
*	HA91-100005	ASSY-CABINET,FRONT:5373					
	HA64-300012	CABINET-FRONT:DP:5373,-,HIPS,HB,BLK,-,-					
	HA64-300019	CABINET-BACK:DP:5373,HIPS,V2,BLK,-,-					
	AA65-30019A	CLAMP-D,COIL:-,NYLON,V0,NTR,DADH-460					
	AA63-50098A	GRILLE-WOOFER:DP AA63-50097A,5373					
	AA64-10041A	KNOB-CONTROL:-,5373,-,ABS,HB,BLK					
	AA64-10132A	KNOB-POWER:ABS HB BLK NO COATING					

7-6 CK5073Z5X Parts List

Loc. No.	Code No.	Description ; Specification	Remark	Loc. No.	Code No.	Description ; Specification	Remark
ASSY-PCB MAIN				C504	2401-001232	C-AL:4.7UF,20%,250V,GP,10X12.5MM,5M	
		BUYER : SEH		C506	2401-000430	C-AL:10UF,20%,250V,GP,TP,10X16MM,5M	
*	HA94-100135	ASSY-PCB MAIN:CK5073Z5X/XEH,S15A		C601	2202-000210	C-CERAMIC,MLC-AXIAL:270PF,10%,50V,Y5P,-,7.5MM,TP	
		BUYER : SEKO		C602	2401-000939	C-AL:22UF,20%,25V,GP,TP5X11MM,5	
*	HA94-100272	ASSY-PCB,MAIN:CK5073Z5S/XEK,S15A		C603	2301-000264	C-FILM,PEF:4.7NF,5%,50V,6.5X5.5X3.0X5.5MM,5MM	
				C604	2401-001323	C-AL:470NF,20%,50V,BP,6X11MM,5MM,TP	
C101	2401-000939	C-AL:22UF,20%,25V,GP,TP5X11MM,5		C610	2401-001998	C-AL:1000UF,20%,25V,GP,TP,10X20,5MM	
C102	2401-001082	C-AL:330NF,20%,50V,GP,5X11MM,5MM,TP		C613	2202-000796	C-CERAMIC,MLC-AXIAL:1NF,10%,50V,Y5P,TP,5.5X19,-	
C103	2401-001363	C-AL:470UF,20%,16V,GP,TP,10X12.5MM,		C614	2202-000210	C-CERAMIC,MLC-AXIAL:270PF,10%,50V,Y5P,-,7.5MM,TP	
C201	2306-000122	C-FILM,MPPF:100NF,5%,50V,7.3X4.0X5.0MM,5MM		C702	2202-000263	C-CERAMIC,MLC-AXIAL:470PF,10%,50V,Y5P,TP,3.5X19,-	
C202	2401-001840	C-AL:100UF,20%,16V,GP,TP8X11.5MM,5		C704	2202-000121	C-CERAMIC,MLC-AXIAL:100PF,10%,50V,Y5P,1.9X3.5MM,-	
C203	2401-000660	C-AL:2.2 UF 20% 50V GP 5X11.5 TP		C705	2401-001264	C-AL:4.7UF,20%,50V,BP,6X11MM,5MM,TP	
C204	2401-000603	C-AL:1UF,20%,50V,GP,5X11MM,5MM,TP		C706	2401-001264	C-AL:4.7UF,20%,50V,BP,6X11MM,5MM,TP	
C205	2305-000411	C-FILM,MPEF:470NF,5%,50V,7.3X4.8X5.5MM,5MM		C800	2306-000320	C-FILM,MPPF:470NF,20%,250V,TP,-,20MM	
C206	2305-000411	C-FILM,MPEF:470NF,5%,50V,7.3X4.8X5.5MM,5MM		C801	2401-000534	C-AL:150UF,20%,400V,GP,25X30,10,ST BUYER : SEKO (ONLY) C801	
C207	2305-000196	C-FILM,MPEF:150NF,5%,63V,TP,-,5MM		C801	2401-002213	C-AL:150UF,+30-10%,450V,-,25X35,10M (SEKO)	
C208	2401-000027	C-AL:4.7UF,20%,50V,GP,TP5X11MM,5MM		C802	2401-002284	C-AL:33UF,20%,50V,GP,TP5X11MM,5MM	
C209	2202-000794	C-CERAMIC,MLC-AXIAL:18PF,5%,50V,CH,TP,3.5X19MM		C803	2301-000224	C-FILM,PEF:22NF,5%,50V,7.4X3.9X13MM,5MM,T	
C210	2301-000264	C-FILM,PEF:4.7NF,5%,50V,6.5X5.5X3.0X5.5MM		C804	2301-000310	C-FILM,PEF:68NF,5%,50V,8.0X8.5X4.0X5.5MM,	
C211	2305-000665	C-FILM,MPEF:100NF,5%,63V,7.5X4.0X5.0MM,5MM		C805	2303-000163	C-FILM,PPF:2.2NF,5%,800V,-,-,TP	
C212	2202-000796	C-CERAMIC,MLC-AXIAL:1NF,10%,50V,Y5P,TP,5.5X19,-		C806	2201-000446	C-CERAMIC,DISC:3.3NF,20%,400V,Y5U,TP,18X8,10M	
C213	2201-000273	C-CERAMIC,DISC:18PF,5%,50V,NPO,5.0*3.0,2.5MM,		C807	2201-000991	C-CERAMIC,DISC:560PF 10% 2KV Y5P 8X5.5 TP	
C214	2301-000285	C-FILM,PEF:47NF,5%,50V,7.5X4.0X6.5,5MM,TP		C808	2401-000262	C-AL:100UF,20%,160V,GP,16X25MM,5MM,	
C215	2301-000380	C-FILM,PEF:10NF,5%,50V,6.5X3MM,5MM,TP		C809	2401-002290	C-AL:47UF,20%,160V,GP,TP,13X20MM,5M	
C216	2305-000288	C-FILM,MPEF:220NF,5%,50V,7.3X4.8X5.5MM,5MM		C810	2201-000991	C-CERAMIC,DISC:560PF 10% 2KV Y5P 8X5.5 TP	
C217	2301-000192	C-FILM,PEF:1NF,5%,50V,5.3X10MM,5MM,TP		C811	2401-003141	C-AL:220UF,20%,25V,WT,TP,13X25,5MM	
C219	2401-000603	C-AL:1UF,20%,50V,GP,5X11MM,5MM,TP		C814	2301-000192	C-FILM,PEF:1NF,5%,50V,5.3X10MM,5MM,TP	
C221	2202-000121	C-CERAMIC,MLC-AXIAL:100PF,10%,50V,Y5P,1.9X3.5MM,-		C815	2401-000808	C-AL:220UF,20%,16V,GP,8X11MM,5MM,TP	
C222	2401-000440	C-AL:10UF,20%,25V,GP,5X11MM,5MM,TP		C816	2401-000603	C-AL:1UF,20%,50V,GP,5X11MM,5MM,TP	
C224	2202-000295	C-CERAMIC,MLC-AXIAL:68PF,5%,50V,SL,3.5X19,-,TP		C818	2401-001495	C-AL:47UF,20%,16V,GP,5X11MM,5MM,TP	
C226	2301-000224	C-FILM,PEF:22NF,5%,50V,7.4X3.9X13MM,5MM,T		C819	2401-001840	C-AL:100UF,20%,16V,GP,TP8X11.5MM,5	
C230	2401-001495	C-AL:47UF,20%,16V,GP,5X11MM,5MM,TP		C901	2401-001840	C-AL:100UF,20%,16V,GP,TP8X11.5MM,5	
C231	2401-000416	C-AL:10UF,20%,16V,GP,TP5X11,5MM		C902	2202-000796	C-CERAMIC,MLC-AXIAL:1NF,10%,50V,Y5P,TP,5.5X19,-	
C232	2401-001840	C-AL:100UF,20%,16V,GP,TP8X11.5MM,5		C904	2202-000796	C-CERAMIC,MLC-AXIAL:1NF,10%,50V,Y5P,TP,5.5X19,-	
C238	2401-001495	C-AL:47UF,20%,16V,GP,5X11MM,5MM,TP		C905	2401-001333	C-AL:0.47UF 20% 50V GP 5X11,5 TP	
C239	2305-000288	C-FILM,MPEF:220NF,5%,50V,7.3X4.8X5.5MM,5MM		C907	2201-000119	C-CERAMIC,DISC:100NF,+80-20%,50V,Y5V,8X5MM,5M	
C240	2305-000665	C-FILM,MPEF:100NF,5%,63V,7.5X4.0X5.0MM,5MM		C908	2201-000193	C-CERAMIC,DISC:10PF,0.25PF,50V,NPO,-,5MM,TP	
C247	2202-002037	C-CERAMIC,MLC-AXIAL:100NF,80-20%,50V,Y5P,TP,2.2X3		C909	2201-000193	C-CERAMIC,DISC:10PF,0.25PF,50V,NPO,-,5MM,TP	
C248	2309-000138	C-FILM,PE:PPF:100NF,5%,50V,16X7MM,7.5MM,TP		C910	2306-000122	C-FILM,MPPF:100NF,5%,50V,7.3X4.0X5.0MM,5MM	
C249	2401-000603	C-AL:1UF,20%,50V,GP,5X11MM,5MM,TP		C911	2401-002235	C-AL:10UF,20%,16V,GP,TP5X11MM,5MM	
C250	2301-000224	C-FILM,PEF:22NF,5%,50V,7.4X3.9X13MM,5MM,T		C912	2201-000234	C-CERAMIC,DISC:150PF,5%,50V,NPO,10X3.5MM,5MM,	
C251	2301-000204	C-FILM,PEF:2.7NF,5%,50V,7.4X3.9X13MM,5MM,		C913	2301-000108	C-FILM,PEF:1.5NF,5%,50V,6.5X3.0X5.5MM,5MM	
C252	2301-000192	C-FILM,PEF:1NF,5%,50V,5.3X10MM,5MM,TP		C914	2306-000122	C-FILM,MPPF:100NF,5%,50V,7.3X4.0X5.0MM,5MM	
C253	2306-000122	C-FILM,MPPF:100NF,5%,50V,7.3X4.0X5.0MM,5MM		C915	2306-000122	C-FILM,MPPF:100NF,5%,50V,7.3X4.0X5.0MM,5MM	
C254	2306-000122	C-FILM,MPPF:100NF,5%,50V,7.3X4.0X5.0MM,5MM		C916	2301-000264	C-FILM,PEF:4.7NF,5%,50V,6.5X5.5X3.0X5.5MM	
C255	2306-000122	C-FILM,MPPF:100NF,5%,50V,7.3X4.0X5.0MM,5MM		C917	2202-002037	C-CERAMIC,MLC-AXIAL:100NF,80-20%,50V,Y5P,TP,2.2X3	
C301	2202-000253	C-CERAMIC,MLC-AXIAL:4.7NF,20%,16V,Y5R,TP,1.9X3.5,		C919	2202-000796	C-CERAMIC,MLC-AXIAL:1NF,10%,50V,Y5P,TP,5.5X19,-	
C302	2202-000253	C-CERAMIC,MLC-AXIAL:4.7NF,20%,16V,Y5R,TP,1.9X3.5,		C920	2401-000480	C-AL:10UF,20%,50V,GP,5X11MM,5MM,TP	
C303	2401-003028	C-AL:100UF,20%,25V,WT,TP,6.3X11,5MM		C922	2201-000573	C-CERAMIC,DISC:47PF,5%,50V,NPO,6.5X3.0,5MM,TP	
C304	2401-000903	C-AL:22UF,20%,160V,WT,TP,10X20MM,5M		C923	2202-002037	C-CERAMIC,MLC-AXIAL:100NF,80-20%,50V,Y5P,TP,2.2X3	
C305	2305-000178	C-FILM,MPEF:10NF,5%,100V,-,5MM,TP		C924	2202-002037	C-CERAMIC,MLC-AXIAL:100NF,80-20%,50V,Y5P,TP,2.2X3	
C306	2305-000285	C-FILM,MPEF:220NF,5%,100V,-,5MM,TP		C926	2202-000796	C-CERAMIC,MLC-AXIAL:1NF,10%,50V,Y5P,TP,5.5X19,-	
C307	2305-000149	C-FILM,MPEF:100NF,5%,100V,7.5X4.05,0MM		C927	2201-000573	C-CERAMIC,DISC:47PF,5%,50V,NPO,6.5X3.0,5MM,TP	
C308	2305-000450	C-FILM,MPEF:56NF,5%,100V,TP,-,5MM		CA01	2401-001264	C-AL:4.7UF,20%,50V,BP,6X11MM,5MM,TP	
C401	2301-000380	C-FILM,PEF:10NF,5%,50V,6.5X3MM,5MM,TP		CN501	AA39-20109B	LEAD-CONNECTOR,ASSY:-,YBNH025-08,S,8P,500,1007#26	
C402	2201-000599	C-CERAMIC,DISC:560PF 10% 500V Y5P 6X4MM,5MM		CN601	3711-002642	CONNECTOR-HEADER:BOX,3P,1R,2.5MM,STRAIGHT,SN	
C403	2201-000556	C-CERAMIC,DISC:470PF,10%,500V,Y5P,6X3.5MM,5MM		CN703	3711-002648	CONNECTOR-HEADER:BOX,9P,1R,2.5MM,STRAIGHT	
C404	2401-001998	C-AL:1000UF,20%,25V,GP,TP,10X20,5MM		CN802	AA27-20003Y	COIL-DEGAUSSING:-,20,15,20HM,28T,L2170,E	
C408	2401-001530	C-AL:47UF,20%,25V,GP,5X11MM,5MM,TP		CW901	2503-000156	C-NETWORK:100PF,4,20%50V	
C409	2306-000355	C-FILM,MPPF:7.4NF,5%,1.6KV,28.5X18.5X12.20		D201	0401-000005	DIODE-SWITCHING:1N4148,75V,300MA,DO-35,TP	
C410	2201-000983	C-CERAMIC,DISC:1NF,10%,2KV,Y5P,8X5,5,TP		D202	0401-000005	DIODE-SWITCHING:1N4148,75V,300MA,DO-35,TP	
C411	2401-000927	C-AL:22UF,20%,250V,GP,13X20MM,5MM,T		D205	0401-000005	DIODE-SWITCHING:1N4148,75V,300MA,DO-35,TP	
C413	2305-000382	C-FILM,MPEF:4.7NF,5%,400V,TP,-,5MM		D208	2001-000633	R-CARBON:30KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
C414	2301-001065	C-FILM,MPPF:47NF,5%,630V,TP,19X15.5X7,7.5		D209	0401-000005	DIODE-SWITCHING:1N4148,75V,300MA,DO-35,TP	
C415	2401-000560	C-AL:1UF,20%,160V,GP,TP,6.3*11,5MM		D210	0401-000005	DIODE-SWITCHING:1N4148,75V,300MA,DO-35,TP	
C416	2306-000204	C-FILM,MPPF:430NF,5%,400V,-,20MM,TP		D211	0401-000005	DIODE-SWITCHING:1N4148,75V,300MA,DO-35,TP	
C417	2201-000556	C-CERAMIC,DISC:470PF,10%,500V,Y5P,6X3.5MM,5MM		D213	0401-000005	DIODE-SWITCHING:1N4148,75V,300MA,DO-35,TP	
C418	2401-000384	C-AL:10UF,20%,100V,GP,TP,6.3X11,5MM		D401	0402-000132	DIODE-RECTIFIER:1N4004,400V,1A,DO-41	
C419	2201-000984	C-CERAMIC,DISC:680PF,10%,2KV,Y5P,TP,11X6.7.5		D402	0402-000132	DIODE-RECTIFIER:1N4004,400V,1A,DO-41	
C502	2301-000213	C-FILM,PEF:220NF,5%,250V,21.5X11MM,17.5MM		D403	0402-001105	DIODE-RECTIFIER:ERB43-04SV1,400V,1.0A,-,TP	
C503	2201-002063	C-CERAMIC,DISC:10NF,-20,+80%,3KV,Y5V,TP,16X5,		D404	0402-000534	DIODE-RECTIFIER:RG10V,400V,1.2A	
				D405	0402-001105	DIODE-RECTIFIER:ERB43-04SV1,400V,1.0A,-,TP	

Loc. No.	Code No.	Description ; Specification	Remark	Loc. No.	Code No.	Description ; Specification	Remark
D406	0402-001105	DIODE-RECTIFIER:ERB43-04SV1,400V,1.0A,-,TP		L703	2701-000184	INDUCTOR-AXIAL:4.7UH,	
D501	0402-000216	DIODE-RECTIFIER:ERC24-06,600V,1.0A,DO-204		L704	2701-000184	INDUCTOR-AXIAL:4.7UH,	
D502	0402-001105	DIODE-RECTIFIER:ERB43-04SV1,400V,1.0A,-,TP		L706	2701-000184	INDUCTOR-AXIAL:4.7UH,	
D503	0402-001105	DIODE-RECTIFIER:ERB43-04SV1,400V,1.0A,-,TP		L801	AA29-30001G	FILTER-LINE:-,27MH,-,-,-	
D504	0402-001105	DIODE-RECTIFIER:ERB43-04SV1,400V,1.0A,-,TP		L804	3301-000287	CORE-FERRITE BEAD:AA,3.5X1.0X6.0MM,1500,2400G	
D701	0401-000005	DIODE-SWITCHING:1N4148,75V,300MA,DO-35,TP		L805	2901-000297	FILTER-EMI ON BOARD:-,3A,-,-,3.5X5,TP-	
D800	1405-000152	VARISTOR:560V,2500A,14X8,5MM,TP		L807	2901-000297	FILTER-EMI ON BOARD:-,3A,-,-,3.5X5,TP-	
D801	0402-000102	DIODE-BRIDGE:D2SB60,600V,1.5A,-		L809	2701-001032	INDUCTOR-AXIAL:100UH,10%,5X14MM	
D802	0402-000540	DIODE-RECTIFIER:RU20A,600V,1.5A,-		L810	2701-001032	INDUCTOR-AXIAL:100UH,10%,5X14MM	
D804	0402-000213	DIODE-RECTIFIER:ERB12-06,600V,1A		L902	2701-000189	INDUCTOR-AXIAL:470NH,10%,2.5X3.4MM	
D805	0402-000534	DIODE-RECTIFIER:RG10V,400V,1.2A		L904	2701-000299	INDUCTOR-AXIAL:13UH,10%,2.5X3.4MM	
D809	0401-000005	DIODE-SWITCHING:1N4148,75V,300MA,DO-35,TP		NT801	1404-000187	THERMISTOR-NTC:4.7 OHM,15% 2800K,27,2MMW/C,TP	
D810	0402-000216	DIODE-RECTIFIER:ERC24-06,600V,1.0A,DO-204		P801	1404-001048	THERMISTOR-PTC:70HM,30%,200/220V,270V,19A,-,B	
D901	0401-000005	DIODE-SWITCHING:1N4148,75V,300MA,DO-35,TP		PC801	0604-001038	PHOTO-COUPLER:TR,130-260%,200MW,DIP-4,ST	
D903	0401-000005	DIODE-SWITCHING:1N4148,75V,300MA,DO-35,TP		Q201	0501-002183	TR-SMALL SIGNAL:KTC9014,NPN,625MMW,TO-92,TP,100	
D905	0401-000005	DIODE-SWITCHING:1N4148,75V,300MA,DO-35,TP		Q202	0501-002183	TR-SMALL SIGNAL:KTC9014,NPN,625MMW,TO-92,TP,100	
D906	0401-000005	DIODE-SWITCHING:1N4148,75V,300MA,DO-35,TP		Q204	0501-002183	TR-SMALL SIGNAL:KTC9014,NPN,625MMW,TO-92,TP,100	
D907	0401-000005	DIODE-SWITCHING:1N4148,75V,300MA,DO-35,TP		△ Q401	0502-001115	TR-POWER:KSC5386,NPN,50W,TO-3PF,ST-8-	
D908	0401-000005	DIODE-SWITCHING:1N4148,75V,300MA,DO-35,TP		△ Q402	0501-000369	TR-SMALL SIGNAL:KSC2331-Y NPN 80V 60V 700MA	
D910	2001-000734	R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM		Q701	0501-002183	TR-SMALL SIGNAL:KTC9014,NPN,625MMW,TO-92,TP,100	
DA01	0401-000005	DIODE-SWITCHING:1N4148,75V,300MA,DO-35,TP		Q703	0501-000283	TR-SMALL SIGNAL:KSA539 PNP 60V 45V 200MA 40	
DZ201	0403-000295	DIODE-ZENER:MTZ5.1B 5.1V 4.94 5.20V 500MW		Q901	0501-002183	TR-SMALL SIGNAL:KTC9014,NPN,625MMW,TO-92,TP,100	
DZ202	0403-000551	DIODE-ZENER:MTZ3.9B,3.9V,3.89-4.16V,500MW		Q902	0501-002183	TR-SMALL SIGNAL:KTC9014,NPN,625MMW,TO-92,TP,100	
DZ203	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500MW		Q903	0501-002183	TR-SMALL SIGNAL:KTC9014,NPN,625MMW,TO-92,TP,100	
DZ204	2001-000812	R-CARBON:5.6KOHM,5%,1/8W,AA,TP,1.8X3.2MM		Q904	0504-000123	TR-DIGITAL:KSR1010,NPN,300MW,10K,TO-92,TP	
DZ205	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500MW		Q905	0504-000123	TR-DIGITAL:KSR1010,NPN,300MW,10K,TO-92,TP	
DZ208	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500MW		Q906	0504-000123	TR-DIGITAL:KSR1010,NPN,300MW,10K,TO-92,TP	
DZ301	0403-000660	DIODE-ZENER:MTZ22A 22V 20 15-21 2V 500MW		Q907	0504-000125	TR-DIGITAL:KSR1012,NPN,300MW,47K,TO-92,TP	
DZ302	0403-001039	DIODE-ZENER:MA2560,56V,52-60,1W,DO-4		Q908	0504-000123	TR-DIGITAL:KSR1010,NPN,300MW,10K,TO-92,TP	
DZ401	0403-000296	DIODE-ZENER:MTZ 5.6B		QA01	0501-002183	TR-SMALL SIGNAL:KTC9014,NPN,625MMW,TO-92,TP,100	
DZ501	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500MW		R200	2001-000780	R-CARBON:470 OHM 5% 1/8W AATP 1.8X3.2MM	
DZ502	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500MW		R201	2001-000005	R-CARBON:390OHM,5%,1/8W,AA,TP,1.8X3.2MM	
DZ503	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500MW		R202	2001-000281	R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
DZ504	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500MW		R203	2001-000281	R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
DZ701	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500MW		R204	2001-000281	R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
DZ702	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500MW		R207	2001-000008	R-CARBON:15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DZ703	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500MW		R208	2001-000005	R-CARBON:390OHM,5%,1/8W,AA,TP,1.8X3.2MM	
DZ704	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500MW		R209	2701-000114	INDUCTOR-AXIAL:10UH,10%,2.5X3.4MM	
DZ705	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500MW		R210	2001-000429	R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DZ802	0403-000297	DIODE-ZENER:MTZ6.2B,6.2V,5.96-6.27V,500MW		R211	2001-000331	R-CARBON:12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DZ803	1203-001217	IC-POS.ADJUST REG:431,TO-92,3P,4.58MIL,PLASTIC,2		R212	2001-000281	R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
DZ804	2001-001170	R-CARBON(S):6.8OHM,5%,1/2W,AA,TP,2.4X6.4MM		R213	2001-000281	R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
DZ808	0403-000300	DIODE-ZENER:MTZ8.2B,7.78-8.19V,500MW,DO-34		R214	2001-000281	R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
DZ809	0403-000296	DIODE-ZENER:MTZ 5.6B		R215	2004-001995	R-METAL:9.1KOHM,5%,1/8W,AA,TP,1.8X3.2M	
DZ901	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500MW		R216	2001-000490	R-CARBON:2000HM,5%,1/8W,AA,TP,1.8X3.2MM	
DZ902	0403-000296	DIODE-ZENER:MTZ 5.6B		R217	2001-000449	R-CARBON:2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
DZ903	1203-000451	IC-VOLTAGE REGULATOR:33 TO 92,3P PLASTIC-31/35		R218	2001-000591	R-CARBON:3.3 KOHM 5% 1/8W AATP1.8X3.2MM	
DZ905	0403-000296	DIODE-ZENER:MTZ 5.6B		R219	2001-000008	R-CARBON:15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DZ907	0403-000296	DIODE-ZENER:MTZ 5.6B		R221	2001-000290	R-CARBON:10KOHM 5% 1/8W AATP 1.8X3.2 MM	
DZ909	0403-000551	DIODE-ZENER:MTZ3.9B,3.9V,3.89-4.16V,500MW		R223	2004-001205	R-METAL:68OHM,5%,1/8W,AA,TP,1.8X3.2MM	
△ F801	3601-000261	FUSE-FERRULE:3.15A 250V		R224	2001-000563	R-CARBON:27 KOHM 5% 1/8W AATP 1.8X3.2MM	
F801A	3602-000114	FUSE-HOLDER:-,30MOHM		R225	2001-000554	R-CARBON:2700HM,5%,1/8W,AA,TP,1.8X3.2MM	
F801B	3602-000114	FUSE-HOLDER:-,30MOHM		R226	2001-000281	R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
△ F802	3601-001086	FUSE-FERRULE:125V,5A,QUICK,CERAMIC		R227	2004-001234	R-METAL:75KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
△ IC201	1204-001386	IC-VIDEO SYSTEM:TDA8842,DIP,56P,300MIL,PLASTIC		R229	2001-000890	R-CARBON:6.8KOHM,5%,1/8W,AA,TP,1.8X3.2M	
△ IC301	1204-000441	IC-IF CIRCUIT:TDA8356,SIP,9P,-,PLASTIC,40V		R230	2001-000793	R-CARBON:47OHM,5%,1/8W,AA,TP,1.8X3.2MM	
△ IC501	1201-001159	IC-VIDEO AMP:6107,ZIP,9P,300MIL,SINGLE,-,PL		R231	2001-000563	R-CARBON:27 KOHM 5% 1/8W AATP 1.8X3.2MM	
△ IC601	1201-001147	IC-AUDIO AMP:7056,SIP,9P,-,SINGLE,41.5DB,P		R232	2001-000356	R-CARBON:150KOHM,5%,1/8W,AA,TP,1.8X3.2M	
△ IC801	1203-001494	IC-PWM CONTROLLER:3S0680RF,TO3PF-5L,5,210,PLASTI		R234	2001-000281	R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
△ IC802	1203-001531	IC-POS, FIXED REG:7630,SIP,10P,-,PLASTIC		R236	2003-000634	R-METAL OXIDE(S):3.9KOHM,5%,1W,AA,TP,3.3X9MM	
△ IC901	AA13-30020GIC-MCU:-,290234-R3782,8BIT,SDIP,CS-53			R237	2001-000793	R-CARBON:47OHM,5%,1/8W,AA,TP,1.8X3.2MM	
△ IC902	1103-001105	IC-EEPROM:24C040,512X8BIT,DIP,8P,300MIL,		R238	2001-000739	R-CARBON:4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
J185	2701-000114	INDUCTOR-AXIAL:10UH,10%,2.5X3.4MM		R239	2001-000739	R-CARBON:4.7MOHM,5%,1/8W,AA,TP,1.8X3.2M	
JS701	3722-000183	JACK-RCA:21P,4MM,-,SN		R240	2001-000832	R-CARBON:5100HM,5%,1/8W,AA,TP,1.8X2.3M	
L102	2701-000212	INDUCTOR-AXIAL:68UH,10%,2.8X7MM		R241	2001-000734	R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
L103	2701-000114	INDUCTOR-AXIAL:10UH,10%,2.5X3.4MM		R242	2001-000734	R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
L202	2701-000168	INDUCTOR-AXIAL:3.3 UH 5% 2.5X3.4 MM		R251	2001-000429	R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
L206	2701-000114	INDUCTOR-AXIAL:10UH,10%,2.5X3.4MM		R252	2004-001914	R-METAL:39KOHM,2%,1/8W,AA,TP,1.8X3.5MM	
L301	2701-000114	INDUCTOR-AXIAL:10UH,10%,2.5X3.4MM		R262	2001-000429	R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
L302	2701-000114	INDUCTOR-AXIAL:10UH,10%,2.5X3.4MM		R301	2004-001983	R-METAL:2.49KOHM,1%,1/2W,AA,TP,2.4X6.4	
L304	2701-000159	INDUCTOR-AXIAL:22UH,10%,4.2X9.8MM		R302	2008-001033	R-FUSIBLE:10 OHM 5% 2W AF TP 10X3.9MM	
L305	2701-000116	INDUCTOR-AXIAL:10 UH 10% 4.2X9.8MM		R303	2001-000273	R-CARBON:100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
L306	2701-000115	INDUCTOR-AXIAL:10UH,10%,2.8X7MM		R305	2004-001370	R-METAL(S):1.30HM,1%,1/2W,AA,TP,2.4X6.4MM	
L401	AA27-30001B	COIL-LINEARITY:-,195UH,QIC1010,PIO,4,4.5X21.5		R306	2008-000254	R-FUSIBLE(S):0.68 OHM 5% 2T AF TP 3.9X10MM	
L402	2901-000297	FILTER-EMI ON BOARD:-,3A,-,-,3.5X5,TP-		R307	2003-001026	R-METAL OXIDE(S):180OHM,5%,2W,AF,TP,3.9X	
L601	2701-000146	INDUCTOR-AXIAL:2.2UH,10%,2.5X3.4MM		R402	2003-000664	R-METAL OXIDE(S):33OHM,5%,2W,AF,TP,4X12MM	
L702	2701-000184	INDUCTOR-AXIAL:4.7UH,		R403	2001-001114	R-CARBON(S):2700HM,5%,1/2W,AA,TP,2.4X6.4MM	

Loc. No.	Code No.	Description ; Specification	Remark
R404	2008-000294	R-FUSIBLE(S):33ohm,5%,2W,AF,TO,3.9X10MM	
R405	2001-001410	R-CARBON(S):43 OHM 5%1/2W,AA,TP,2.4X6.4MM	
R406	2001-000037	R-CARBON(S):330OHM,5%,1/2W,AA,TP,2.4X6.4MM	
R407	2001-001037	R-CARBON(S):0.390HM,5%,1/2W,AA,TP,2.4X6.4M	
R408	2001-000022	R-CARBON(S):330OHM,5%,1/2W,AA,TP,2.4X6.4MM	
R409	2008-000204	R-FUSIBLE(S):0.220HM,10%,1/2W,AF,TP,2.5X6.5	
R412	2003-000664	R-METAL OXIDE(S):330HM,5%,2W,AF,TP,4X12MM	
R413	2003-000784	R-METAL OXIDE(S):7.5KOHM,5%,2W,AD,TP,4X12MM	
R414	2003-000540	R-METAL OXIDE(S):1KOHM,5%,2W,AD,TP,4X12MM	
R415	2008-000206	R-FUSIBLE(S):10HM,5%,1/2W,AF,TP,2.5X6.5MM	
R416	2008-000277	R-FUSIBLE:680HM,5%,1/2W,AA,TP,4.7X11MM	
R417	2008-000265	R-FUSIBLE(S):10HM,5%,2W,AA,TP,3.9X10MM	
R420	2004-001377	R-METAL(S):120 KOHM 1/2W 1% AA TP 2.4X6.M	
R501H	2002-001008	R-COMPOSITION:1.8KOHM,5%,1/2W,AA,TP,3.7X9MM	
R502H	2002-001008	R-COMPOSITION:1.8KOHM,5%,1/2W,AA,TP,3.7X9MM	
R503	2002-001008	R-COMPOSITION:1.8KOHM,5%,1/2W,AA,TP,3.7X9MM	
R504	2001-001062	R-CARBON(S):10MOHM,5%,1/2W,AA,TP,2.4X6.4MM	
R505	2008-001011	R-FUSIBLE(S):0.180HM,10%,2W,AF,TP,3.9X10MM	
R510	2001-000281	R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
R511	2001-000281	R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
R512	2001-000281	R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
R603	2001-000241	R-CARBON:1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R604	2001-000734	R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R610	2001-000347	R-CARBON:13KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R611	2001-000577	R-CARBON:2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R701	2001-000281	R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
R702	2001-000969	R-CARBON:750HM,5%,1/8W,AA,TP,1.8X3.2MM	
R703	2001-000429	R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R705	2001-000003	R-CARBON:330 OHM 5% 1/8W AATP 1.8X3.2MM	
R706	2001-000221	R-CARBON:1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R713	2001-000812	R-CARBON:5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R714	2001-000429	R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R715	2001-000812	R-CARBON:5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R717	2001-000812	R-CARBON:5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R801	2003-000994	R-METAL OXIDE(S):33KOHM,5%,2W,AF,TP,3.9X10MM	
R802	2003-000994	R-METAL OXIDE(S):33KOHM,5%,2W,AF,TP,3.9X10MM	
R803	2001-001178	R-CARBON(S):680OHM,5%,1/2W,AA,TP,2.4X6.4MM	
R805	2003-001023	R-METAL OXIDE(S):1200HM,5%,2W,AA,TP,3.9X10MM	
R806	2002-001011	R-COMPOSITION:3.3MOHM,10%1/2W,AA,TP,3	
R807	2002-001011	R-COMPOSITION:3.3MOHM,10%1/2W,AA,TP,3	
R808	2001-000022	R-CARBON(S):330HM,5%,1/2W,AA,TP,2.4X6.4MM	
R809	2001-000622	R-CARBON:300KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R810	2003-000527	R-METAL OXIDE(S):18KOHM,5%,2W,AA,TP,4X12MM	
R812	2003-000455	R-METAL OXIDE(S):1000HM,5%,2W,AA,TP,4X12MM	
R814	2008-000267	R-FUSIBLE(S):2.40HM,5%,2W,AA,TP,3.9X10MM	
R815	2008-000267	R-FUSIBLE(S):2.40HM,5%,2W,AA,TP,3.9X10MM	
R816	2004-004089	R-METAL:123KOHM,1%,1/2W,AA,TP,2.5X6.5M	
R817	2004-001983	R-METAL:2.49KOHM,1%,1/2W,AA,TP,2.4X6.4	
R818	2004-001371	R-METAL(S):1.5KOHM,1%,1/2W,AA,TP,2.4X6.4M	
R819	2004-001390	R-METAL(S):1KOHM,2%,1/2W,AA,TP,2.4X6.4MM	
R820	2008-000299	R-FUSIBLE:47 OHM 5% 2T AP TP 3.9X10MM	
R821	2008-000266	R-FUSIBLE(S):10HM,5%,2W,AF,TP,3.9X10MM	
R822	2001-001150	R-CARBON(C):470KOHM,5%,1/2W,AA,TP,2.4X6.4M	
R823	2001-001150	R-CARBON(C):470KOHM,5%,1/2W,AA,TP,2.4X6.4M	
R825	2003-001040	R-METAL OXIDE(S):47KOHM,5%,2W,AF,TP,3.9X10MM	
R901	2001-000832	R-CARBON:510OHM,5%,1/8W,AA,TP,1.8X3.2M	
R902	2001-000734	R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R903	2001-000281	R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
R904	2001-000281	R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
R905	2001-000241	R-CARBON:1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R906	2001-000472	R-CARBON:2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R907	2001-000995	R-CARBON:820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
R908	2001-000232	R-CARBON:1.3KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R909	2001-000605	R-CARBON:3.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R910	2001-000290	R-CARBON:10KOHM 5% 1/8W AATP 1.8X3.2 MM	
R912	2004-001193	R-METAL:680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
R916	2001-000281	R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
R917	2001-000281	R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
R918	2001-000281	R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
R919	2001-000290	R-CARBON:10KOHM 5% 1/8W AATP 1.8X3.2 MM	
R920	2001-000864	R-CARBON:56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R921	2001-001062	R-CARBON(S):10MOHM,5%,1/2W,AA,TP,2.4X6.4MM	
R922	2001-000281	R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
R923	2001-000281	R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
R924	2001-000449	R-CARBON:2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R925	2001-000449	R-CARBON:2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R926	2001-000290	R-CARBON:10KOHM 5% 1/8W AATP 1.8X3.2 MM	

Loc. No.	Code No.	Description ; Specification	Remark
R927	2001-000290	R-CARBON:10KOHM 5% 1/8W AATP 1.8X3.2 MM	
R928	2001-000066	R-CARBON(S):10 KOHM 5% 1/2W AATP 2.4X6.4MM	
R929	2004-000253	R-METAL:11KOHM,1%,1/8W,AA,TP,1.8X3.2MM	
R930	2004-000218	R-METAL:10KOHM,1%,1/8W,AA,TP,1.8X3.2MM	
R931	2004-000218	R-METAL:10KOHM,1%,1/8W,AA,TP,1.8X3.2MM	
R934	2001-000449	R-CARBON:2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R936	2001-000734	R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R937	2001-000734	R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R938	2001-000472	R-CARBON:2.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R940	2001-000660	R-CARBON:33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R946	2001-000429	R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R947	2001-000429	R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R948	2001-000241	R-CARBON:1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R951	2001-000734	R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
R952	2001-000281	R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM	
R954	2001-000006	R-CARBON:2.4 KOHM 5% 1/8W AATP 1.8X3.2M	
R955	2001-000429	R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R956	2001-000429	R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
R960	2001-000290	R-CARBON:10KOHM 5% 1/8W AATP 1.8X3.2 MM	
R962	2001-000273	R-CARBON:100KOHM,5%,1/8W,AA,TP,1.8X3.2M	
RA01	2004-001193	R-METAL:680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
RA02	2001-000241	R-CARBON:1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M	
RA03	2001-000734	R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
RA04	2001-000734	R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M	
RL901	AA59-60001U	MODULE-REMOCON:-,ORC-50VF,38KHZ,940NM,MESH,V,	
RT03	2001-000252	R-CARBON:1.6KOHM,5%,1/8W,AA,TP,1.8X3.2M	
RW701	2011-001133	R-NETWORK:33K/24K/75X3,1/8W	
RW702	2011-001098	R-NETWORK:75/75/1K,75OHM,5%,--,P	
RX801	2002-001011	R-COMPOSITION:3.3MOHM,10%1/2W,AA,TP,3	
SFN02	2904-001063	FILTER-SAW:K2971M	
SW801	3403-001020	SWITCH-PUSH:250V,5A,DPST,OFF ON-OFF	
SW901	3404-000244	SWITCH-TACT:15V,20MA,90-170GF,7.5X7MM,SPST	
SW902	3404-000244	SWITCH-TACT:15V,20MA,90-170GF,7.5X7MM,SPST	
SW903	3404-000244	SWITCH-TACT:15V,20MA,90-170GF,7.5X7MM,SPST	
SW904	3404-000244	SWITCH-TACT:15V,20MA,90-170GF,7.5X7MM,SPST	
SW905	3404-000244	SWITCH-TACT:15V,20MA,90-170GF,7.5X7MM,SPST	
T401	AA26-50001B	HORIZ,DRIVE:-,7.1MH,102UH,10-20UH,YL081,ST	
T444	AA26-30001Y	TRANS-FLYBACK:-,FSV-20A001,20,125V	
T801	AA26-20007Q	TRANS-SWITCHING:-,180-260V,125V/12.5V,EN,EER28	
TU01	AA40-100060	TUNER-V/S;TELE4-125A,PAL-B/G,TR,181CH	
V999	3704-001090	SOCKET-CRT:9P,15.24P,26.5PI,SN,-	
X203	2801-000274	CRYSTA-UNIT:4.433618MHZ,30PPM,28AAM,20PF	
X901	2801-000724	CRYSTAL-UNIT:6MHZ,50PPM,28-AAM,20PF,400HM,T	
Z201	2903-000199	FILTER-CERAMIC:BP,6.5MHZ	
Z202	2903-000181	FILTER-CERAMIC:BP,5.5MHZ	
Z204	2903-000184	FILTER-CERAMIC:BP,5.5MHZ	
Z205	2903-000202	FILTER-CERAMIC:BP,6.5MHZ	
Z206	2903-000184	FILTER-CERAMIC:BP,5.5MHZ	
Z210	2903-000200	FILTER-CERAMIC:BP,6.5MHZ	
*	HA95-900003	ASSY-PCB,A/V FRONT;73,SC1T3B,S15A	
CE01	2401-001840	C-AL:100UF,20%,16V,GP,TP8X11.5MM,5	
CE03	2401-001264	C-AL:4.7UF,20%,50V,BP6X11MM,5MM,TP	
CE06	2202-000862	C-CERAMIC,MLC-AXIAL:390PF,10%50V,Y5P,3.5X1.9TP	
CE07	2202-000222	C-CERAMIC,MLC-AXIAL:3.3NF,20%,16V,Y5P,-,7.5MM,TP	
J-PHONE	3722-000143	JACK-PHONE:1P,3.4MM,MBAG,BLACK	
J-RCA	3722-000507	JACK-RCA:2P 3.6MM;-,AG	
L-CON	AA39-20112E	LEAD-CONNECTOR,ASSY:-,YBNH025-09,67096-009,9P,300	
LE01	2701-000158	INDUCTOR-AXIAL:22 UH 10% 2.5X3.4MM	
OE01	0501-000283	TR-SMALL SIGNAL:KSA539 PNP 60V 45V 200MA 40	
RE01	2001-001153	R-CARBON(S):470HM,5%,1/2W,AA,TP,2.4X6.4MM	
RE02	2001-001153	R-CARBON(S):470HM,5%,1/2W,AA,TP,2.4X6.4MM	
RE03	2001-000010	R-CARBON(S):68KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RE04	2001-000429	R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RE05	2001-000009	R-CARBON:20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	

ASSY-PCB,A/V FRONT

REMOCON

AA59-10101QREMOCON:DP,TM59,AA59-10095W


ASSY-SPEAKER

Electric Parts List



Loc. No.	Code No.	Description ; Specification	Remark	Loc. No.	Code No.	Description ; Specification	Remark
----------	----------	-----------------------------	--------	----------	----------	-----------------------------	--------

SPK	3001-000003	SPEAKER:3W,16OHM,88DB,180HZ					
L-CON	AA39-20500C	LEAD-CONNECTOR,ASSY:67096-003,REC,3(2),600,1007#					

ASSY-POWER,CORD

 P/CORD	AA96-20077B	ASSY-POWER,CORD:SCT11D					
--	-------------	------------------------	--	--	--	--	--

ASSY-CRT


 CRT	AA03-10031D	CRT-COLOR:-,A48ECR141X,+400MG,20,90DEG					
 D-YOKE	AA27-50005H	DEFLECTION-YOKE:-,DSE-2093BL,20/A48ECR141X,ST					
S-DY	AA63-60028A	SPACER-DY:NEOPRENE,-,BLK,V0 W12,-,-					

ASSY-ACCESSORY

		BUYER : SEH (ONLY)					
M-USE	AA68-11261A	MANUAL-USERS:S15A,ENGLISH,W/O TTX,B5,W/P 10					
		BUYER : SEKO (ONLY)					
	AA26-90001C	TRANS-MATCHING:-,300OHM/75OHM,PAL,40-890					
	AA42-10001D	ANT-ROD:DP,4S,620MM,SUS,UL/CS					
	AA68-11289A	MANUAL-USERS:S15A,N-RUSSIA,W/O TTX,B5					




8. Block Diagram

8-1 S15A

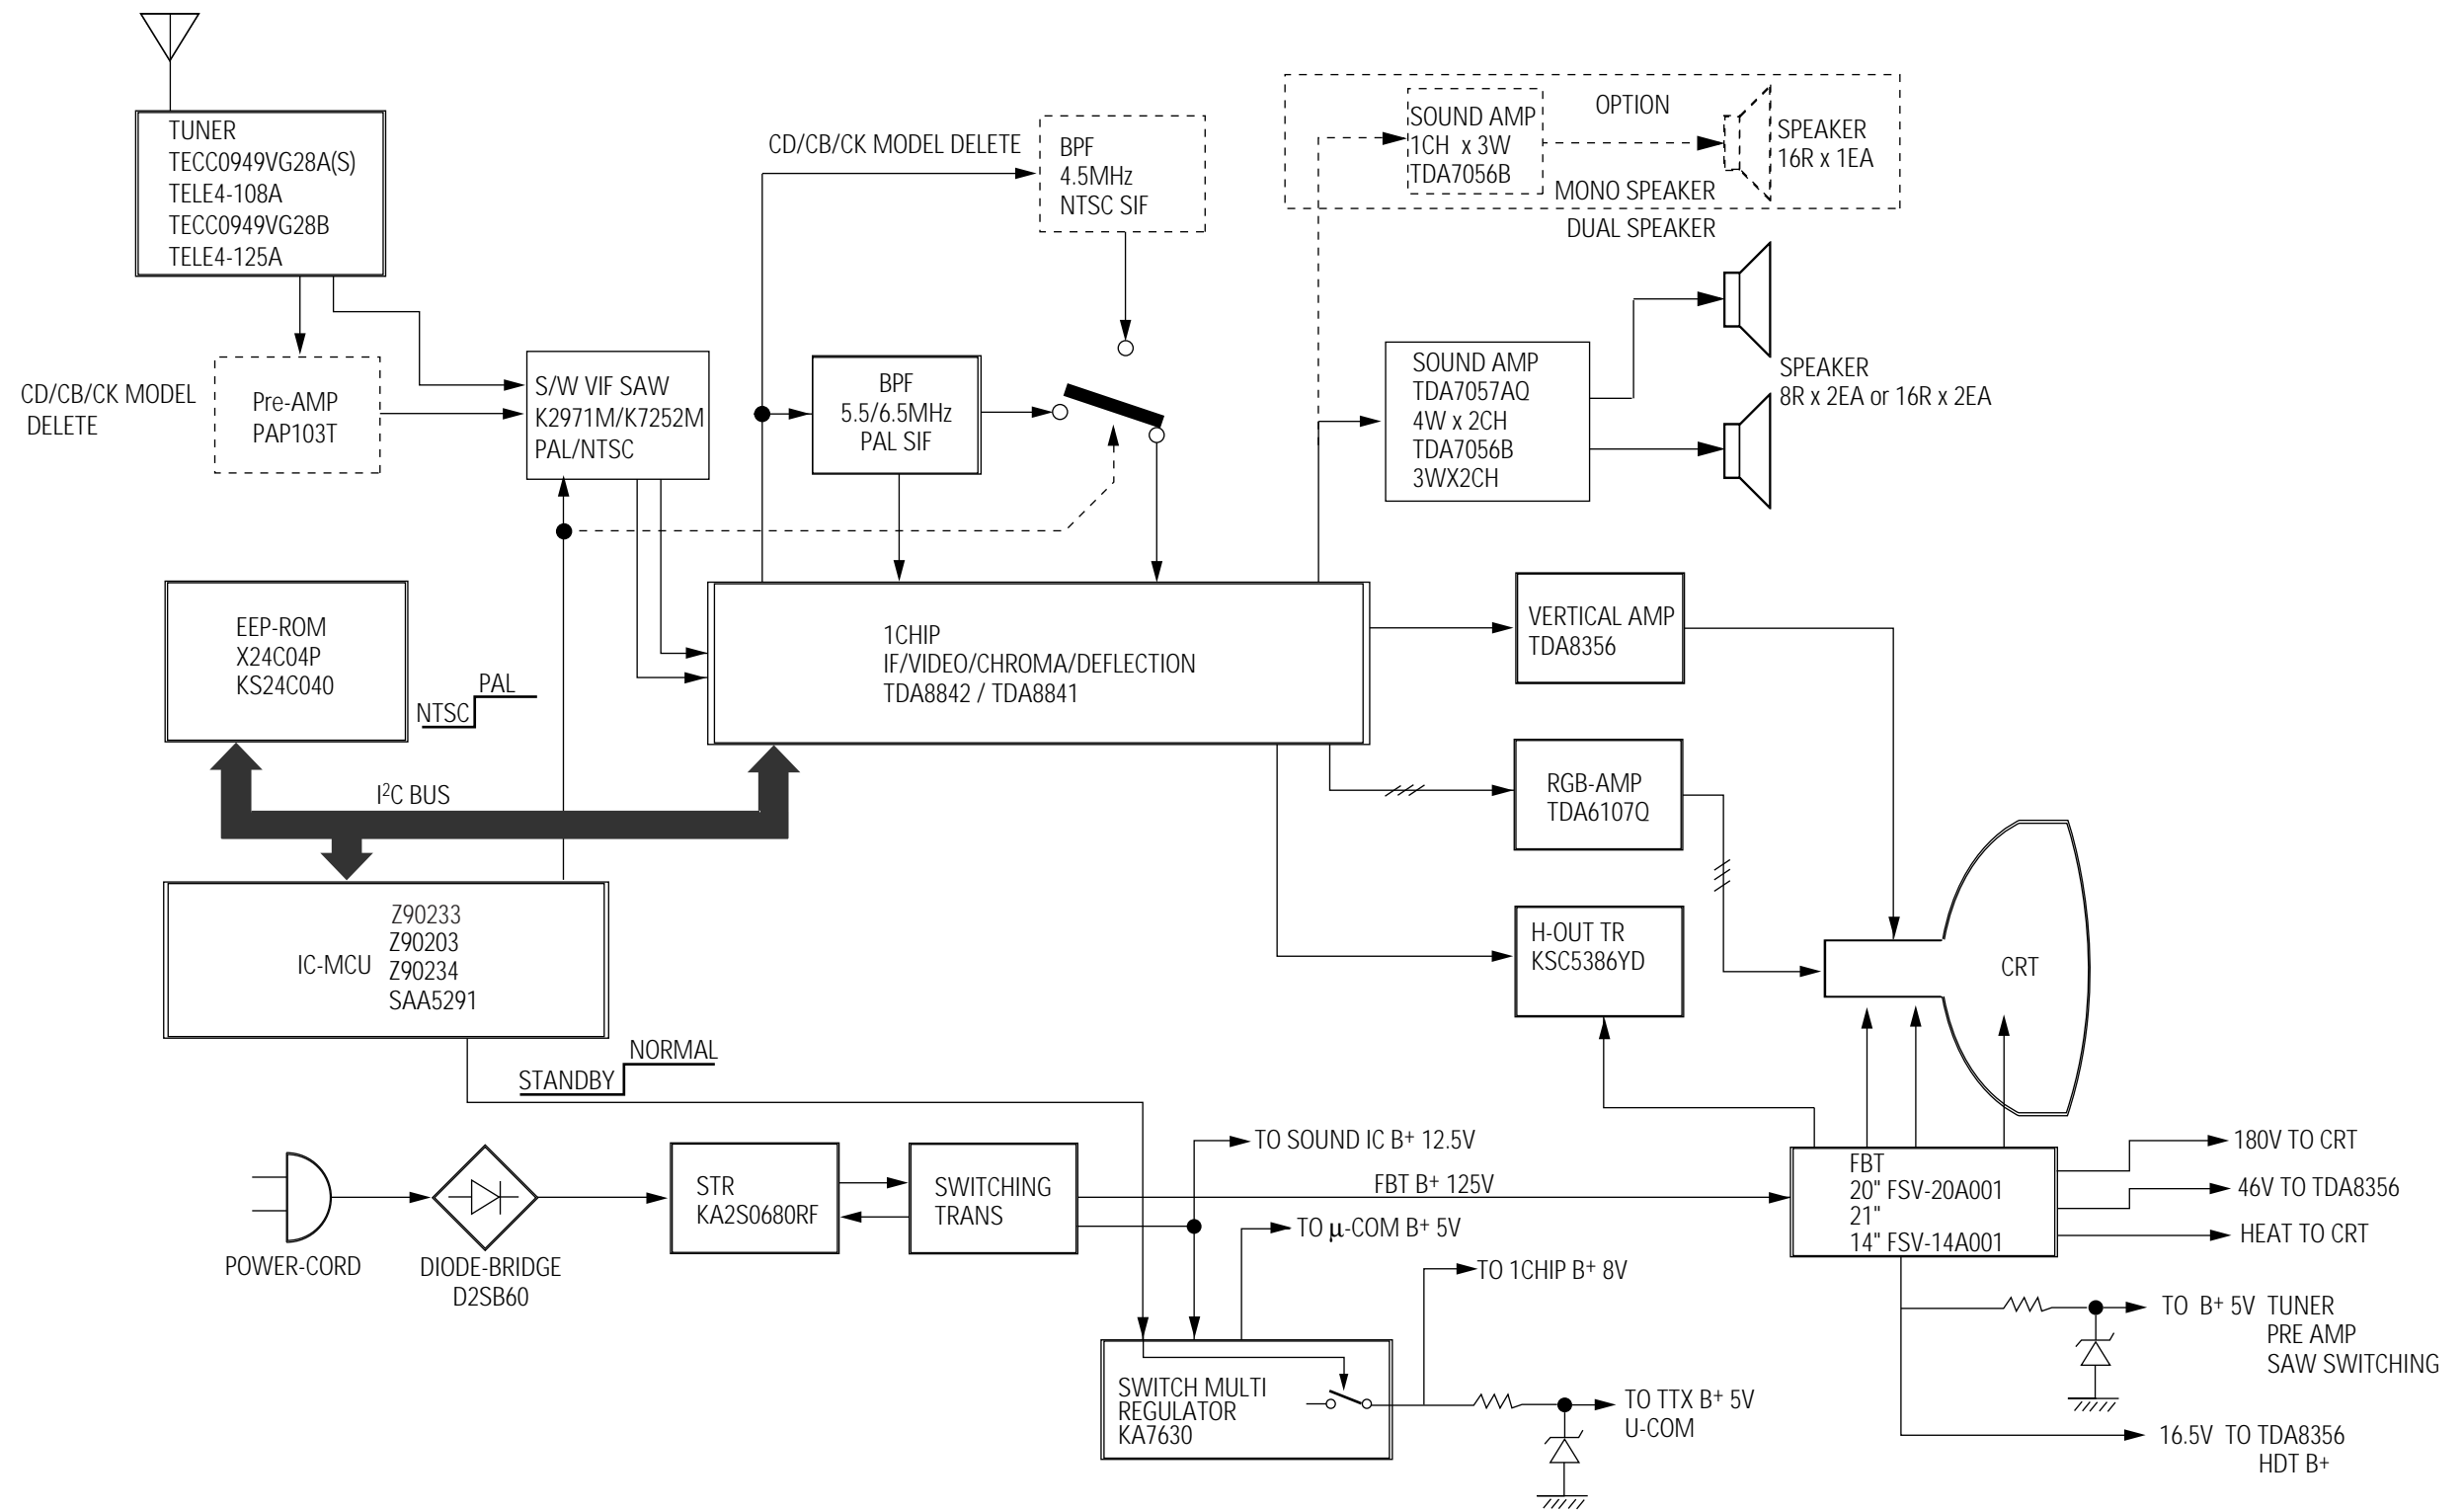

10. PCB Layout


10-1 PCB Main

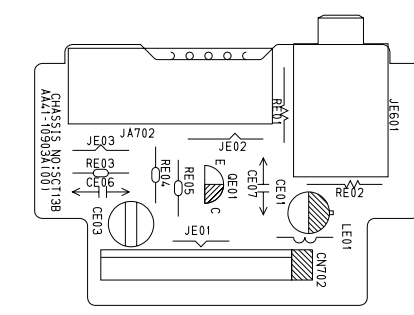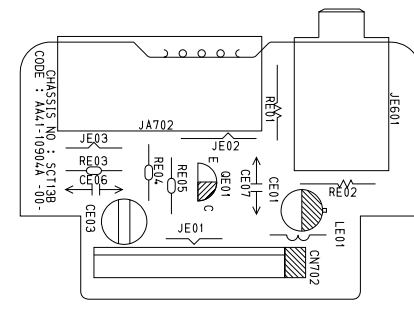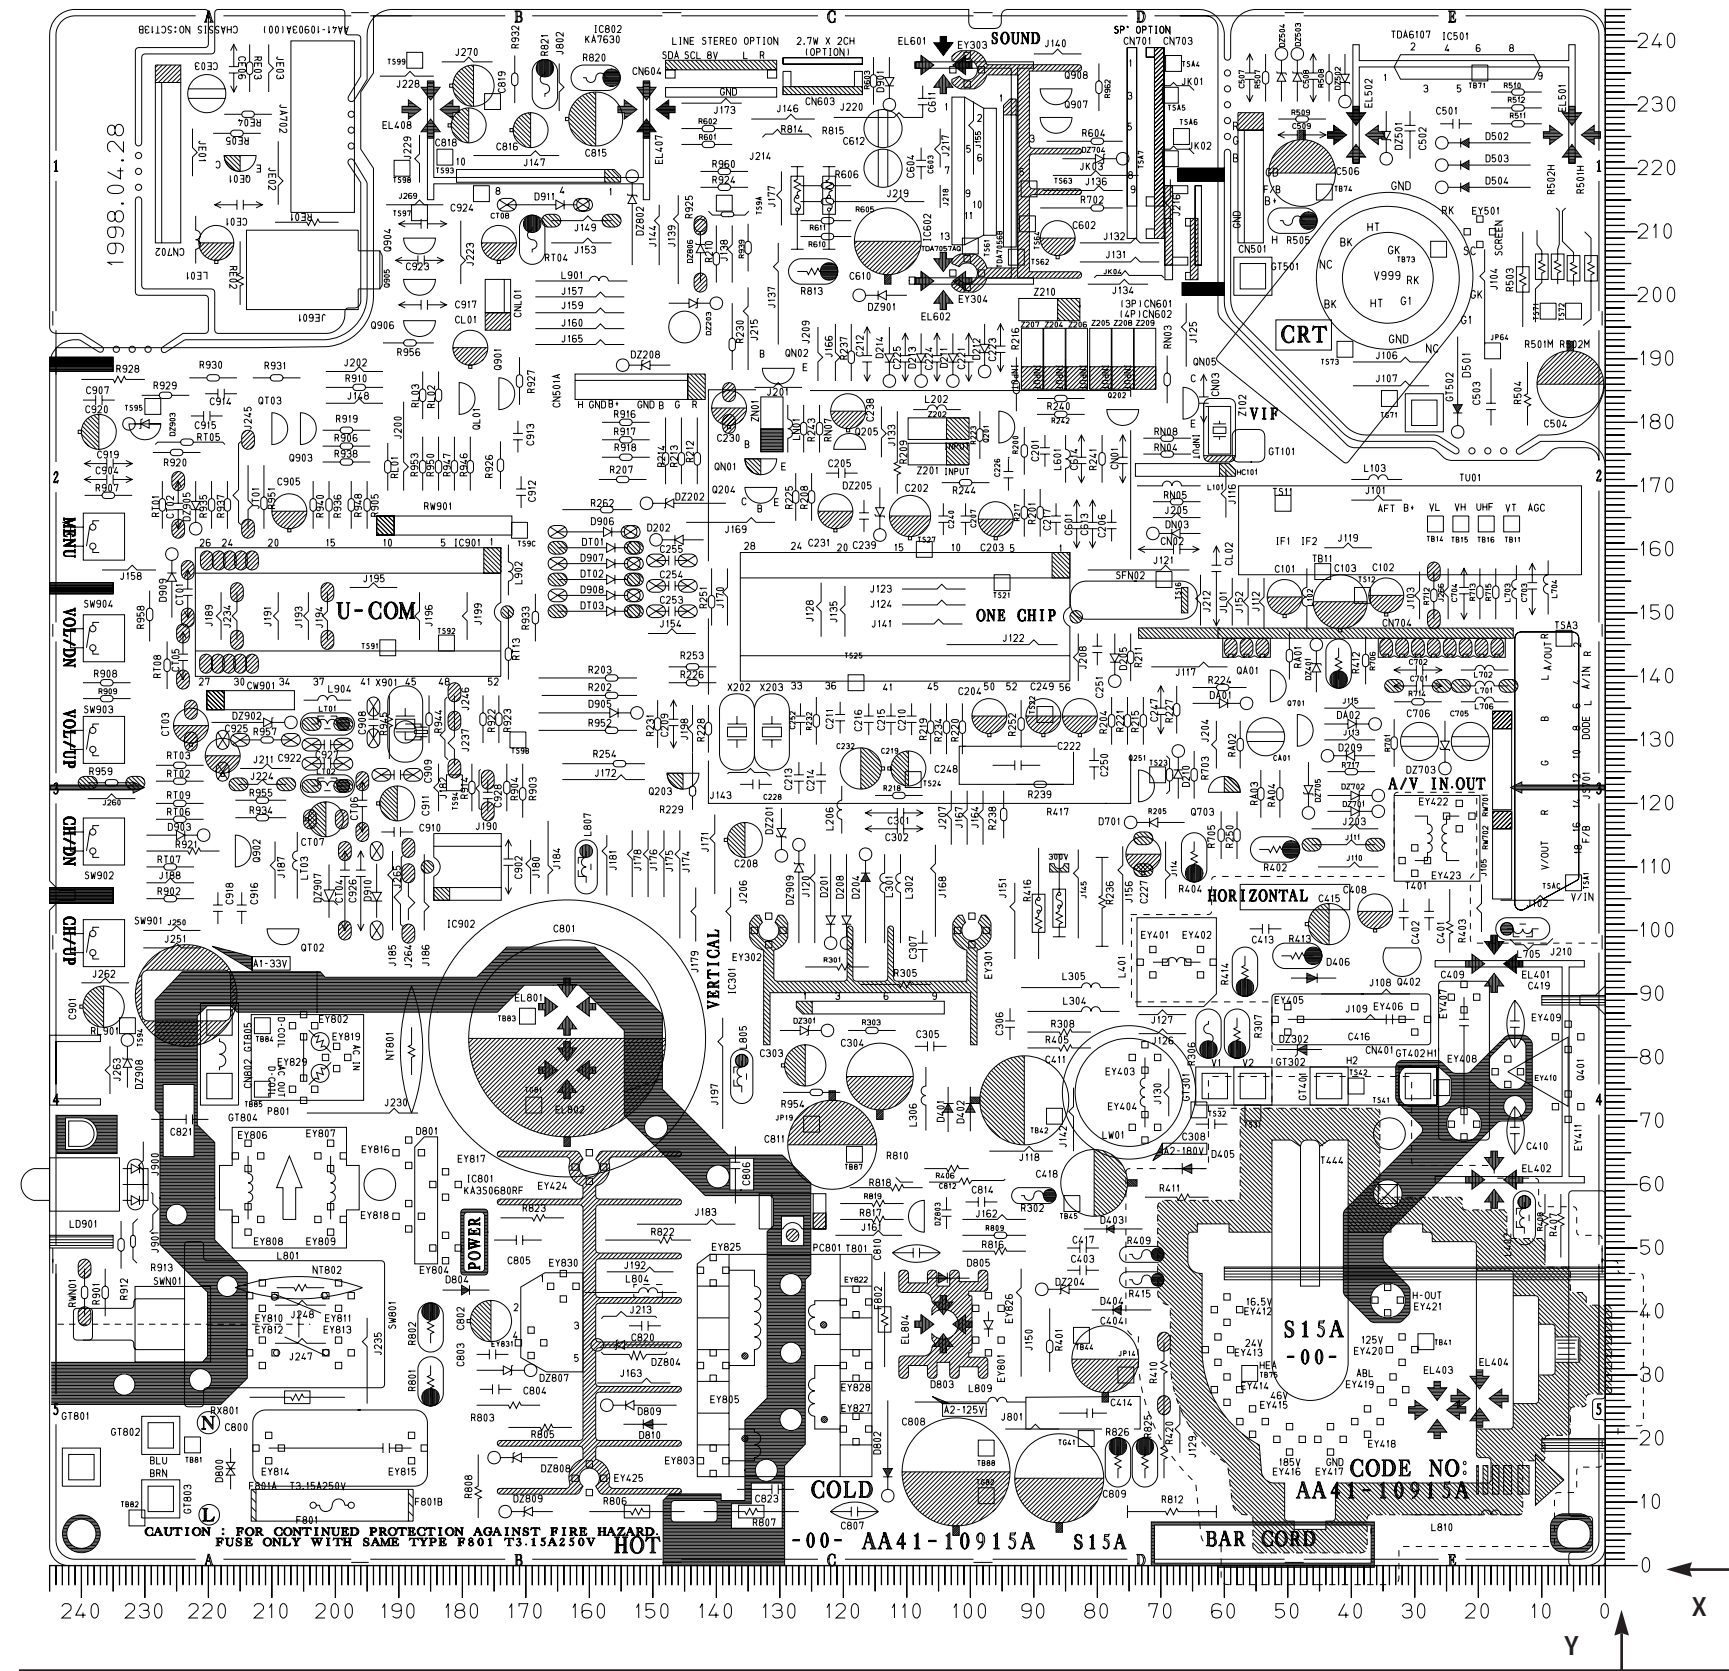

Loc. No.	X	Y	Loc. No.	X	Y
DIODE					
D201	122	98	DZ705	46	118
D202	149	161	DZ802	153	218
D204	116	112	DZ803	107	57
D205	77	139	DZ804	158	34
D208	119	98	DZ806	142	211
D209	43	127	DZ807	169	30
D210	67	128	DZ808	175	17
D211	102	186	DZ809	173	8
D212	97	188	DZ901	117	200
D213	107	186	DZ902	207	132
D214	112	186	DZ903	232	179
D401	103	78	DZ905	222	163
D402	100	78	DZ907	201	100
D403	84	53	DZ908	232	82
D404	83	40	DZ909	127	113
D405	72	62	IC		
D406	39	92	HC101	59	172
D501	23	178	IC201	86	141
D502	25	224	IC301	99	100
D503	25	220	IC501	39	225
D504	25	217	IC602	100	235
D701	74	117	IC801	160	13
D800	216	19	IC802	151	229
D801	188	65	IC901	175	142
D802	113	11	IC902	183	114
D803	104	38	TRANSISTOR		
D805	97	45	Q201	95	176
D809	157	25	Q202	78	182
D810	157	22	Q203	147	124
D901	112	230	Q204	135	169
D903	220	115	Q205	116	175
D905	152	134	Q251	73	120
D906	153	162	Q401	17	94
D907	153	157	Q402	34	95
D908	153	152	Q701	48	129
D909	225	159	Q703	57	121
D910	193	100	Q901	174	182
D911	161	214	Q902	215	110
DA01	56	135	Q903	205	176
DA02	36	132	Q904	189	209
DN03	71	162	Q905	189	202
DT01	153	160	Q906	189	196
DT02	153	155	Q907	89	228
DT03	153	150	Q908	89	232
DZ201	129	111	QA01	52	136
DZ202	151	167	QE01	217	222
DZ203	140	198	QL01	180	181
DZ204	88	43	QN01	135	174
DZ205	114	162	QN02	132	188
DZ208	154	189	ON05	66	180
DZ301	122	84	OT02	210	100
DZ302	54	81	OT03	210	176
DZ401	45	145			
DZ501	34	221			
DZ502	41	230			
DZ503	48	238			
DZ504	51	238			
DZ701	35	118			
DZ702	35	121			
DZ703	25	125			
DZ704	76	221			

10. Wiring Diagram

10-1 S15A

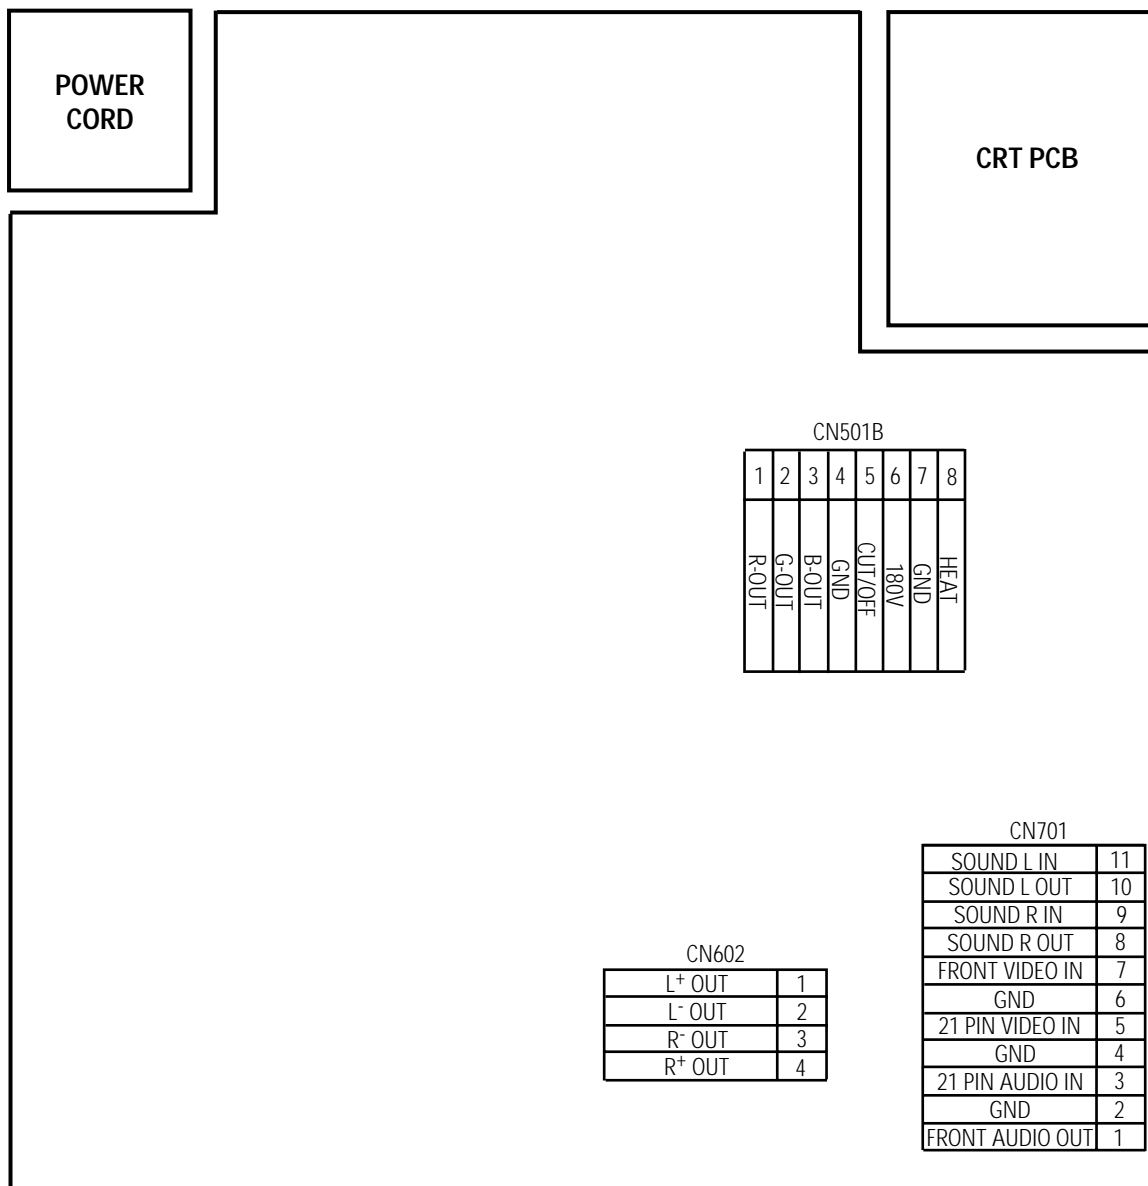

CN501B

1	2	3	4	5	6	7	8
R-OUT	G-OUT	B-OUT	GND	CUT/OFF	180V	GND	HEAT

CN602



L ⁺ OUT	1
L ⁻ OUT	2
R ⁻ OUT	3
R ⁺ OUT	4


CN701

SOUND L IN	11
SOUND L OUT	10
SOUND R IN	9
SOUND R OUT	8
FRONT VIDEO IN	7
GND	6
21 PIN VIDEO IN	5
GND	4
21 PIN AUDIO IN	3
GND	2
FRONT AUDIO OUT	1

11. Schematic Diagrams


11-1 ONECHIP

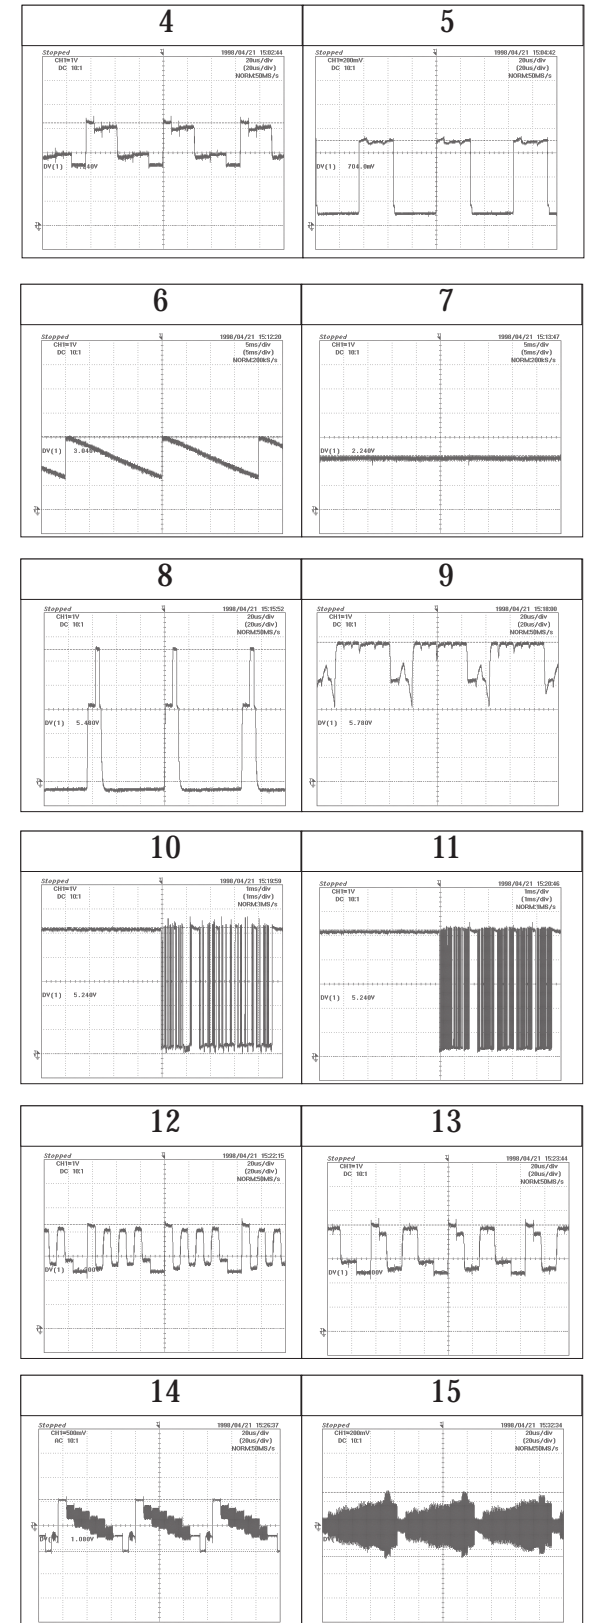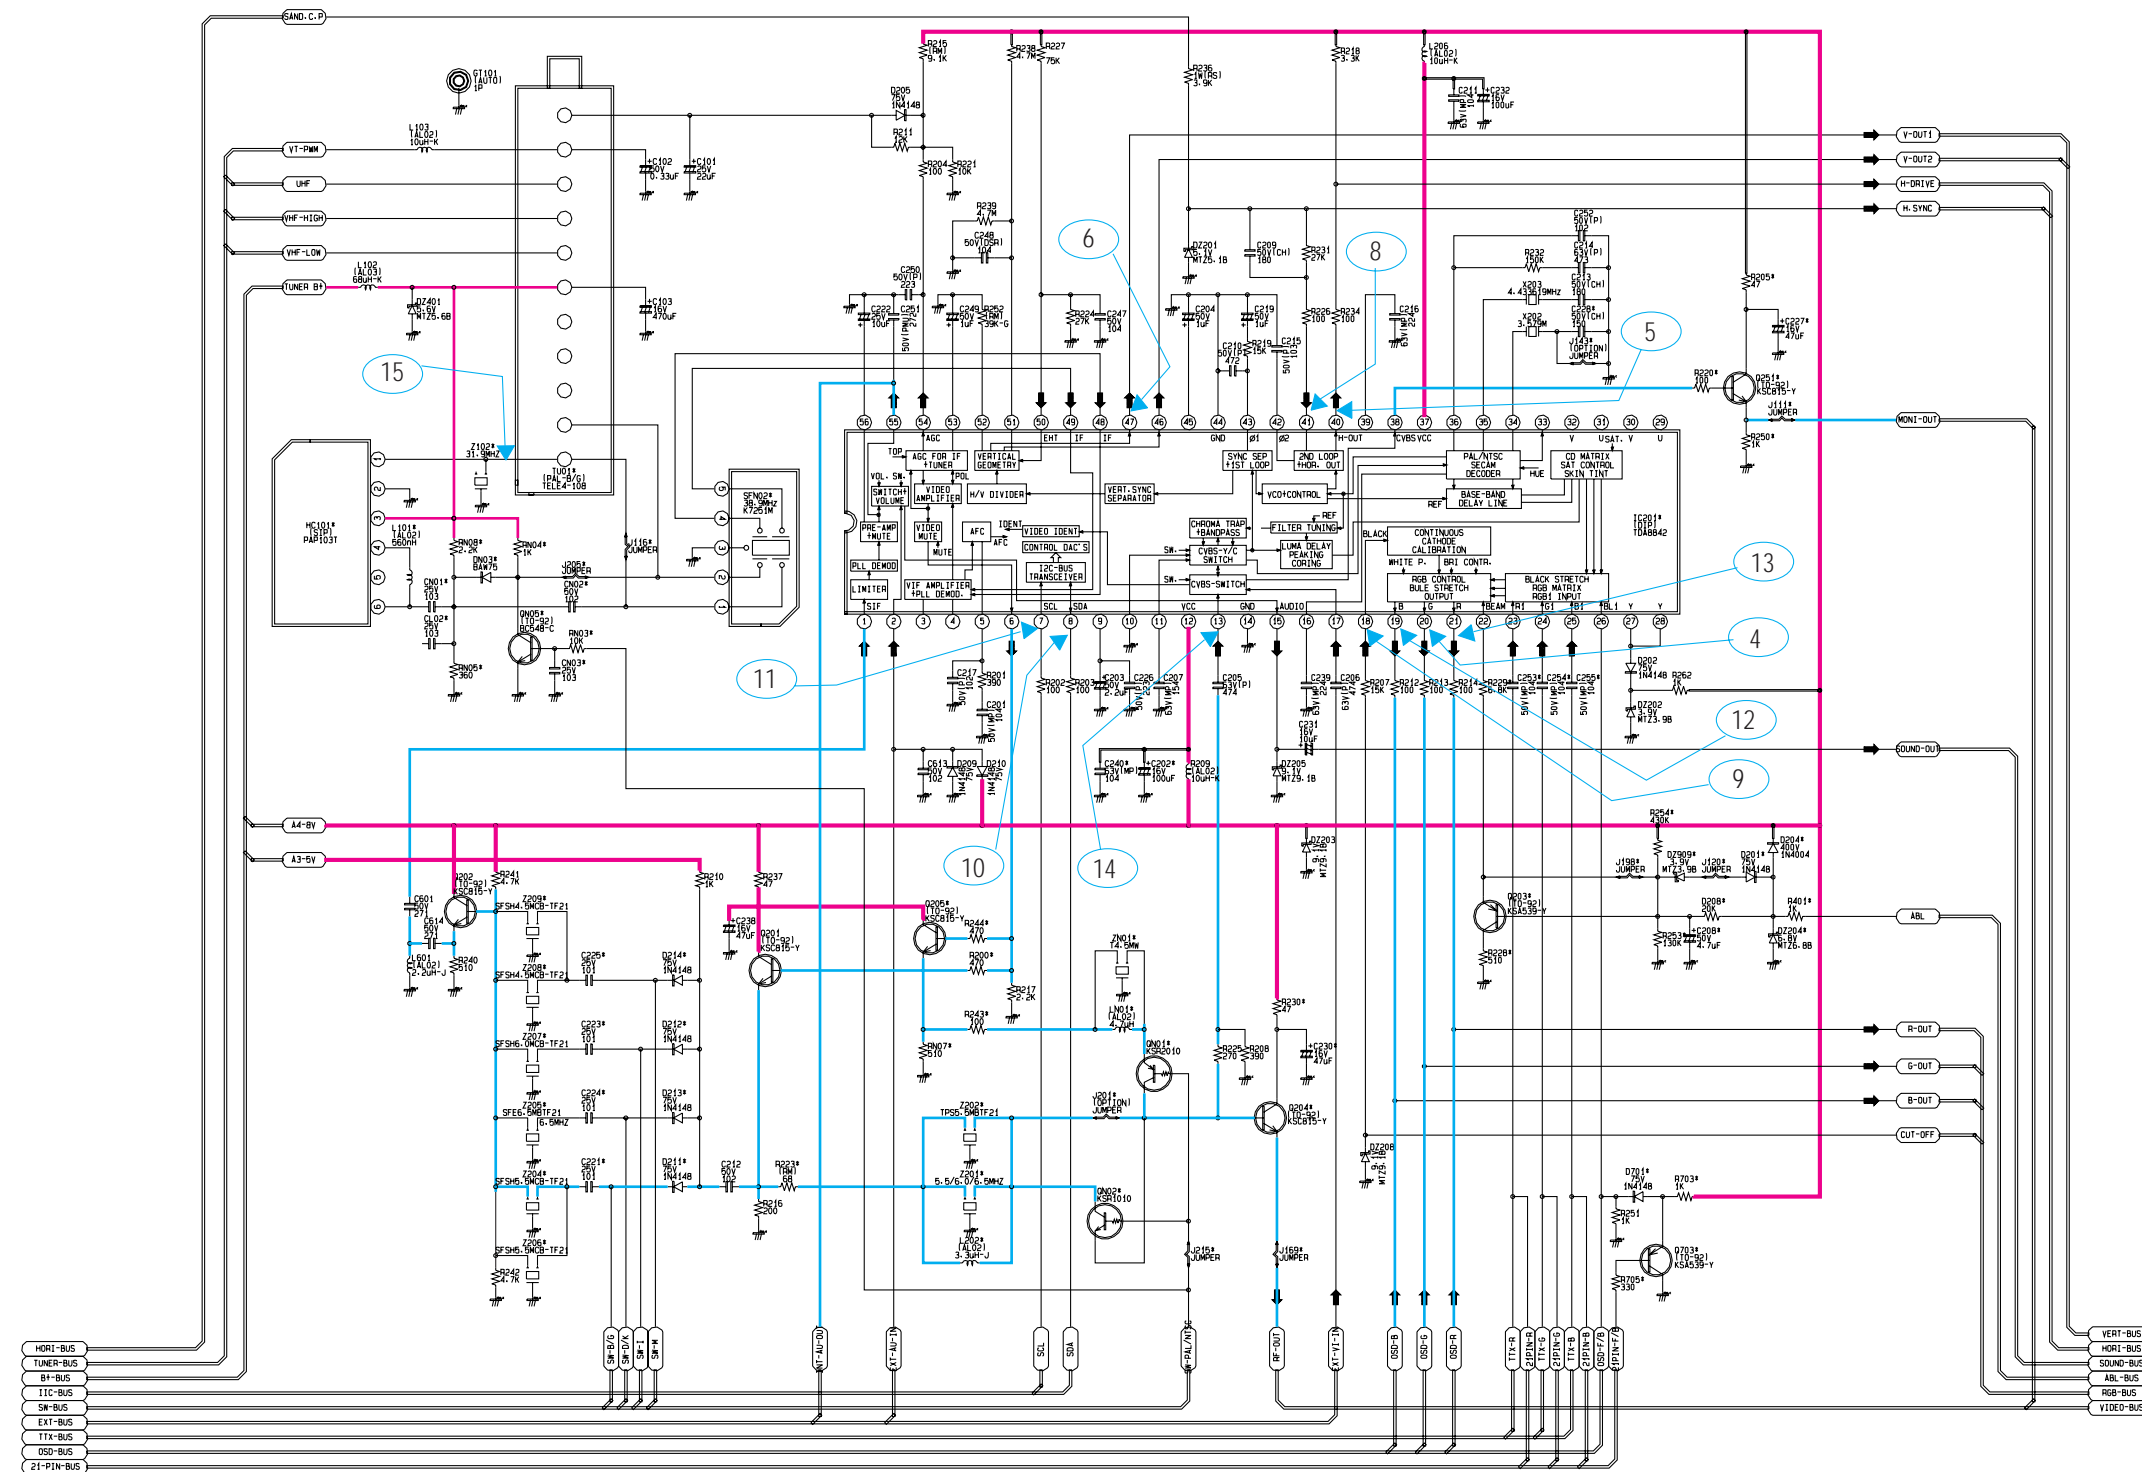







Schematic Diagrams

11-2 SOUND, EXT-A/V (Europe/Africa)

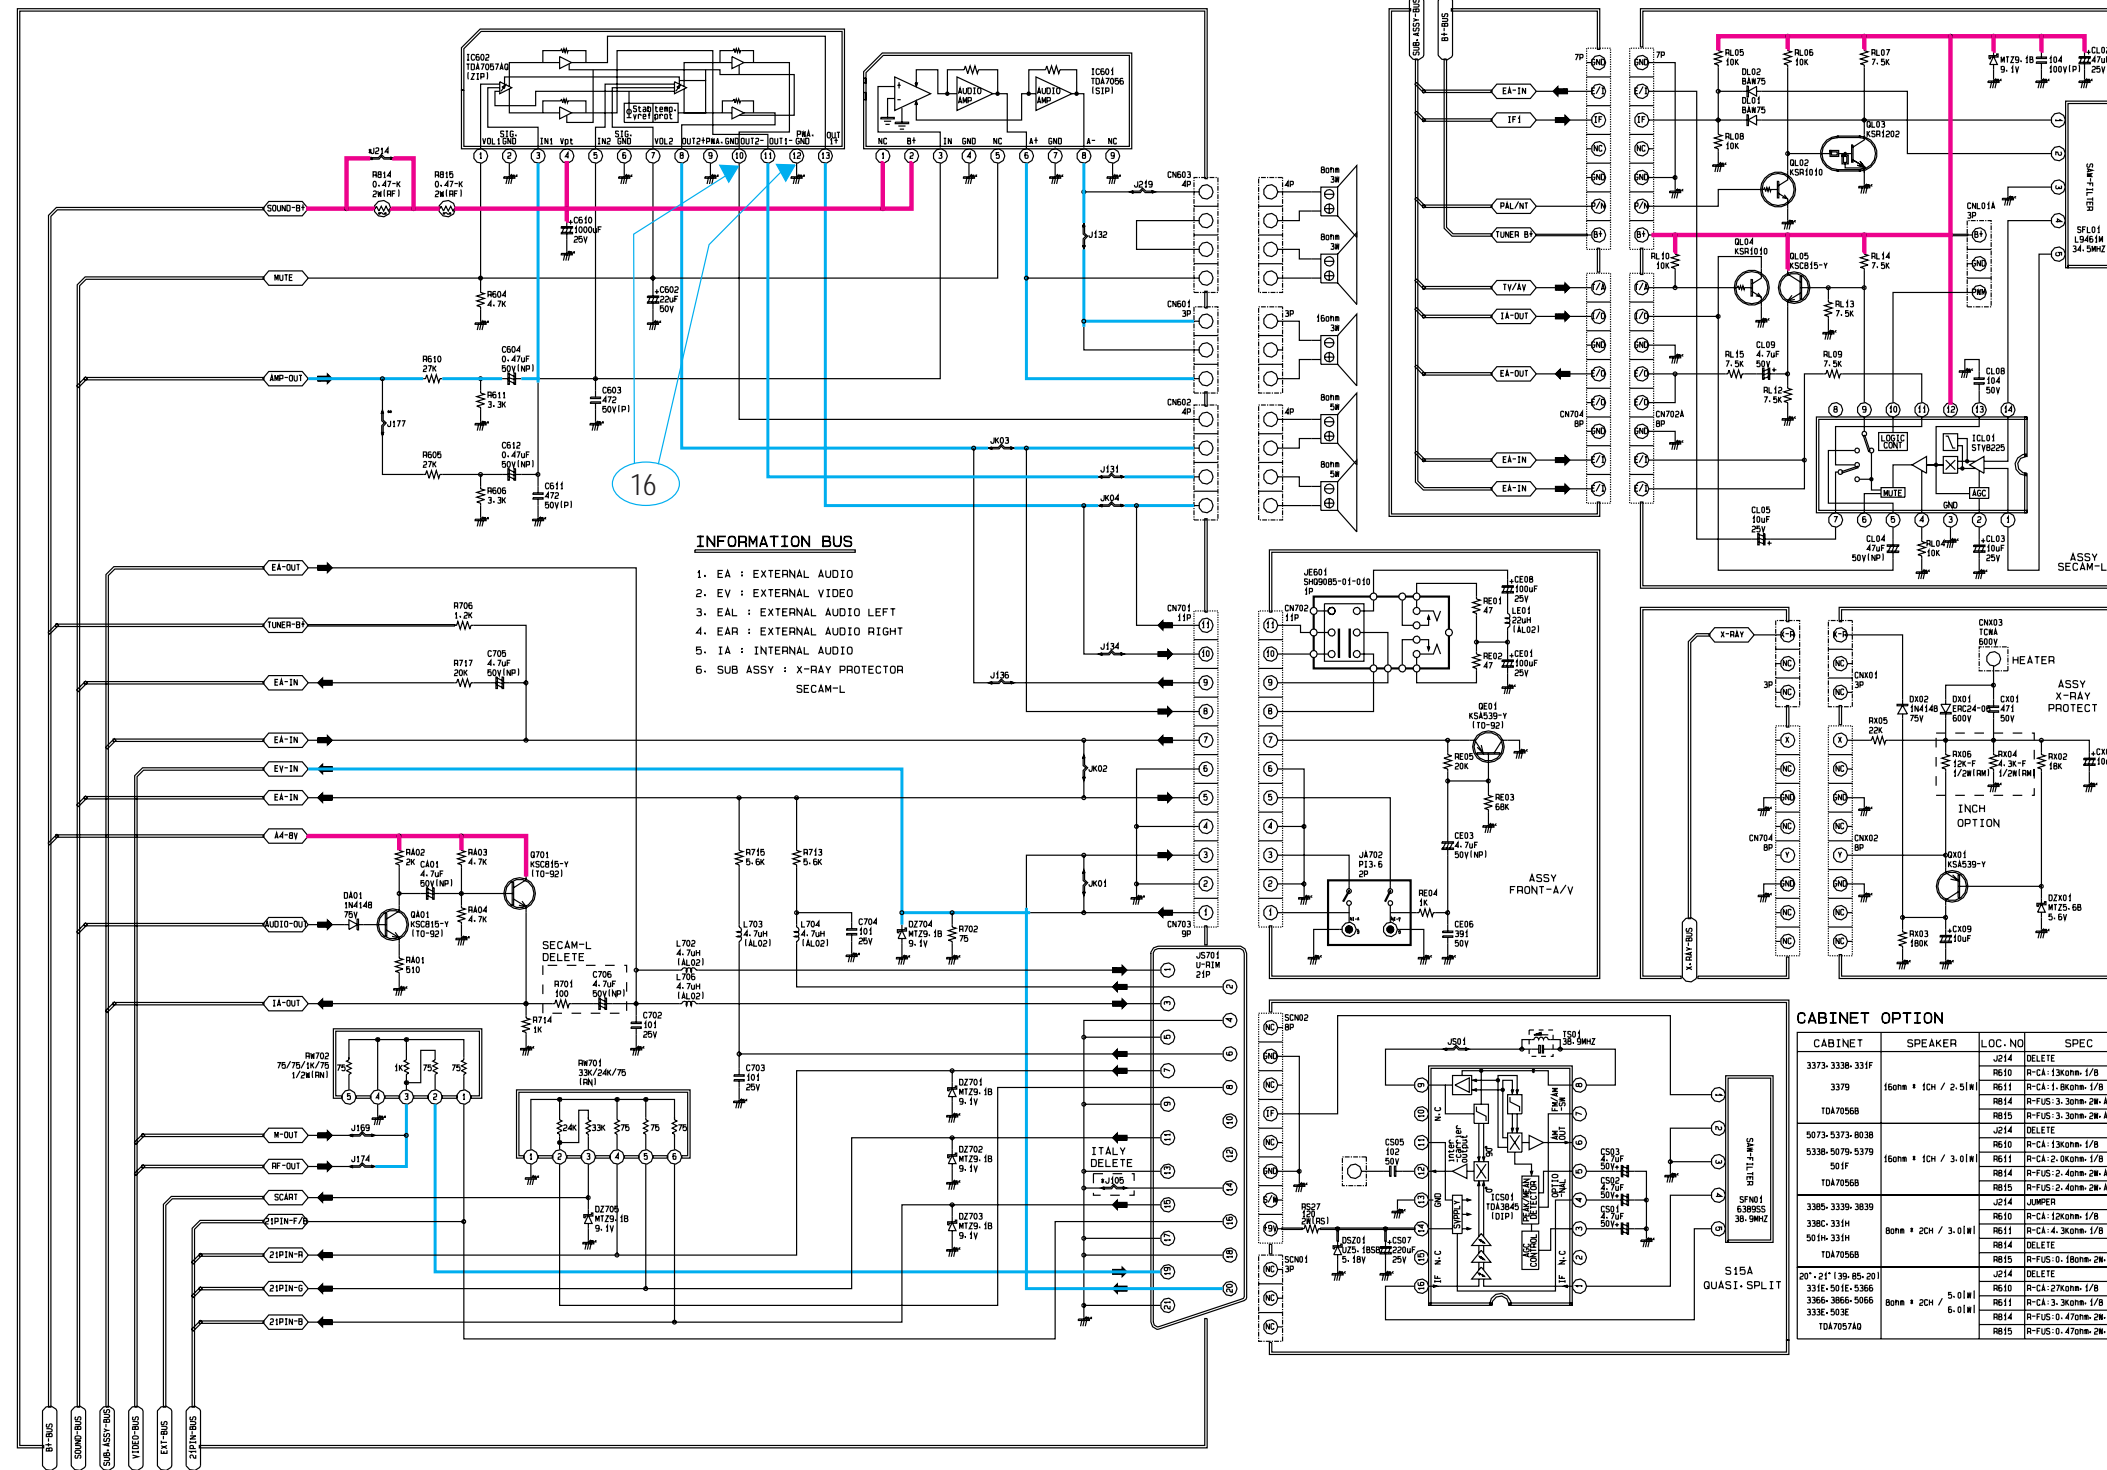


INFORMATION BUS

- EA : EXTERNAL AUDIO
- EV : EXTERNAL VIDEO
- EAL : EXTERNAL AUDIO LEFT
- EAR : EXTERNAL AUDIO RIGHT
- IA : INTERNAL AUDIO
- SUB ASSY : X-RAY PROTECTOR SECAM-L

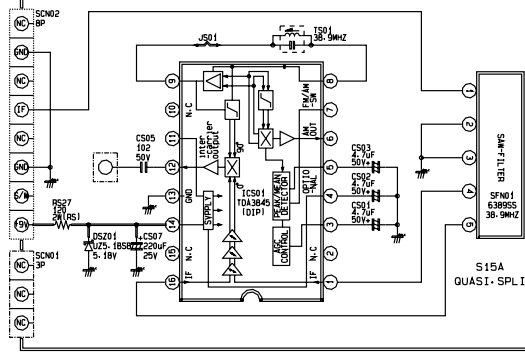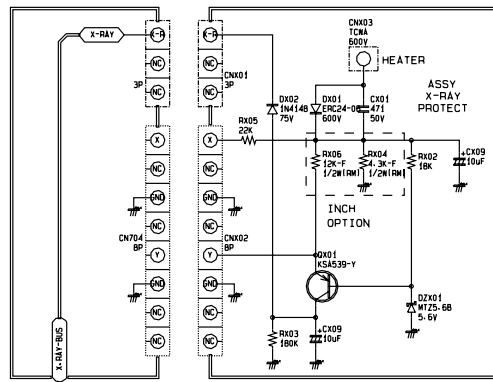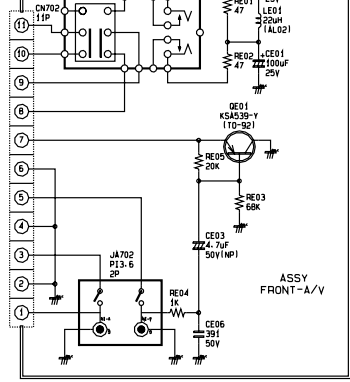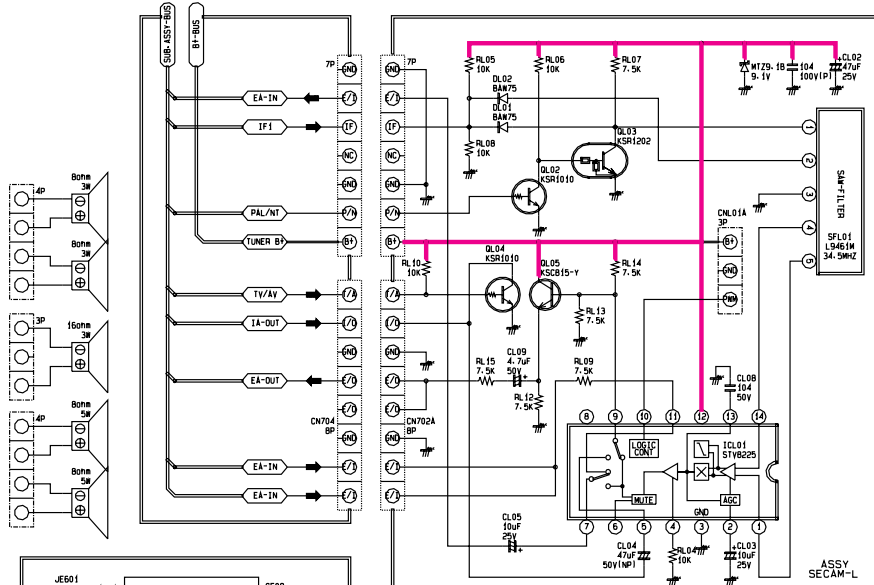






CABINET OPTION

CABINET	SPEAKER	LOC. NO	SPEC
3373-3338-331F		J214	DELETE
		R610	R-CA: 1.3k Ω 1/8
3379	16 Ω \times 1CH / 2.5"	R611	R-CA: 1.8k Ω 1/8
		R614	R-FUS: 3.3 Ω 2W-2A
		R615	R-FUS: 3.3 Ω 2W-2A
5073-5373-8038		J214	DELETE
5338-5078-5378		R610	R-CA: 1.3k Ω 1/8
501F	16 Ω \times 1CH / 3.0"	R611	R-CA: 2.0k Ω 1/8
		R614	R-FUS: 2.4 Ω 2W-2A
		R615	R-FUS: 2.4 Ω 2W-2A
3385-3339-3839		J214	JUMPER
338C-331H		R610	R-CA: 1.2k Ω 1/8
501H-331H		R611	R-CA: 4.3k Ω 1/8
		R614	DELETE
		R615	R-FUS: 0.18 Ω 2W-2A
20"-21" (19"-20")		J214	DELETE
331E-501E-536E		R610	R-CA: 2.7k Ω 1/8
336E-386E-506E		R611	R-CA: 3.3k Ω 1/8
333E-503E	8 Ω \times 2CH / 5.0"	R614	R-FUS: 0.47 Ω 2W-2A
		R615	R-FUS: 0.47 Ω 2W-2A




— : Power Line
 — : Signal Line

11-3 SOUND, EXT-A/V (Middle East / Asia)





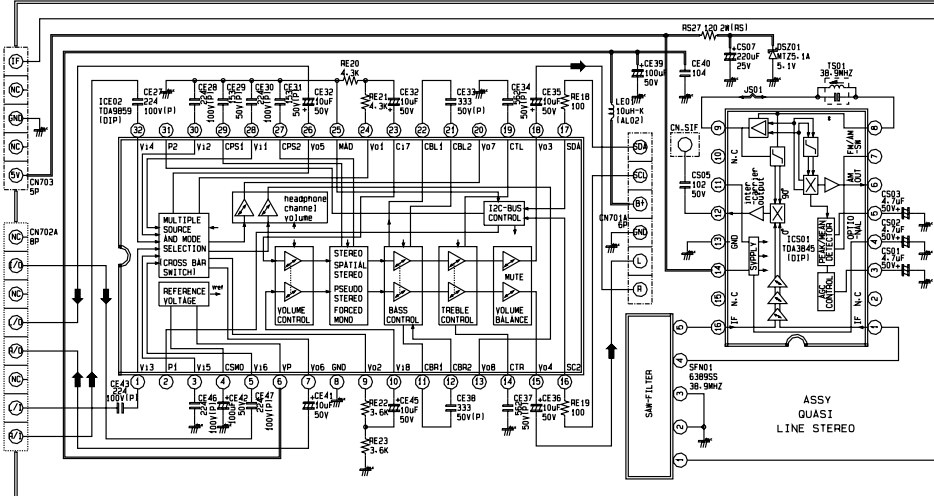
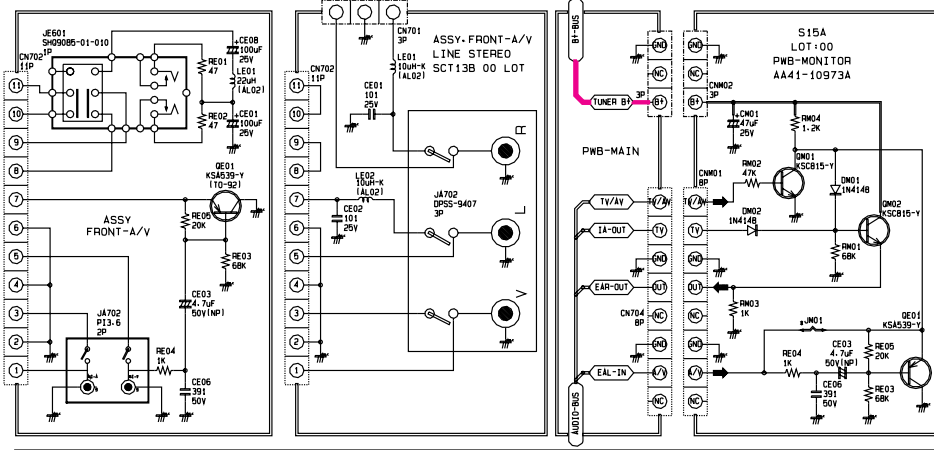
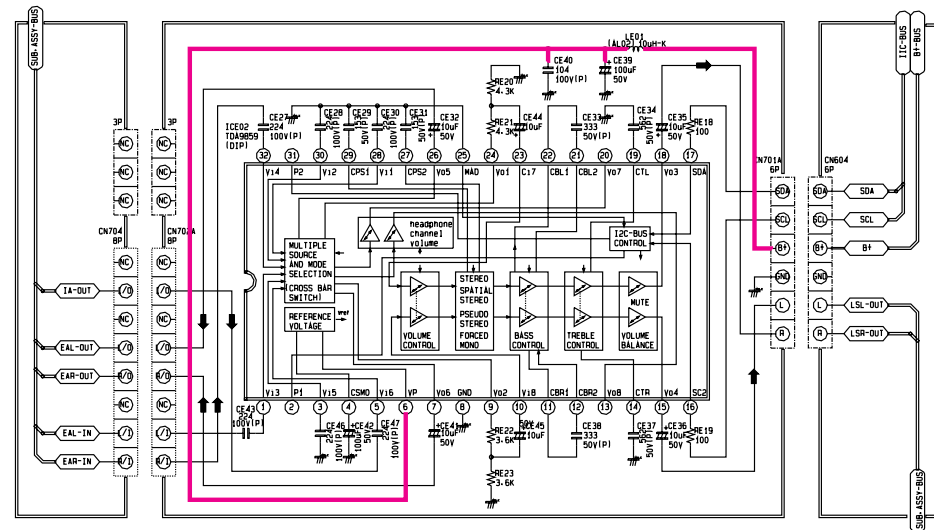
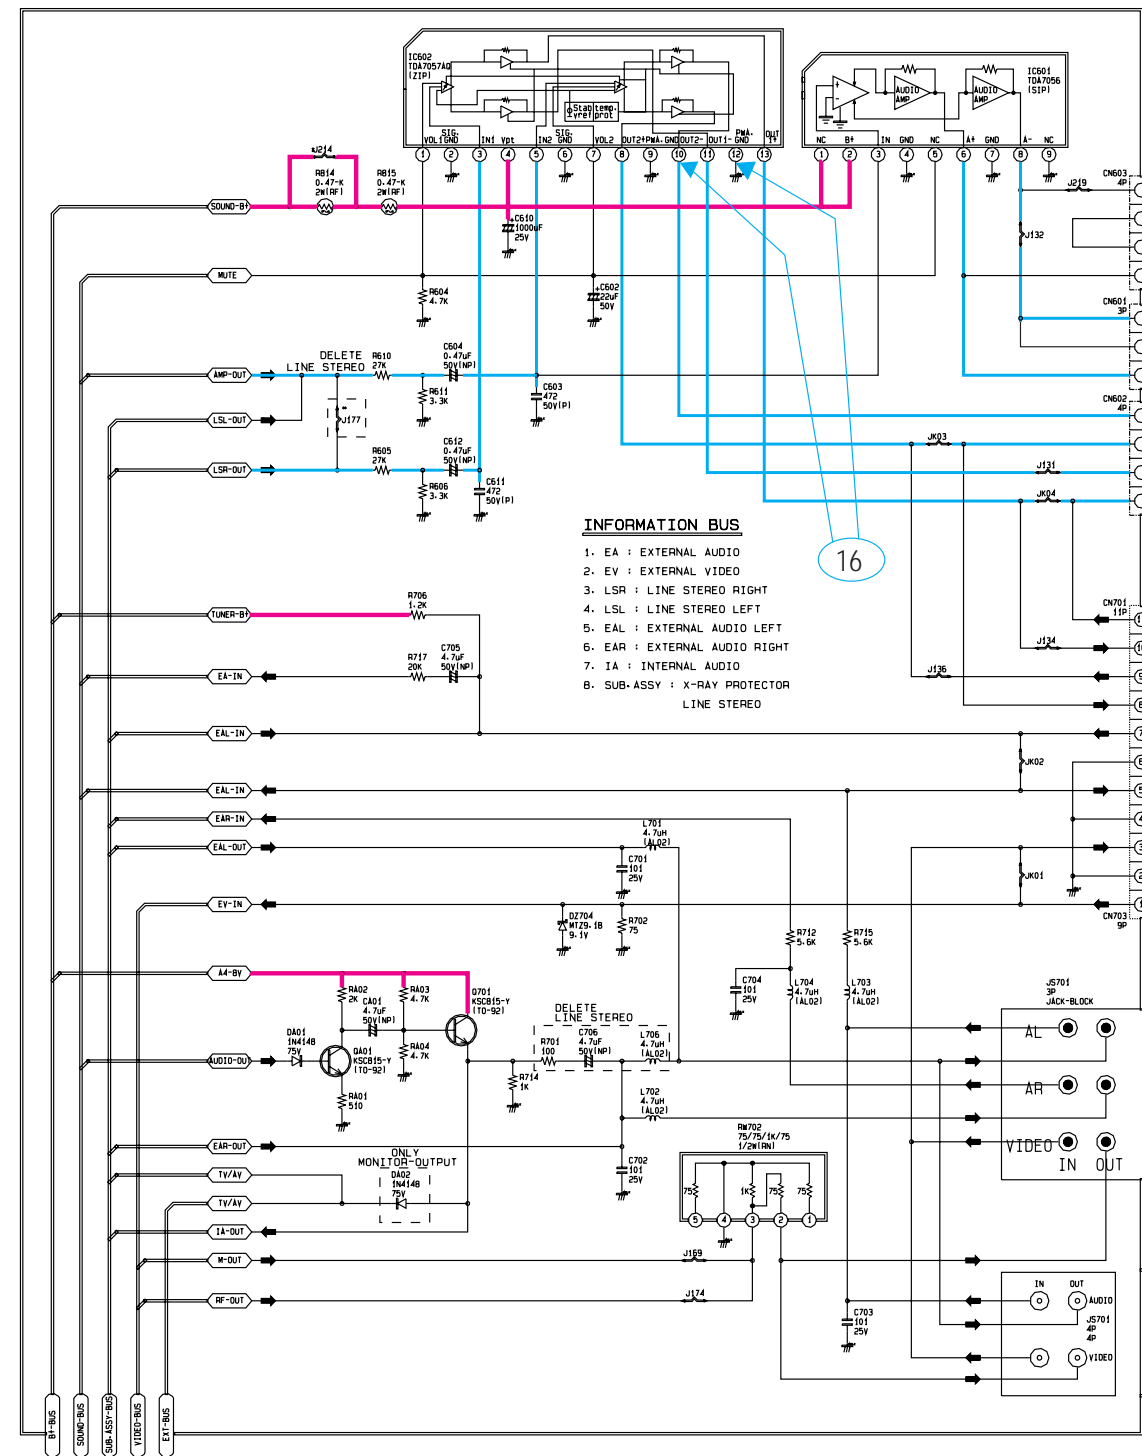


— : Power Line
— : Signal Line




Schematic Diagrams





11-4 POWER / CRT / VERTICAL / HORIZONTAL

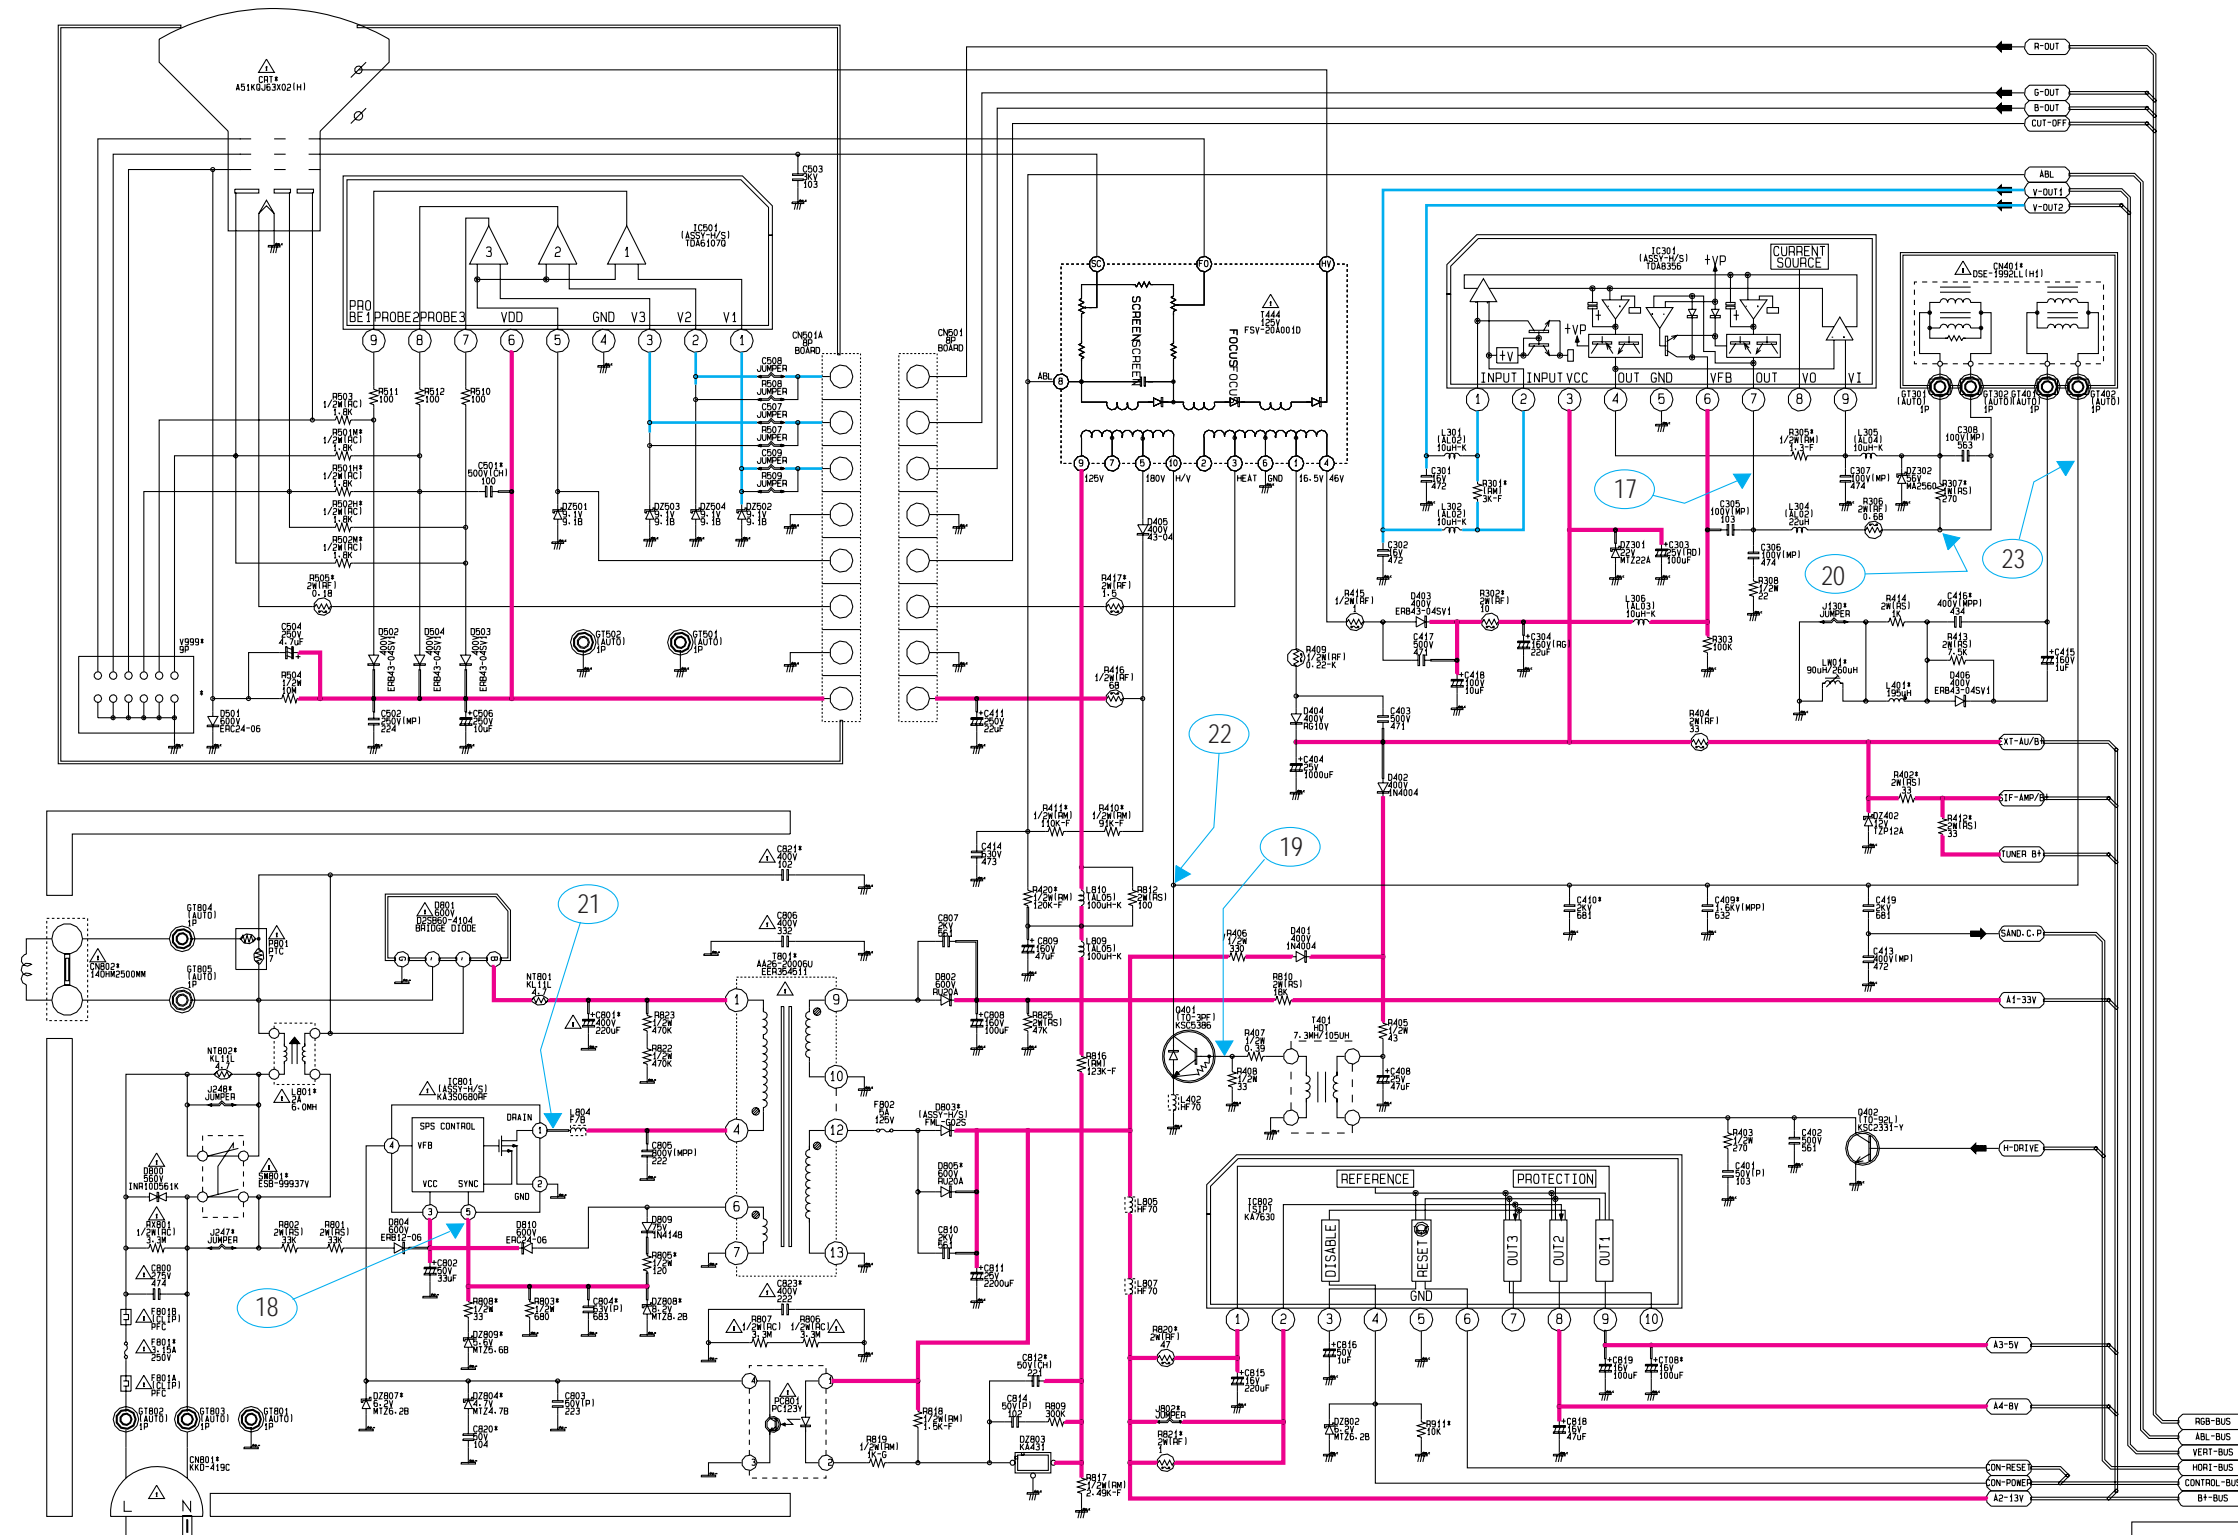


— : Power Line
 — : Signal Line



11-5 MICOM (TTX)




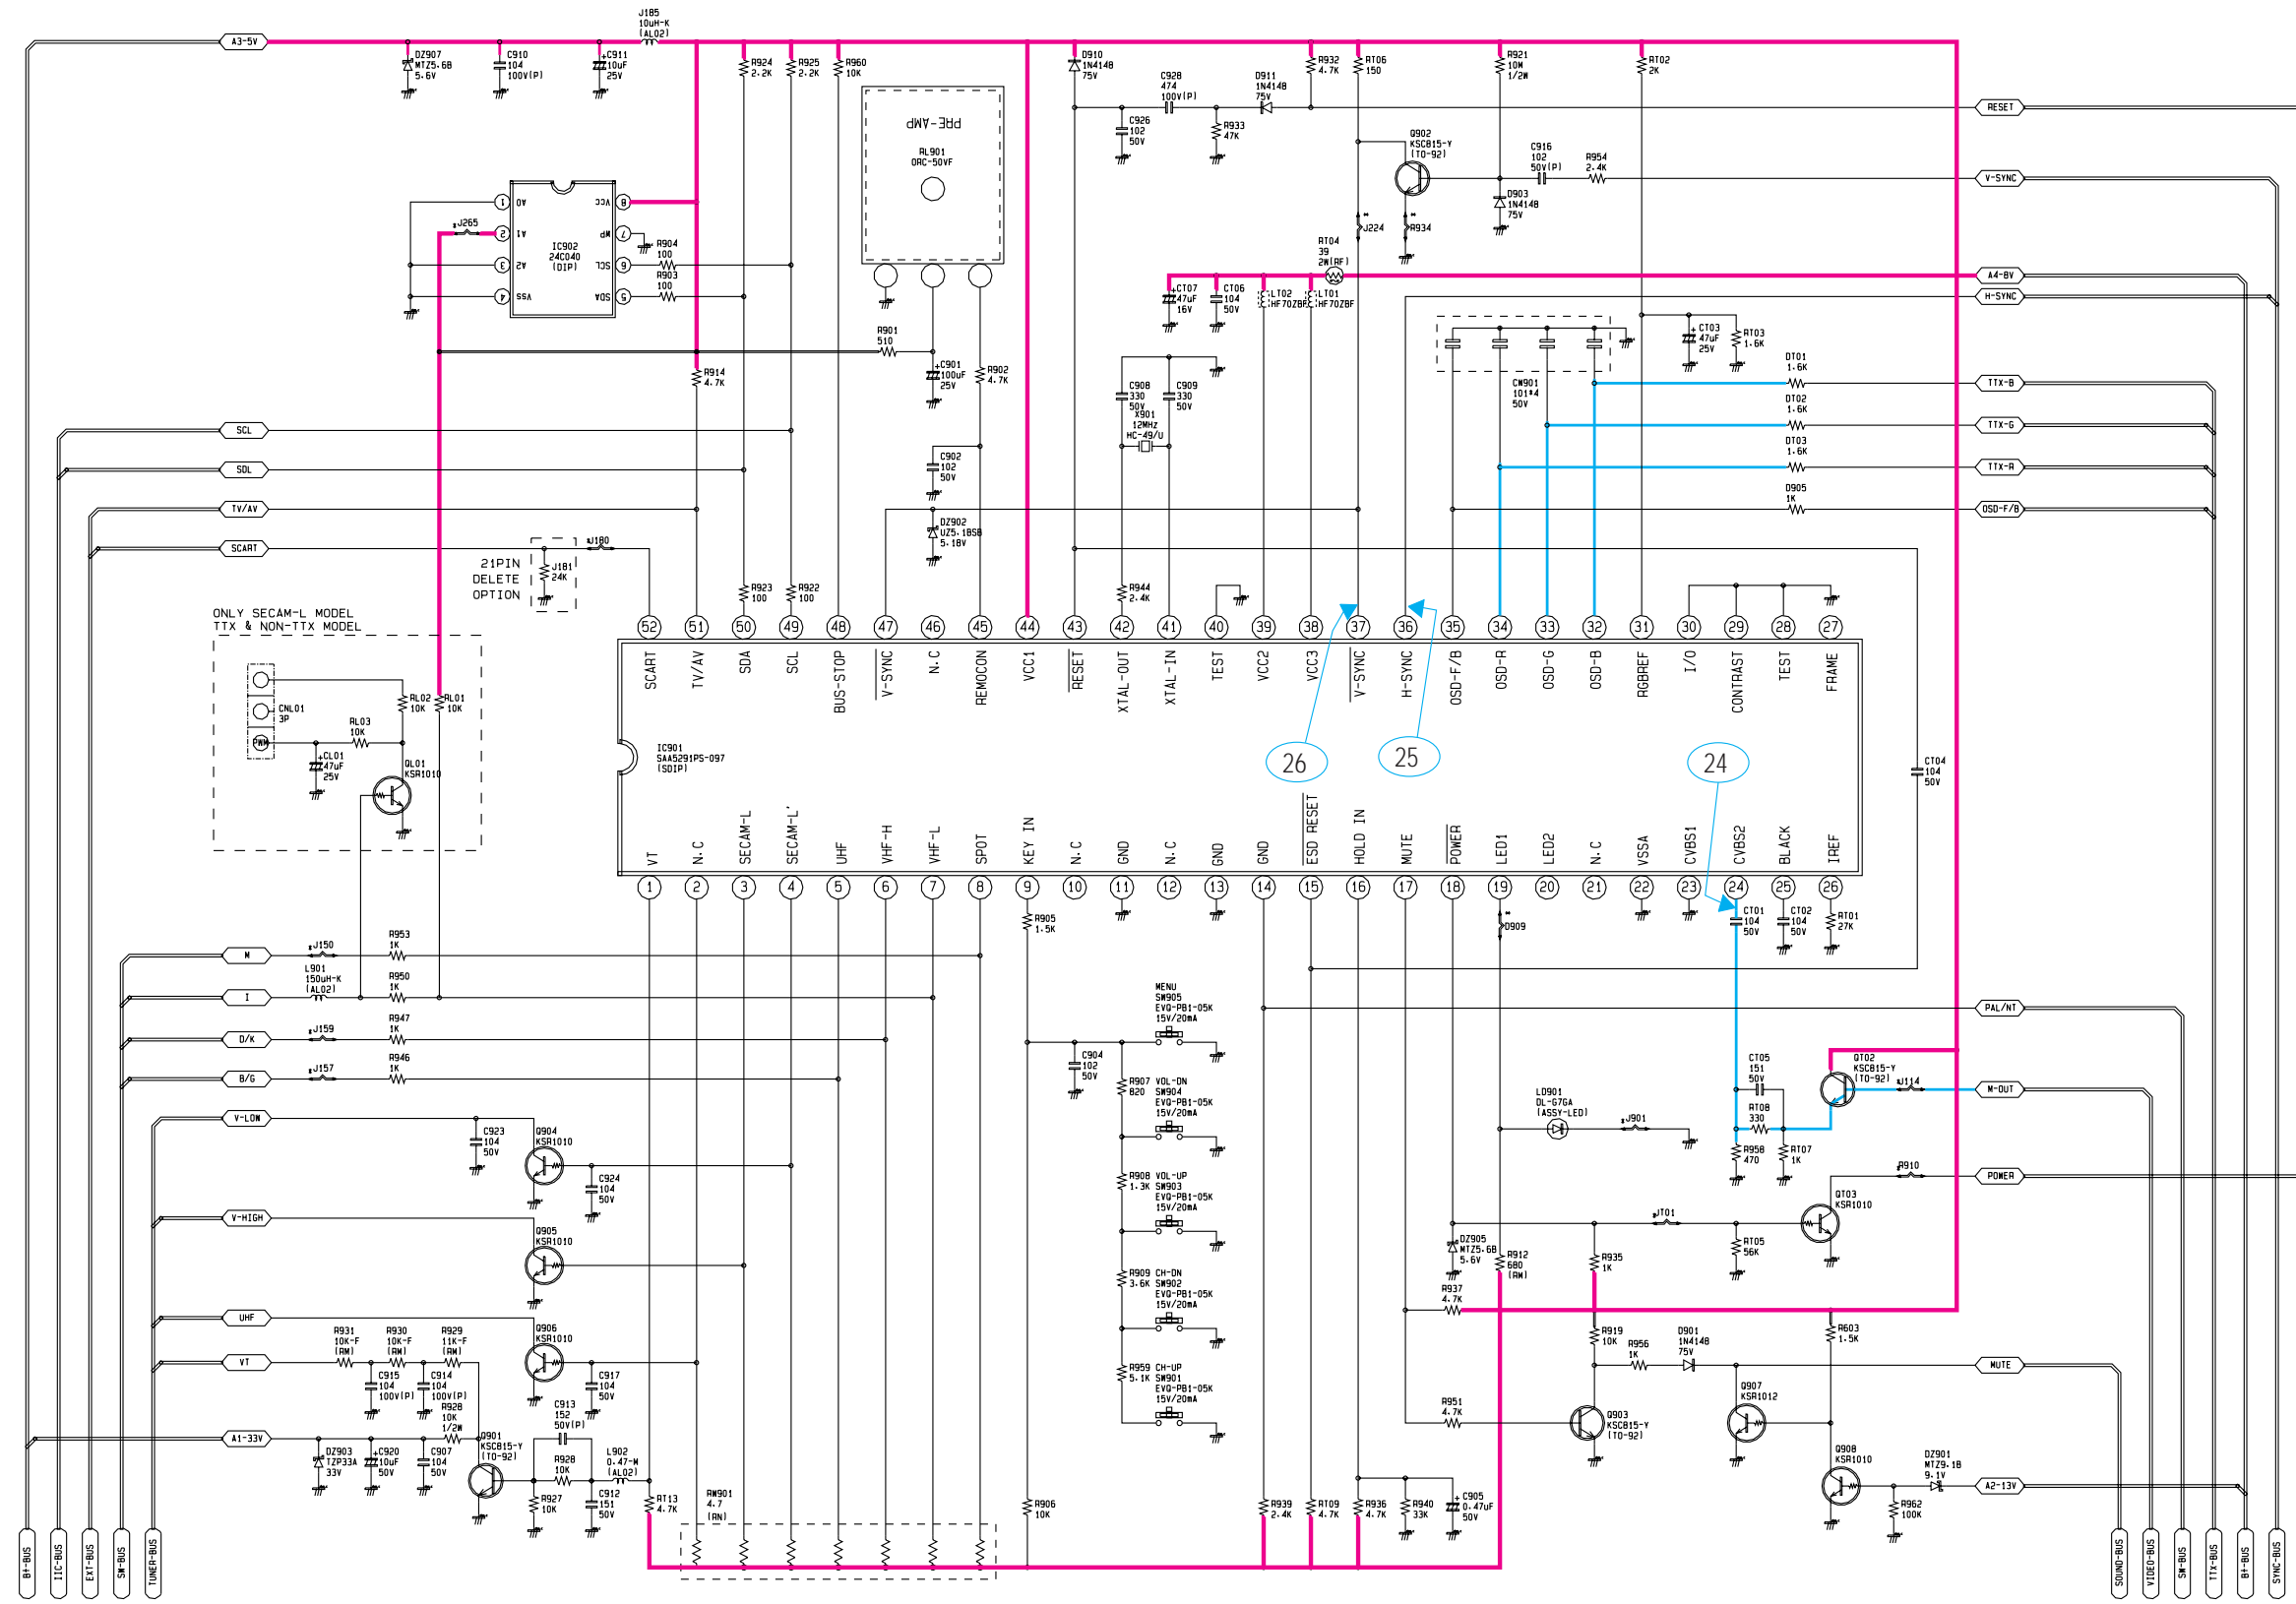


— : Power Line
 — : Signal Line



Schematic Diagrams

11-6 MICOM (NON-TTX)

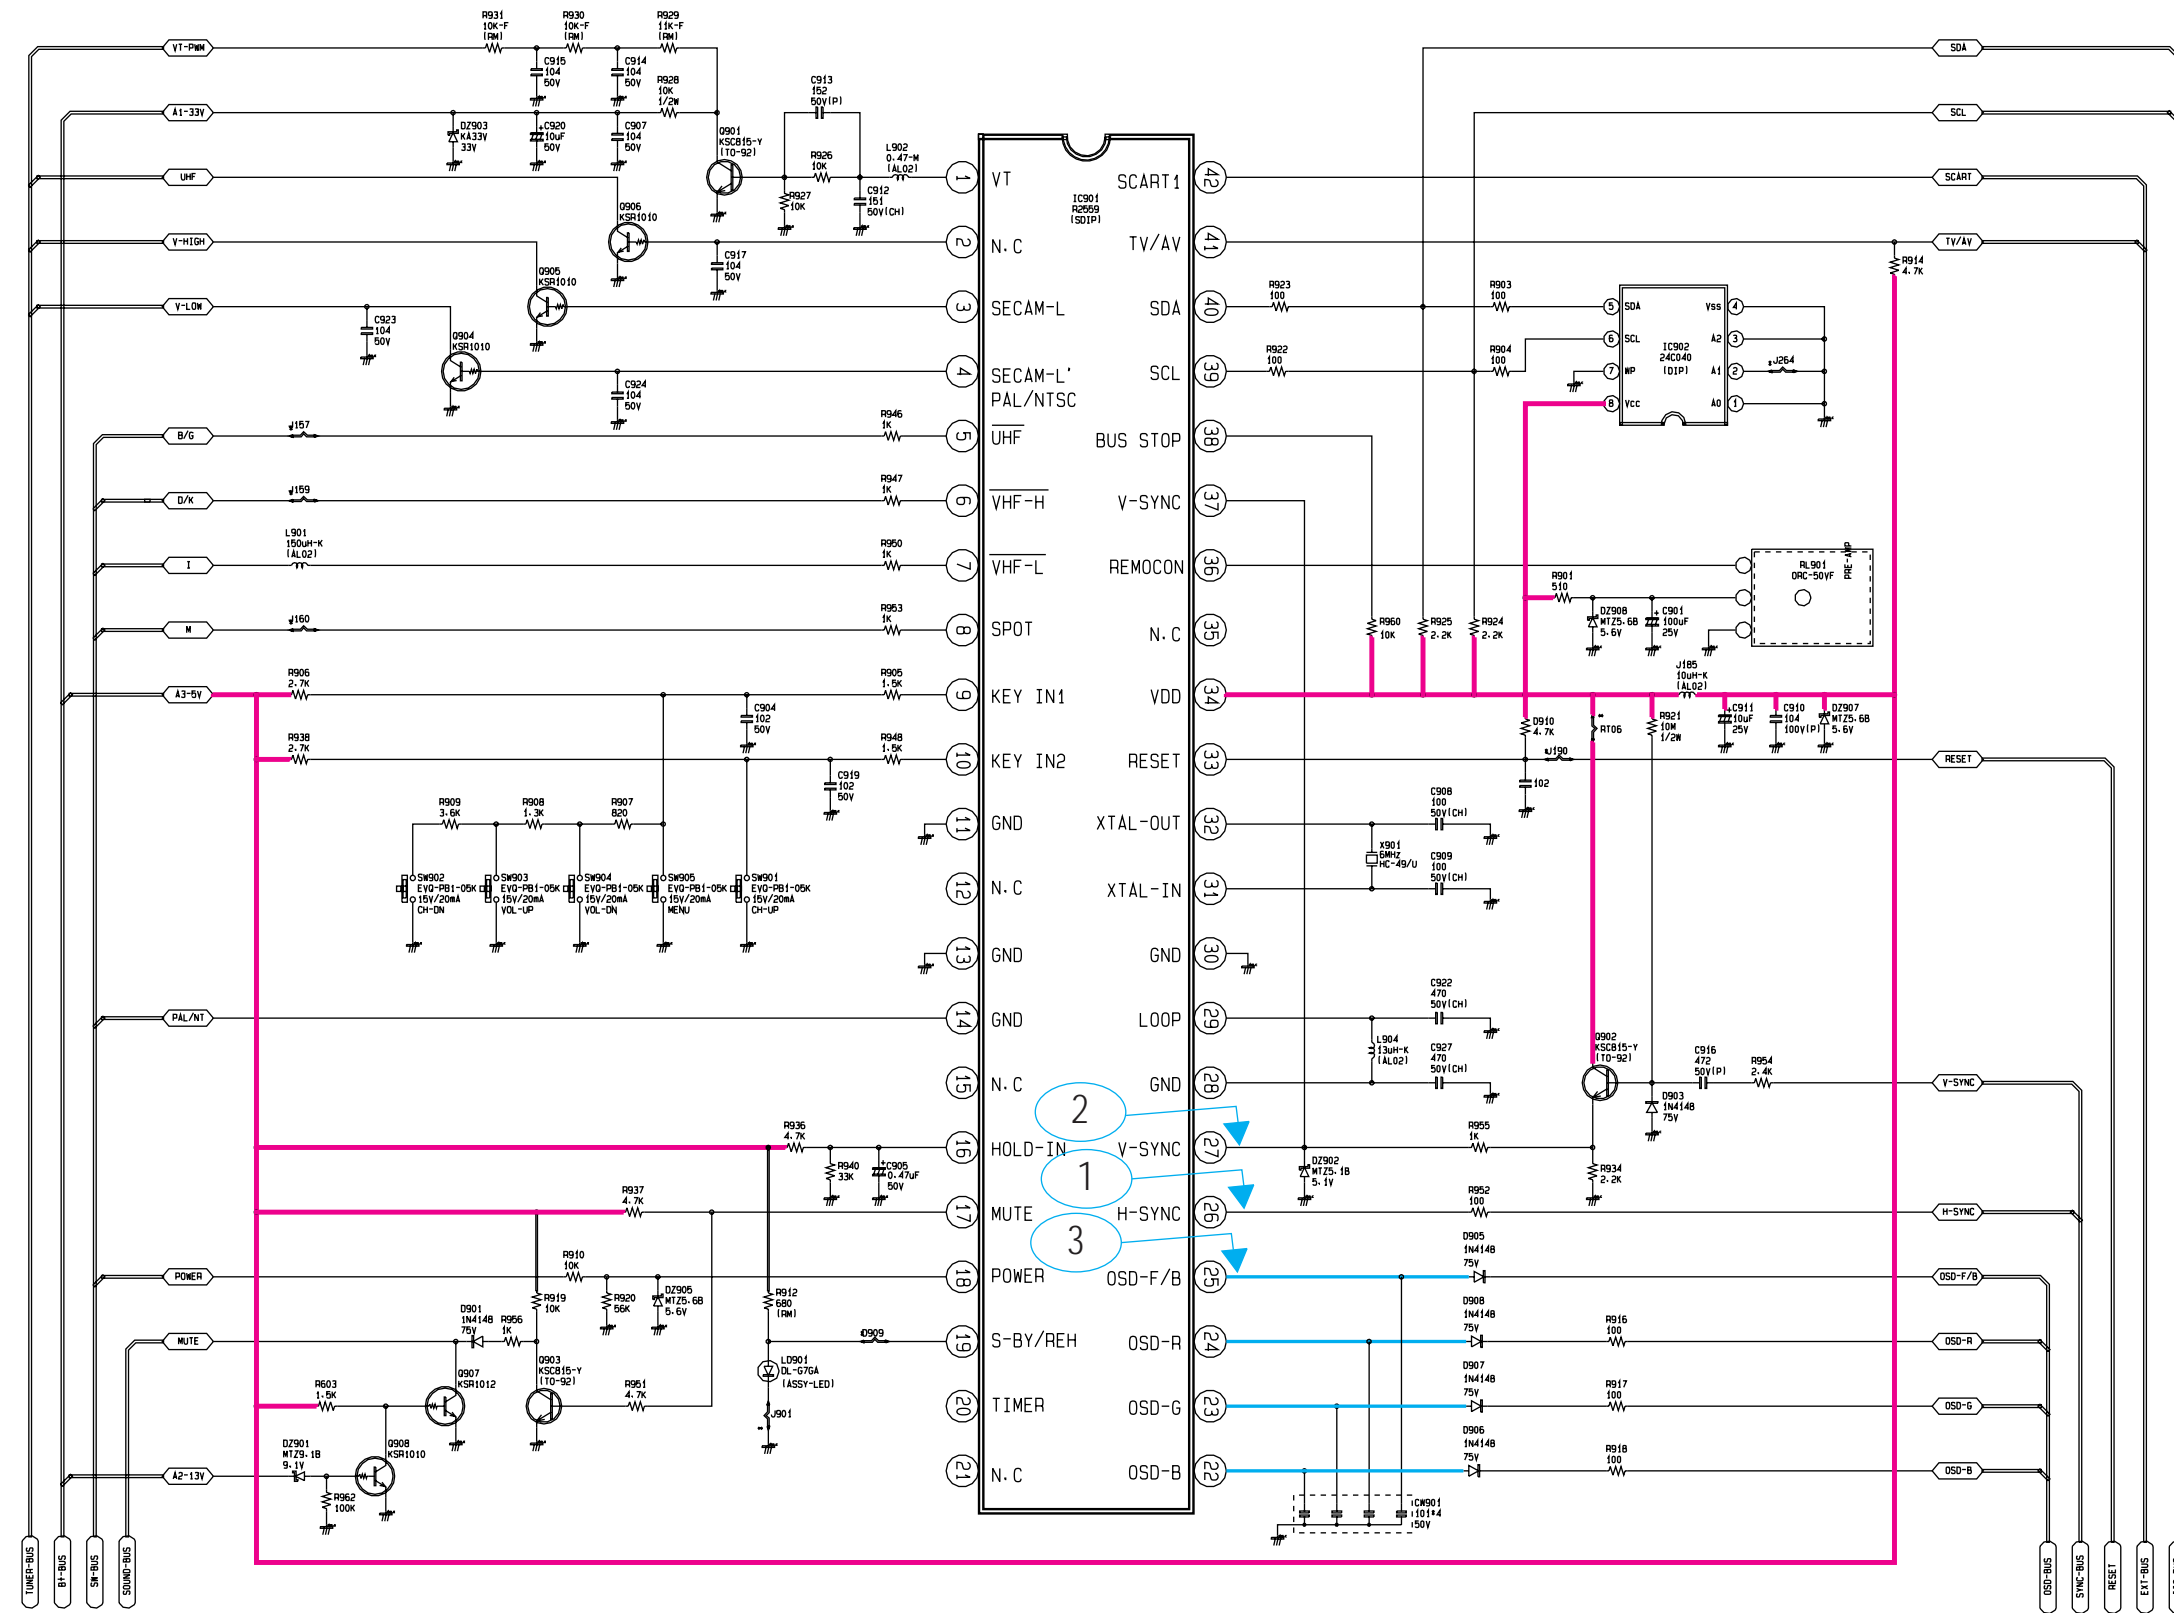

— : Power Line
 — : Signal Line