

SERVICE NOTICE ON REPLACING EEPROM

In case that defective EEPROM of PAL models is replaced, to operate these sets from the initial state MP KEY must be repaired as well before delivering to the customer.

If MP KEY isn't repaired the setting of RF OUT channel or LANGUAGE might be different from that for customer's country.

- **MP KEY** : In case of PAL VCR if holding the REC button on the front panel and the CLEAR button on the remote control handset for 5 ~ 7 seconds with power being switch all and no tapes, OK is displayed at FLD for FLD models and LED becomes on for LED CLOCK models.


This is the state that initializing EEPROM is finished.

(In case of PAL VCP if holding the REC button on the front panel and the MENU button on the remote control handset for 5 ~ 7 seconds with power being off and no tapes, All the LED DOTs become on. This is the state that initializing EEPROM is finished.)


- **MP KEY's function** : MP KEY sets EEPROM's data up to the initial state.



- **FLD MODEL:**
MP KEY "OK"

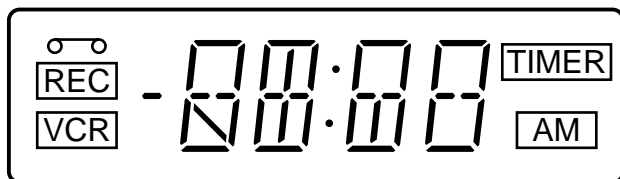

- **LED CLOCK MODEL:**
MP KEY Switch all on a Light

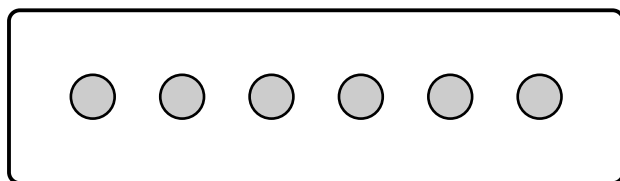

- **LED DOT MODEL:**
MP KEY Switch all on a Light