

PARTS LIST

DX-T99A,DX-T99EE,DX-T99US,DX-T99UW
DX-T99UX,DX-T99UG,DX-T99UN
DX-T77EE,DX-T77US,DX-T77UW,DX-T77UX
DX-T77UY,DX-T77UG,DX-T77UN
DX-T66EE,DX-T66US,DX-T66UW,DX-T66UX
DX-T66UY,DX-T66UG,DX-T66UN

* All printed circuit boards and its assemblies are not available as service parts.

- Contents -


Exploded view of general assembly and parts list (Block No.M1) (DX-T99)	3- 2
Exploded view of general assembly and parts list (Block No.M2) (DX-T77)	3- 6
Exploded view of general assembly and parts list (Block No.M3) (DX-T66)	3-10
DVD mechanism assembly and parts list (Block No.MJ) (Common)	3-14
DVD changer mechanism assembly and parts list (Block No.MK) (FMU-SB4-1M) (DX-T99,DX-T77)	3-16
DVD changer mechanism assembly and parts list (Block No.MS) (FMU-SB4-11M) (DX-T66)	3-18
Cassette mechanism assembly and parts list (Block No.MP) (SLC-S401M) (Cassette A) (Common)	3-20
Cassette mechanism assembly and parts list (Block No.MQ) (SLC-S304M) (Cassette B) (Common)	3-22
Electrical parts list (Block No.01~15)	3-24
Packing materials and accessories parts list (Block No.M4) (DX-T99)	3-52
Packing materials and accessories parts list (Block No.M5) (DX-T77)	3-54
Packing materials and accessories parts list (Block No.M6) (DX-T66)	3-56


Exploded view of general assembly and parts list

(DX-T99)

Block No.

M	1	M	M
---	---	---	---

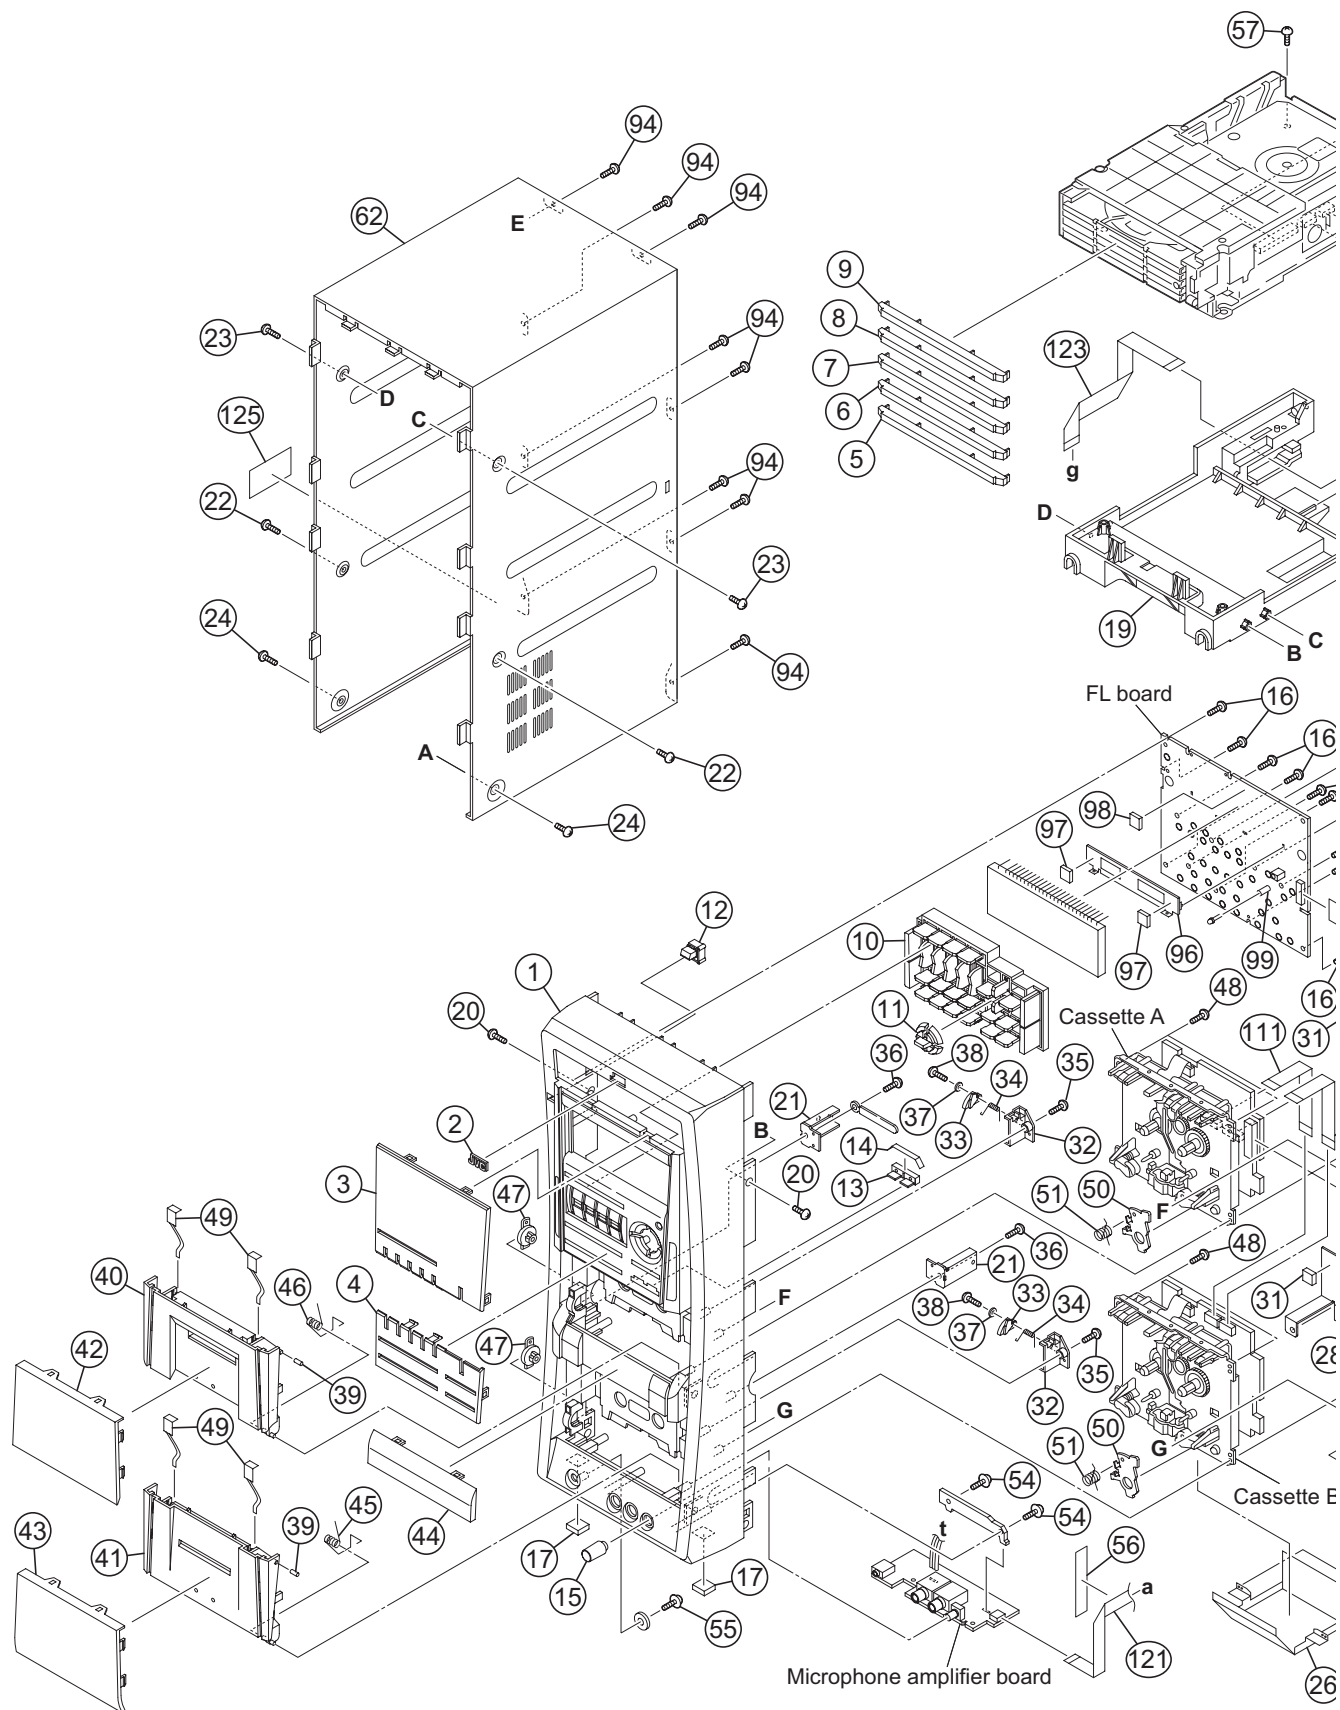

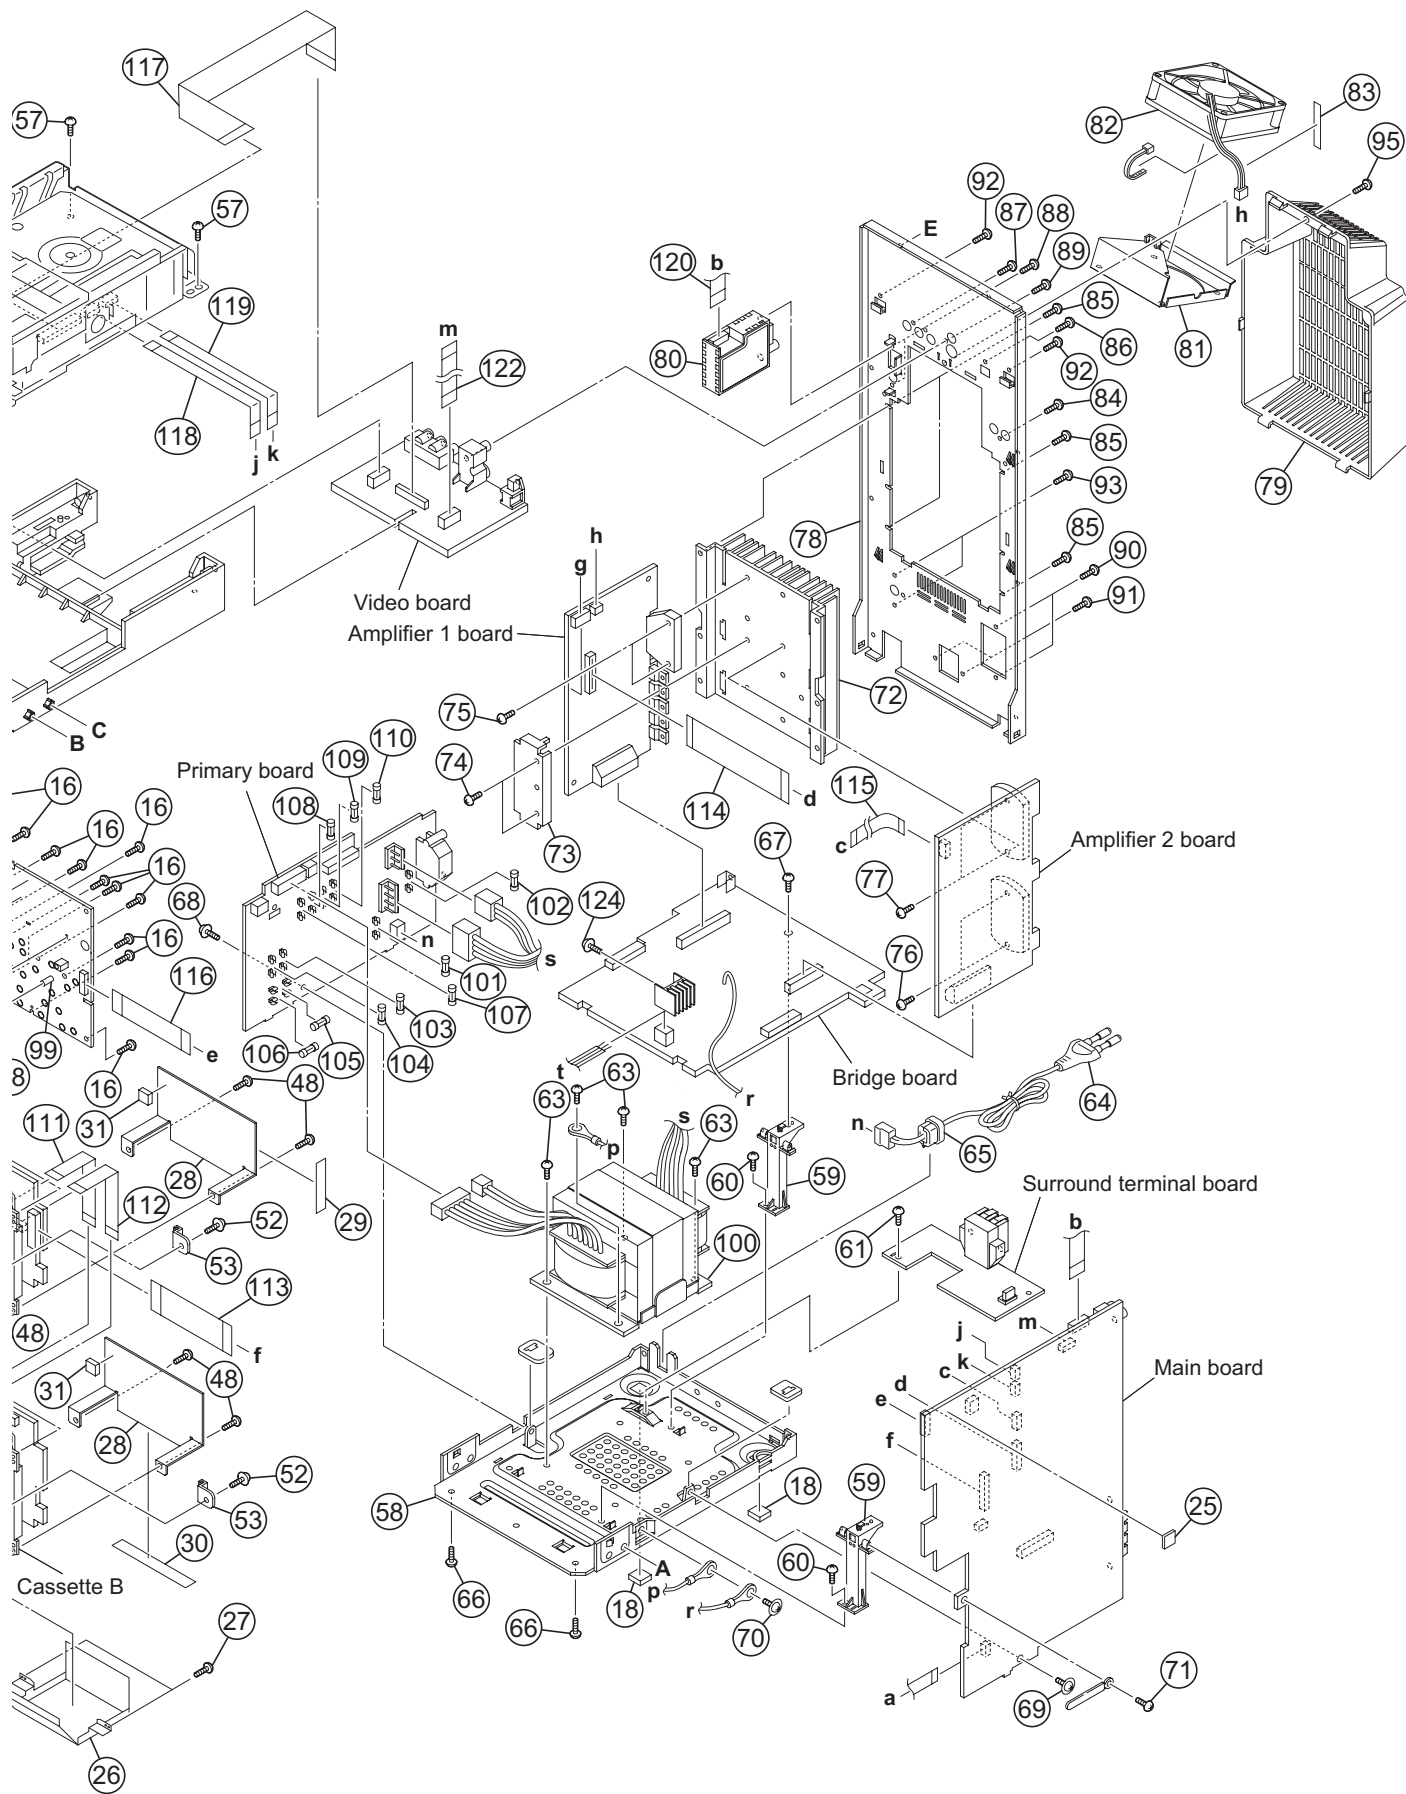

General Assembly (DX-T99)

Block No. [M][1][M][M]

△	Symbol No.	Part No.	Part Name	Description	Local
	1	GV10276-018A	FRONT PANEL ASY		
	2	GV40077-002A	JVC BADGE		
	3	GV30697-016A	FL LENS		
	4	GV30698-004A	BUTTON LENS		
	5	GV30699-006A	TRAY FITTING 1		
	6	GV30700-006A	TRAY FITTING 2		
	7	GV30701-006A	TRAY FITTING 3		
	8	GV30702-006A	TRAY FITTING 4		
	9	GV30703-006A	TRAY FITTING 5		
	10	GV10273-001A	CENTER BUTTON		
	11	GV40586-003A	V.ILLUMINATION		
	12	GV40587-001A	POWER INDICATOR		
	13	GV40588-001A	RHYTHM.INDICATOR		
	14	GV40628-001A	SPACER		
	15	GV40608-002A	MIC.VOL KNOB		
	16	QYSDSF2608ZA	TAP SCREW	M2.6 x 8mm(x11)	
	17	GV40313-001A	FELT SPACER	(x2)	
	18	GV40313-002A	FELT SPACER	(x2)	
	19	GV10355-001A	MECHA CHASSIS		
	20	QYSSSF3010ZA	TAP SCREW	M3 x 10mm(x2)	
	21	GV40584-001A	METAL COVER BKT	(x2)	
	22	QYSDSG3008NA	TAP SCREW	M3 x 8mm(x2)	
	23	QYSDSG3008NA	TAP SCREW	M3 x 8mm(x2)	
	24	QYSDSG3008NA	TAP SCREW	M3 x 8mm(x2)	
	25	GV30349-065A	SPACER		
	26	GV30071-001A	HEAD SHIELD		
	27	QYSDSF2608ZA	TAP SCREW	M2.6 x 8mm(x2)	
	28	GV30124-001A	TRANS SHIELD	(x2)	
	29	GV30349-046A	SPACER		
	30	GV30349-064A	SPACER		
	31	GV30349-049A	SPACER	(x2)	
	32	GV40589-002A	SWING CAM BKT	(x2)	
	33	GV40501-002A	SWING CAM	(x2)	
	34	GV40502-002A	SPRING	(x2)	
	35	QYSBSF3008ZA	TAP SCREW	M3 x 8mm(x2)	
	36	QYSBSF3010ZA	TAP SCREW	M3 x 10mm(x2)	
	37	GV40503-001A	WASHER	(x2)	
	38	GV40504-002A	SCREW	(x2)	
	39	GV40515-001A	METAL PIN	(x2)	
	40	GV10262-002A	CASS.HOLDER(A)		
	41	GV10261-003A	CASS.HOLDER(B)		
	42	GV20344-001A	CASS.LENS (A)		
	43	GV20343-001A	CASS.LENS (B)		
	44	GV30705-001A	LENS ORNAMENT		
	45	GV40596-001A	DOOR SPRING(B)		
	46	GV40619-001A	DOOR SPRING(A)		
	47	GV40034-001A	DAMPER ASSY.	(x2)	
	48	QYSBSF3010ZA	TAP SCREW	M3 x 10mm(x8)	
	49	VKY4180-401	CASSETTE SPRING	(x4)	
	50	VKL7850-002	EJECT SAFTY(R)	(x2)	
	51	VKW5258-003	TORSION SPRING	(x2)	
	52	QYSBSF3008ZA	TAP SCREW	M3 x 8mm(x2)	
	53	GV40618-001A	SLC BRACKET	(x2)	
	54	QYSBSF3008ZA	TAP SCREW	M3 x 8mm(x2)	
	55	QYSDSF2608ZA	TAP SCREW	M2.6 x 8mm	
	56	GV30349-050A	SPACER		
	57	QYSBSF3008ZA	TAP SCREW	M3 x 8mm(x2)	
	58	GV10253-004A	BOTTOM CHASSIS		
	59	GV30706-001A	SUPPORT BKT.	(x2)	
	60	QYSBSG3006ZA	TAP SCREW	M3 x 6mm(x2)	
	61	QYSBSG3006ZA	TAP SCREW	M3 x 6mm	
	62	GV10254-005A/S/	METAL COVER		
	63	QYSDSTL4008EA	TAP SCREW	M4 x 8mm(x4)	
△	64	QMPG150-244-JC	POWER CORD(AST)	2.44m BLACK	T99A
△	64	QMPK200-200-JD	POWER CORD(EU)	2m BLACK	T99EE,T99US,T99UW,T99UG,T99UN
△	64	QMPN240-200-JD	POWER CORD(EU)	2m BLACK	T99UX
△	65	QZW0033-001	STRAIN RELIEF		
	66	QYSST3008ZA	TAP SCREW	M3 x 8mm(x2)	
	67	QYSBSF3008ZA	TAP SCREW	M3 x 8mm	
	68	QYSBSG3008ZA	TAP SCREW	M3 x 8mm	
	69	QYSBSG3008ZA	TAP SCREW	M3 x 8mm	
	70	QYSBSGG3008EA	TAP SCREW	M3 x 8mm	
	71	QYSBSF3008ZA	TAP SCREW	M3 x 8mm	
	72	GV30694-004A	HEAT SINK		


△	Symbol No.	Part No.	Part Name	Description	Local
	73	GV40488-001A	LEAF SPRING		
	74	QYSBSG3016EA	TAP SCREW	M3 x 16mm(x2)	
	75	QYSBSG3016EA	TAP SCREW	M3 x 16mm(x2)	
	76	QYSBSG3016EA	TAP SCREW	M3 x 16mm(x2)	
	77	QYSBSG3016EA	TAP SCREW	M3 x 16mm(x2)	
	78	GV10255-057A	REAR PANEL		T99A
	78	GV10255-054A	REAR PANEL		T99EE
	78	GV10255-055A	REAR PANEL		T99US,T99UN
	78	GV10255-053A	REAR PANEL		T99UW
	78	GV10255-056A	REAR PANEL		T99UX,T99UG
	79	GV10263-002A	REAR COVER		
	80	QAU0412-001	TUNER		
	81	GV30686-002A	FAN BKT.		
	82	QAR0405-001	FAN		
	83	GV30349-026A	SPACER		
	84	QYSBSGY3008EA	TAP SCREW	M3 x 8mm	
	85	QYSBSGY3008EA	TAP SCREW	M3 x 8mm(x4)	
	86	QYSBSGY3008EA	TAP SCREW	M3 x 8mm	
	87	QYSBSGY3008EA	TAP SCREW	M3 x 8mm	
	88	QYSBSGY3008EA	TAP SCREW	M3 x 8mm(x2)	
	89	QYSBSGY3008EA	TAP SCREW	M3 x 8mm	
	90	QYSBSGY3008EA	TAP SCREW	M3 x 8mm(x2)	
	91	QYSBSGY3008EA	TAP SCREW	M3 x 8mm(x2)	
	92	QYSBSGY3008EA	TAP SCREW	M3 x 8mm(x2)	
	93	QYSBSF3012EA	TAP SCREW	M3 x 12mm(x2)	
	94	QYSBSGY3008EA	TAP SCREW	M3 x 8mm(x8)	
	95	QYSBSGY3008EA	TAP SCREW	M3 x 8mm	
	96	GV30687-002A	FL HOLDER		
	97	GV30349-021A	SPACER	(x2)	
	98	GV30349-049A	SPACER		
	99	GV40531-002A	LED HOLDER		
△	100	QQT0477-003	POWER TRANSF	T1001	
△	101	QMFZ051-8R0-J8	FUSE	F1001 8A	
△	102	QMF51W2-6R3-J8	FUSE	F1002 6.3A AC250V	
△	103	QMF51W2-6R3-J8	FUSE	F1003 6.3A AC250V	
△	104	QMF51W2-6R3-J8	FUSE	F1004 6.3A AC250V	
△	105	QMF51W2-1R25-J8	FUSE	F1005 1.25A AC250V	
△	106	QMF51W2-3R15-J8	FUSE	F1006 3.15A AC250V	
△	107	QMF51W2-5R0-J8	FUSE	F1007 5A AC250V	
△	108	QMF51W2-5R0-J8	FUSE	F1008 5A AC250V	
△	109	QMF51W2-5R0-J8	FUSE	F1009 5A AC250V	
△	110	QMF51W2-5R0-J8	FUSE	F1010 5A AC250V	
	111	QUQU12-0910BJ-E	FFC WIRE	9pin 10cm	
	112	QUQU12-1010BJ-E	FFC WIRE	10pin 10cm	
	113	QUQU12-2512AJ-E	FFC WIRE	25pin 12cm	
	114	QUQU12-1916AJ-E	FFC WIRE	19pin 16cm	
	115	QUQU12-0808AJ-E	FFC WIRE	8pin 8cm	
	116	QUR110-1910AJ-E	FFC WIRE	19pin 10cm	
	117	QUR110-2823AJ-E	FFC WIRE	28pin 23cm	
	118	QUR110-1016AJ-E	FFC WIRE	10pin 16cm	
	119	QUR110-0814AJ-E	FFC WIRE	8pin 14cm	
	120	QUQU12-1118AJ-E	FFC WIRE	11pin 18cm	
	121	QUQU12-0516BJ-E	FFC WIRE	5pin 16cm	
	122	QUQU12-0813AJ-E	FFC WIRE	8pin 13cm	
	123	QUQU12-1118AJ-E	FFC WIRE	11pin 18cm	
	124	QYSBSG3010ZA	TAP SCREW	M3 x 10mm	
	125	GV40642-001A	CAUTION LABEL		T99UW


Exploded view of general assembly and parts list

(DX-T77)

Block No.

M	2	M	M
---	---	---	---

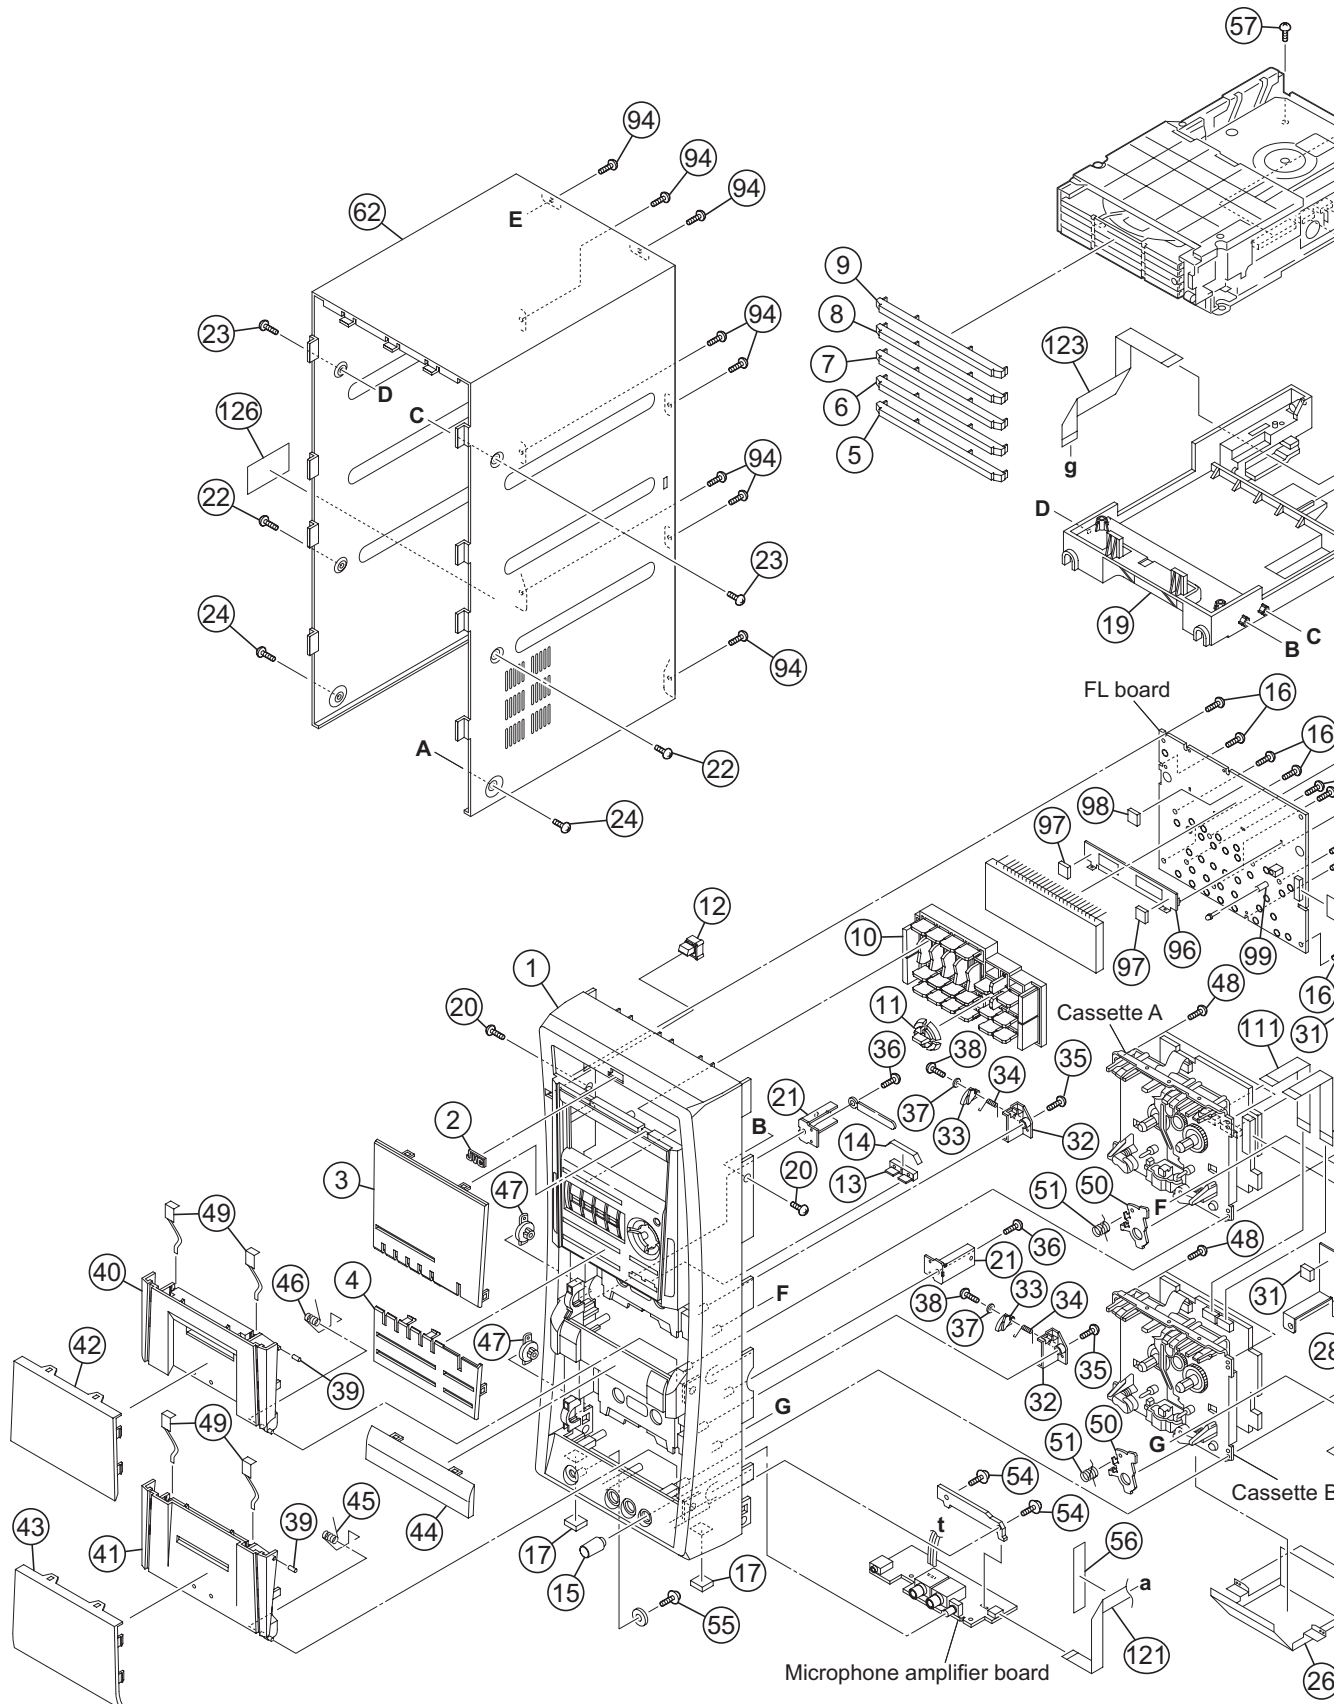

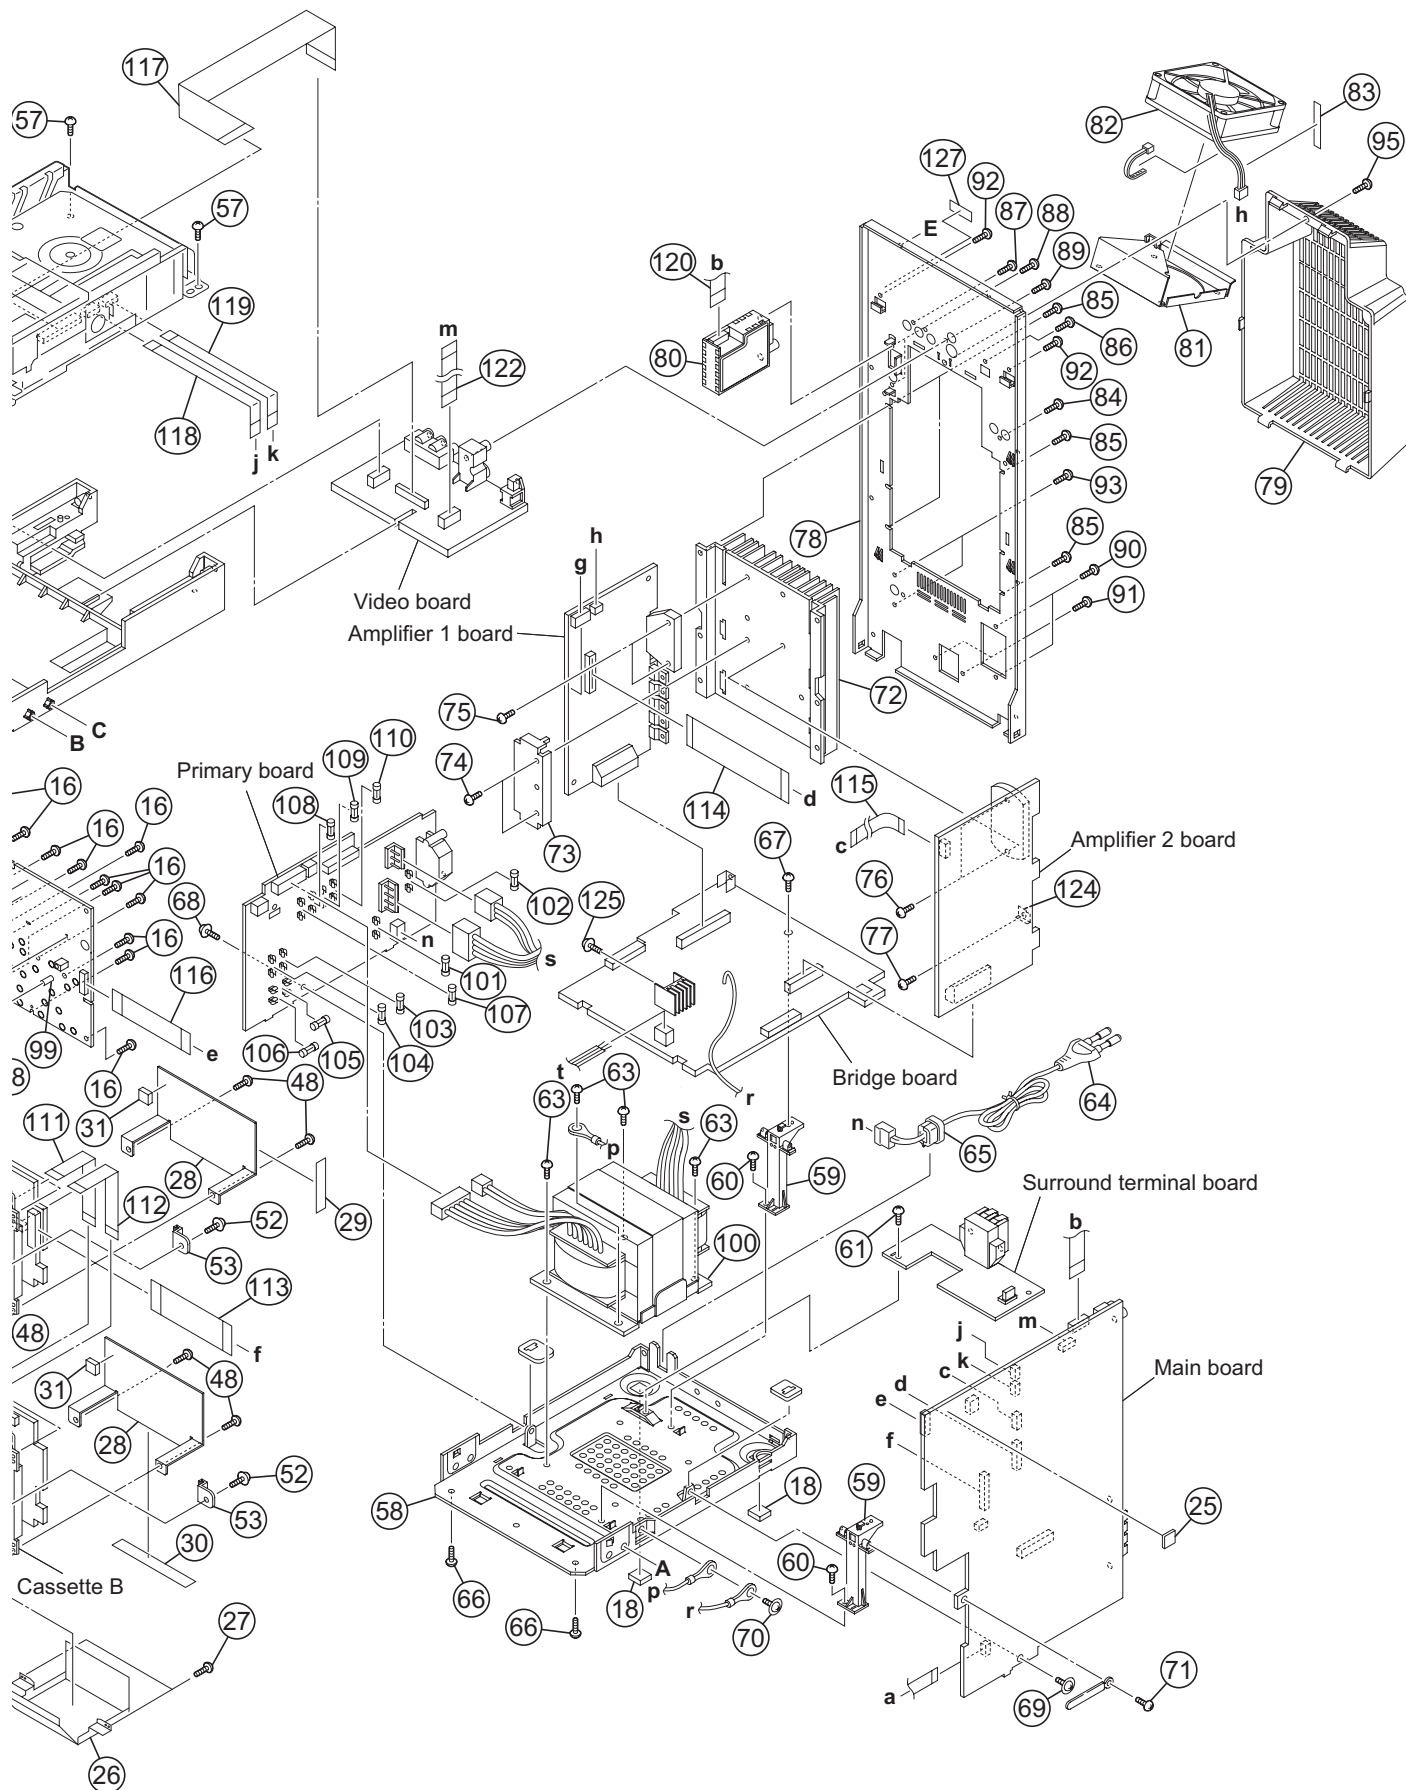

General Assembly (DX-T77)

Block No. [M][2][M][M]


△	Symbol No.	Part No.	Part Name	Description	Local
	1	GV10276-018A	FRONT PANEL ASY		
	2	GV40077-002A	JVC BADGE		
	3	GV30697-015A	FL LENS		
	4	GV30698-004A	BUTTON LENS		
	5	GV30699-005A	TRAY FITTING 1		
	6	GV30700-005A	TRAY FITTING 2		
	7	GV30701-005A	TRAY FITTING 3		
	8	GV30702-005A	TRAY FITTING 4		
	9	GV30703-005A	TRAY FITTING 5		
	10	GV10273-001A	CENTER BUTTON		
	11	GV40586-003A	V.ILLUMINATION		
	12	GV40587-001A	POWER INDICATOR		
	13	GV40588-001A	RHYTHM.INDICATOR		
	14	GV40628-001A	SPACER		
	15	GV40608-002A	MIC.VOL KNOB		
	16	QYSDSF2608ZA	TAP SCREW	M2.6 x 8mm(x11)	
	17	GV40313-001A	FELT SPACER	(x2)	
	18	GV40313-002A	FELT SPACER	(x2)	
	19	GV10355-001A	MECHA CHASSIS		
	20	QYSSSF3010ZA	TAP SCREW	M3 x 10mm(x2)	
	21	GV40584-001A	METAL COVER BKT	(x2)	
	22	QYSDSG3008NA	TAP SCREW	M3 x 8mm(x2)	
	23	QYSDSG3008NA	TAP SCREW	M3 x 8mm(x2)	
	24	QYSDSG3008NA	TAP SCREW	M3 x 8mm(x2)	
	25	GV30349-065A	SPACER		
	26	GV30071-001A	HEAD SHIELD		
	27	QYSDSF2608ZA	TAP SCREW	M2.6 x 8mm(x2)	
	28	GV30124-001A	TRANS SHIELD	(x2)	
	29	GV30349-046A	SPACER		
	30	GV30349-064A	SPACER		
	31	GV30349-049A	SPACER	(x2)	
	32	GV40589-002A	SWING CAM BKT	(x2)	
	33	GV40501-002A	SWING CAM	(x2)	
	34	GV40502-002A	SPRING	(x2)	
	35	QYSBSF3008ZA	TAP SCREW	M3 x 8mm(x2)	
	36	QYSBSF3010ZA	TAP SCREW	M3 x 10mm(x2)	
	37	GV40503-001A	WASHER	(x2)	
	38	GV40504-002A	SCREW	(x2)	
	39	GV40515-001A	METAL PIN	(x2)	
	40	GV10262-002A	CASS.HOLDER(A)		
	41	GV10261-003A	CASS.HOLDER(B)		
	42	GV20344-001A	CASS.LENS (A)		
	43	GV20343-001A	CASS.LENS (B)		
	44	GV30705-001A	LENS ORNAMENT		
	45	GV40596-001A	DOOR SPRING(B)		
	46	GV40619-001A	DOOR SPRING(A)		
	47	GV40034-001A	DAMPER ASSY.	(x2)	
	48	QYSBSF3010ZA	TAP SCREW	M3 x 10mm(x8)	
	49	VKY4180-401	CASSETTE SPRING	(x4)	
	50	VKL7850-002	EJECT SAFETY(R)	(x2)	
	51	VKW5258-003	TORSION SPRING	(x2)	
	52	QYSBSF3008ZA	TAP SCREW	M3 x 8mm(x2)	
	53	GV40618-001A	SLC BRACKET	(x2)	
	54	QYSBSF3008ZA	TAP SCREW	M3 x 8mm(x2)	
	55	QYSDSF2608ZA	TAP SCREW	M2.6 x 8mm	
	56	GV30349-050A	SPACER		
	57	QYSBSF3008ZA	TAP SCREW	M3 x 8mm(x2)	
	58	GV10253-004A	BOTTOM CHASSIS		
	59	GV30706-001A	SUPPORT BKT.	(x2)	
	60	QYSBSG3006ZA	TAP SCREW	M3 x 6mm(x2)	
	61	QYSBSG3006ZA	TAP SCREW	M3 x 6mm	
	62	GV10254-005A/S/	METAL COVER		
	63	QYSDSTL4008EA	TAP SCREW	M4 x 8mm(x4)	
△	64	QMPK200-200-JD	POWER CORD(EU)	2m BLACK	T77EE,T77US,T77UW,T77UX,T77UG,T77UN
△	64	QMPR300-200-JC	POWER CORD(EU)	2m BLACK	T77UY
△	65	QZW0033-001	STRAIN RELIEF		
	66	QYSSST3008ZA	TAP SCREW	M3 x 8mm(x2)	
	67	QYSBSF3008ZA	TAP SCREW	M3 x 8mm	
	68	QYSBSG3008ZA	TAP SCREW	M3 x 8mm	
	69	QYSBSG3008ZA	TAP SCREW	M3 x 8mm	
	70	QYSBSGG3008EA	TAP SCREW	M3 x 8mm	
	71	QYSBSF3008ZA	TAP SCREW	M3 x 8mm	
	72	GV30694-002A	HEAT SINK		
	73	GV40488-001A	LEAF SPRING		


△	Symbol No.	Part No.	Part Name	Description	Local
	74	QYSBSG3016EA	TAP SCREW	M3 x 16mm(x2)	
	75	QYSBSG3016EA	TAP SCREW	M3 x 16mm(x2)	
	76	QYSBSG3016EA	TAP SCREW	M3 x 16mm(x2)	
	77	QYSBSG3016EA	TAP SCREW	M3 x 16mm	
	78	GV10255-050A	REAR PANEL		T77EE
	78	GV10255-051A	REAR PANEL		T77US,T77UN
	78	GV10255-048A	REAR PANEL		T77UW
	78	GV10255-052A	REAR PANEL		T77UX,T77UG
	78	GV10255-049A	REAR PANEL		T77UY
	79	GV10263-002A	REAR COVER		
	80	QAU0412-001	TUNER		
	81	GV30686-002A	FAN BKT.		
	82	QAR0405-001	FAN		
	83	GV30349-026A	SPACER		
	84	QYSBSGY3008EA	TAP SCREW	M3 x 8mm	
	85	QYSBSGY3008EA	TAP SCREW	M3 x 8mm(x4)	
	86	QYSBSGY3008EA	TAP SCREW	M3 x 8mm	
	87	QYSBSGY3008EA	TAP SCREW	M3 x 8mm	
	88	QYSBSGY3008EA	TAP SCREW	M3 x 8mm(x2)	
	89	QYSBSGY3008EA	TAP SCREW	M3 x 8mm	
	90	QYSBSGY3008EA	TAP SCREW	M3 x 8mm(x2)	
	91	QYSBSGY3008EA	TAP SCREW	M3 x 8mm(x2)	
	92	QYSBSGY3008EA	TAP SCREW	M3 x 8mm(x2)	
	93	QYSBSF3012EA	TAP SCREW	M3 x 12mm(x2)	
	94	QYSBSGY3008EA	TAP SCREW	M3 x 8mm(x8)	
	95	QYSBSGY3008EA	TAP SCREW	M3 x 8mm	
	96	GV30687-002A	FL HOLDER		
	97	GV30349-021A	SPACER	(x2)	
	98	GV30349-049A	SPACER		
	99	GV40531-002A	LED HOLDER		
△	100	QQT0476-001	POWER TRANSF	T1001	
△	101	QMF51W2-6R3-J8	FUSE	F1001 6.3A AC250V	
△	102	QMF51W2-5R0-J8	FUSE	F1002 5A AC250V	
△	103	QMF51W2-6R3-J8	FUSE	F1003 6.3A AC250V	
△	104	QMF51W2-6R3-J8	FUSE	F1004 6.3A AC250V	
△	105	QMF51W2-1R25-J8	FUSE	F1005 1.25A AC250V	
△	106	QMF51W2-3R15-J8	FUSE	F1006 3.15A AC250V	
△	107	QMF51W2-4R0-J8	FUSE	F1007 4A AC250V	
△	108	QMF51W2-4R0-J8	FUSE	F1008 4A AC250V	
△	109	QMF51W2-4R0-J8	FUSE	F1009 4A AC250V	
△	110	QMF51W2-4R0-J8	FUSE	F1010 4A AC250V	
	111	QUQU12-0910BJ-E	FFC WIRE	9pin 10cm	
	112	QUQU12-1010BJ-E	FFC WIRE	10pin 10cm	
	113	QUQU12-2512AJ-E	FFC WIRE	25pin 12cm	
	114	QUQU12-1916AJ-E	FFC WIRE	19pin 16cm	
	115	QUQU12-0808AJ-E	FFC WIRE	8pin 8cm	
	116	QUR110-1910AJ-E	FFC WIRE	19pin 10cm	
	117	QUR110-2823AJ-E	FFC WIRE	28pin 23cm	
	118	QUR110-1016AJ-E	FFC WIRE	10pin 16cm	
	119	QUR110-0814AJ-E	FFC WIRE	8pin 14cm	
	120	QUQU12-1118AJ-E	FFC WIRE	11pin 18cm	
	121	QUQU12-0516BJ-E	FFC WIRE	5pin 16cm	
	122	QUQU12-0813AJ-E	FFC WIRE	8pin 13cm	
	123	QUQU12-1118AJ-E	FFC WIRE	11pin 18cm	
	124	GV40327-002A	IC BRD.HOLDER	EP651	
	125	QYSBSG3010ZA	TAP SCREW	M3 x 10mm	
	126	GV40642-001A	CAUTION LABEL		T77UW
	127	LV42938-001A	LABEL		T77UY

Exploded view of general assembly and parts list

(DX-T66)

Block No. M 3 M M

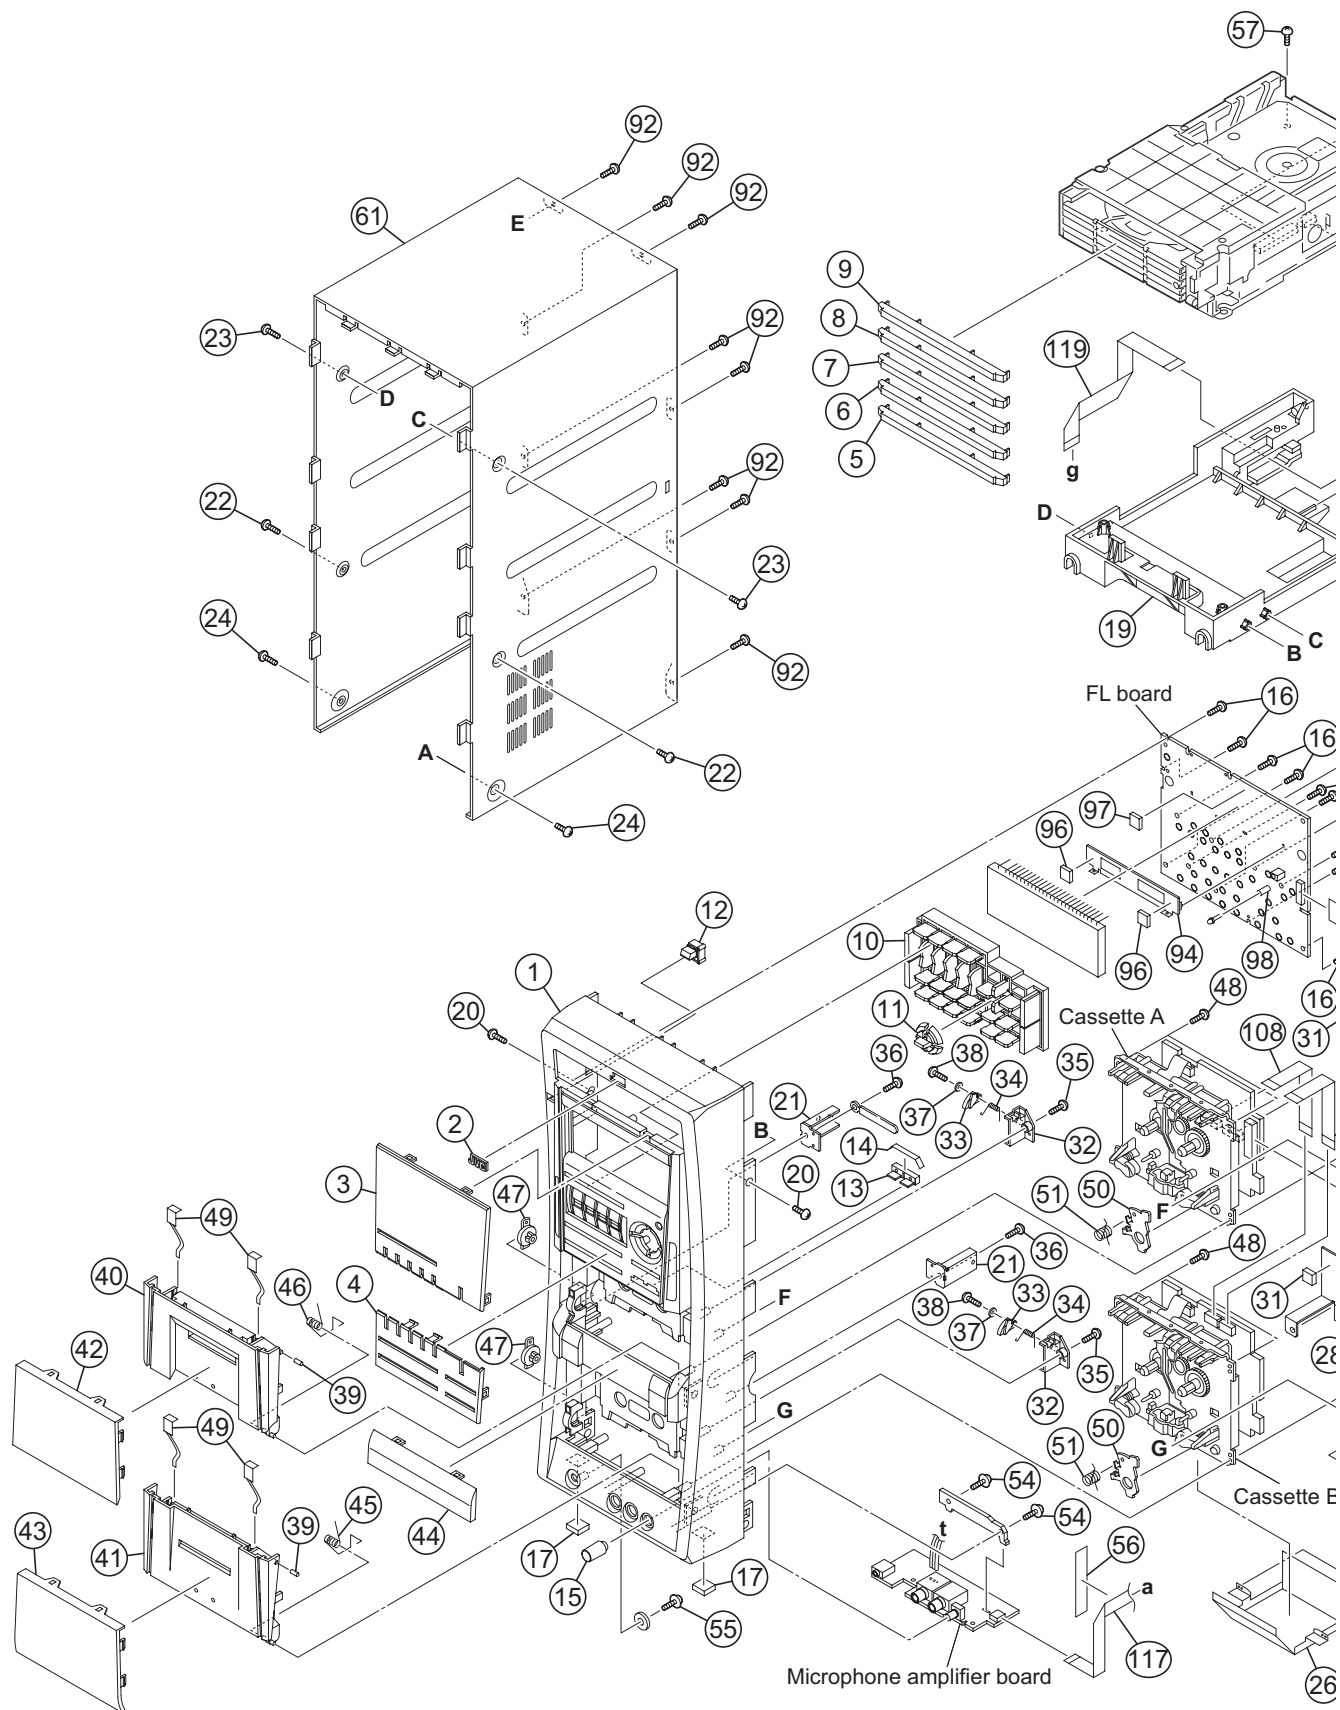

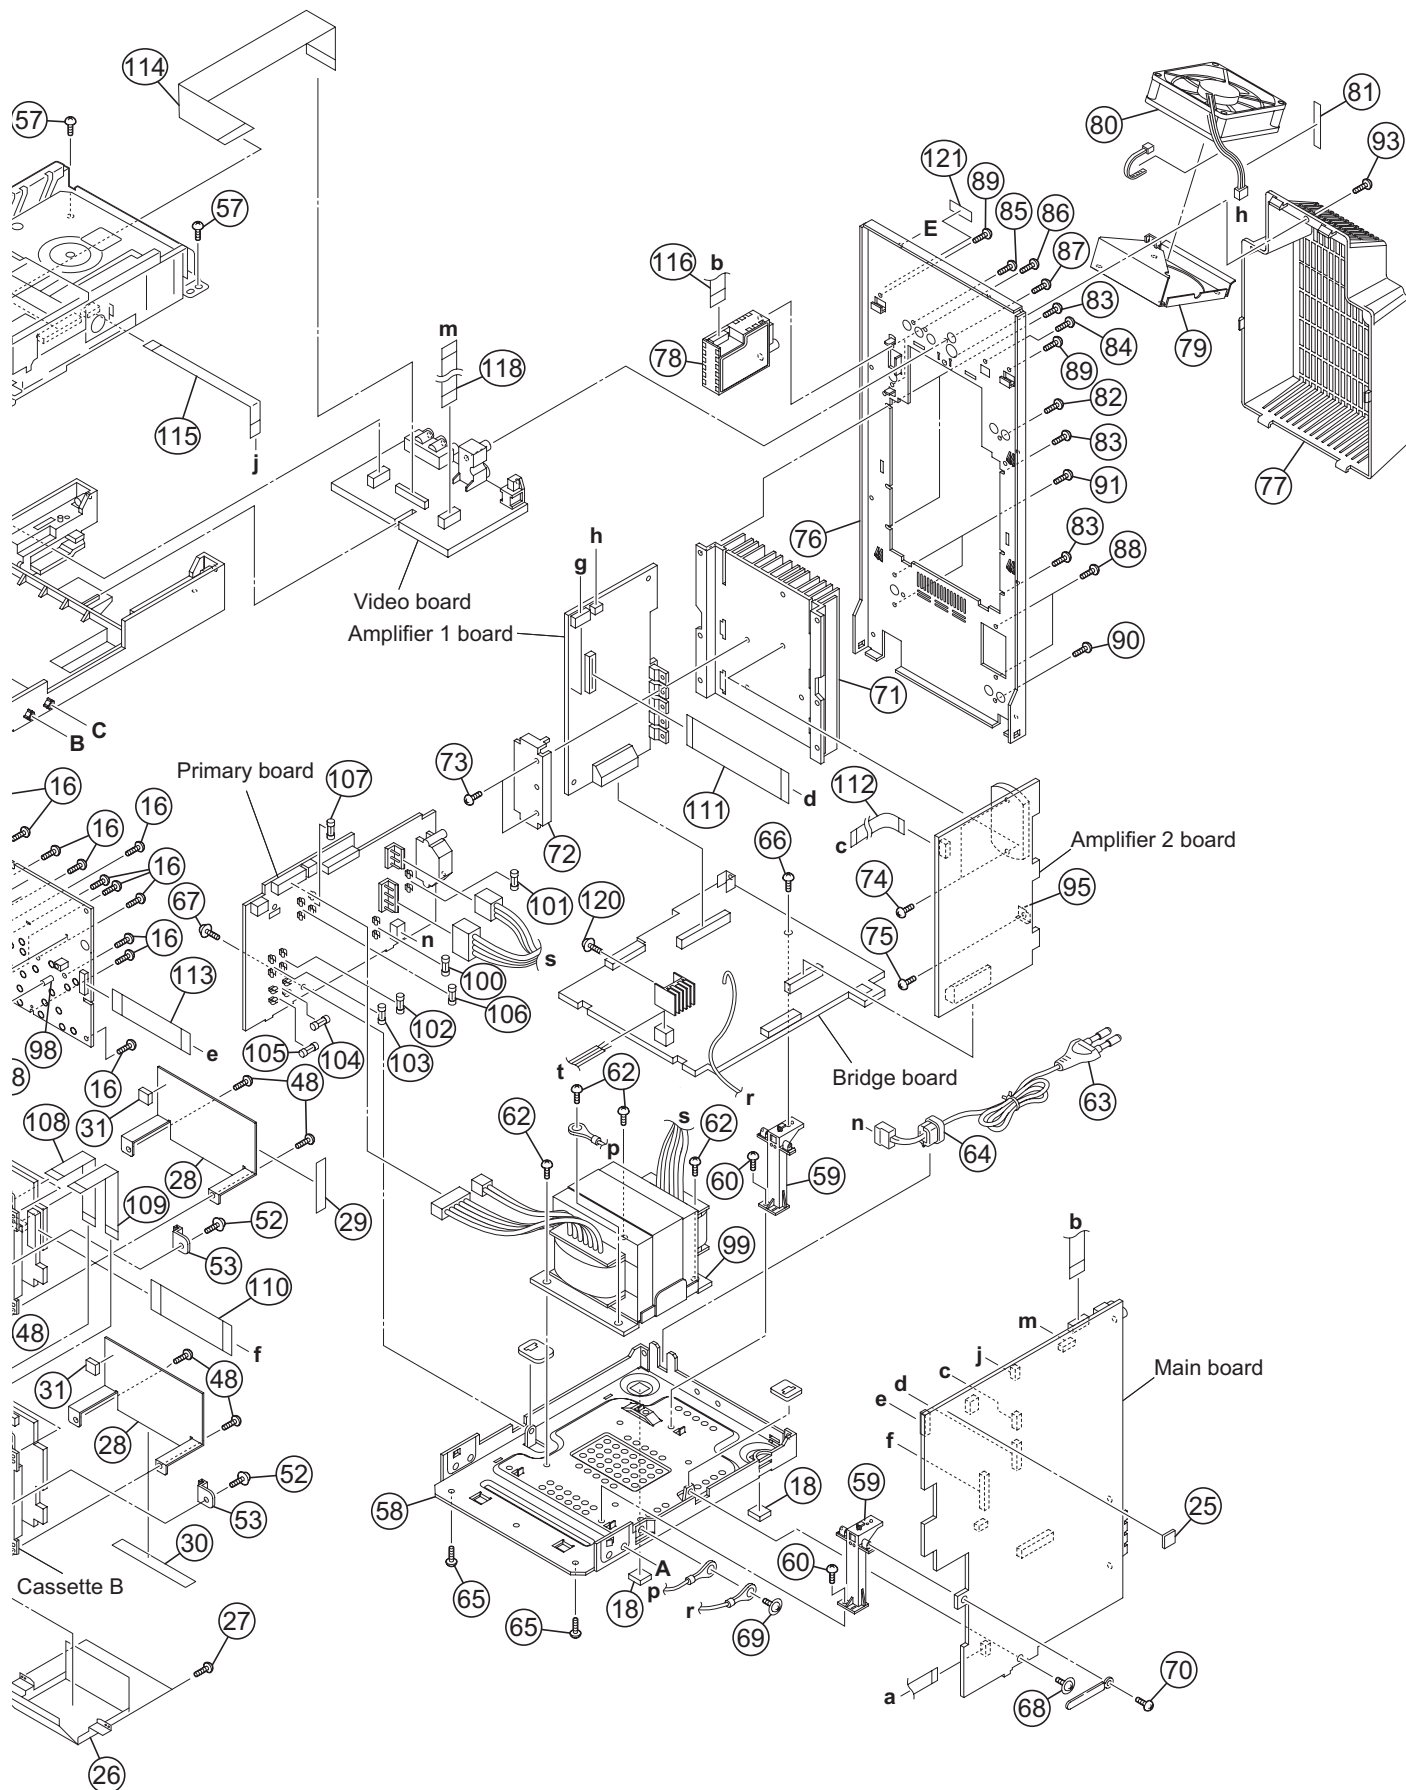

General Assembly (DX-T66)


Block No. [M][3][M][M]

Symbol No.	Part No.	Part Name	Description	Local
1	GV10276-018A	FRONT PANEL ASY		
2	GV40077-002A	JVC BADGE		
3	GV30697-014A	FL LENS		
4	GV30698-003A	BUTTON LENS		
5	GV30699-005A	TRAY FITTING 1		
6	GV30700-005A	TRAY FITTING 2		
7	GV30701-005A	TRAY FITTING 3		
8	GV30702-005A	TRAY FITTING 4		
9	GV30703-005A	TRAY FITTING 5		
10	GV10273-002A	CENTER BUTTON		
11	GV40586-004A	V.ILLUMINATION		
12	GV40587-001A	POWER INDICATOR		
13	GV40588-001A	RHYTHM.INDICATOR		
14	GV40628-001A	SPACER		
15	GV40608-002A	MIC.VOL KNOB		
16	QYSDSF2608ZA	TAP SCREW	M2.6 x 8mm(x11)	
17	GV40313-001A	FELT SPACER	(x2)	
18	GV40313-002A	FELT SPACER	(x2)	
19	GV10355-001A	MECHA CHASSIS		
20	QYSSSF3010ZA	TAP SCREW	M3 x 10mm(x2)	
21	GV40584-001A	METAL COVER BKT	(x2)	
22	QYSDSG3008NA	TAP SCREW	M3 x 8mm(x2)	
23	QYSDSG3008NA	TAP SCREW	M3 x 8mm(x2)	
24	QYSDSG3008NA	TAP SCREW	M3 x 8mm(x2)	
25	GV30349-065A	SPACER		
26	GV30071-001A	HEAD SHIELD		
27	QYSDSF2608ZA	TAP SCREW	M2.6 x 8mm(x2)	
28	GV30124-001A	TRANS SHIELD	(x2)	
29	GV30349-046A	SPACER		
30	GV30349-064A	SPACER		
31	GV30349-049A	SPACER	(x2)	
32	GV40589-002A	SWING CAM BKT	(x2)	
33	GV40501-002A	SWING CAM	(x2)	
34	GV40502-002A	SPRING	(x2)	
35	QYSBSF3008ZA	TAP SCREW	M3 x 8mm(x2)	
36	QYSBSF3010ZA	TAP SCREW	M3 x 10mm(x2)	
37	GV40503-001A	WASHER	(x2)	
38	GV40504-002A	SCREW	(x2)	
39	GV40515-001A	METAL PIN	(x2)	
40	GV10262-002A	CASS.HOLDER(A)		
41	GV10261-003A	CASS.HOLDER(B)		
42	GV20344-001A	CASS.LENS (A)		
43	GV20343-001A	CASS.LENS (B)		
44	GV30705-003A	LENS ORNAMENT		
45	GV40596-001A	DOOR SPRING(B)		
46	GV40619-001A	DOOR SPRING(A)		
47	GV40034-001A	DAMPER ASSY.	(x2)	
48	QYSBSF3010ZA	TAP SCREW	M3 x 10mm(x8)	
49	VKY4180-401	CASSETTE SPRING	(x4)	
50	VKL7850-002	EJECT SAFTY(R)	(x2)	
51	VKW5258-003	TORSION SPRING	(x2)	
52	QYSBSF3008ZA	TAP SCREW	M3 x 8mm(x2)	
53	GV40618-001A	SLC BRACKET	(x2)	
54	QYSBSF3008ZA	TAP SCREW	M3 x 8mm(x2)	
55	QYSDSF2608ZA	TAP SCREW	M2.6 x 8mm	
56	GV30349-050A	SPACER		
57	QYSBSF3008ZA	TAP SCREW	M3 x 8mm(x2)	
58	GV10253-004A	BOTTOM CHASSIS		
59	GV30706-001A	SUPPORT BKT.	(x2)	
60	QYSBSG3006ZA	TAP SCREW	M3 x 6mm(x2)	
61	GV10254-005A/S/	METAL COVER		
62	QYSDSTL4008EA	TAP SCREW	M4 x 8mm(x4)	
63	QMPK200-200-JD	POWER CORD(EU)	2m BLACK	T66EE,T66US,T66UW,T66UX,T66UG,T66UN
63	QMPR300-200-JC	POWER CORD(EU)	2m BLACK	T66UY
64	QZW0033-001	STRAIN RELIEF		
65	QYSSST3008ZA	TAP SCREW	M3 x 8mm(x2)	
66	QYSBSF3008ZA	TAP SCREW	M3 x 8mm	
67	QYSBSG3008ZA	TAP SCREW	M3 x 8mm	
68	QYSBSG3008ZA	TAP SCREW	M3 x 8mm	
69	QYSBSGG3008EA	TAP SCREW	M3 x 8mm	
70	QYSBSF3008ZA	TAP SCREW	M3 x 8mm	
71	GV30694-001A	HEAT SINK		
72	GV40488-001A	LEAF SPRING		
73	QYSBSG3016EA	TAP SCREW	M3 x 16mm(x2)	

△	Symbol No.	Part No.	Part Name	Description	Local
	74	QYSBSG3016EA	TAP SCREW	M3 x 16mm(x2)	
	75	QYSBSG3016EA	TAP SCREW	M3 x 16mm	
	76	GV10255-045A	REAR PANEL		T66EE
	76	GV10255-046A	REAR PANEL		T66US,T66UN
	76	GV10255-043A	REAR PANEL		T66UW
	76	GV10255-047A	REAR PANEL		T66UX,T66UG
	76	GV10255-044A	REAR PANEL		T66UY
	77	GV10263-002A	REAR COVER		
	78	QAU0412-001	TUNER		
	79	GV30686-002A	FAN BKT.		
	80	QAR0405-001	FAN		
	81	GV30349-026A	SPACER		
	82	QYSBSGY3008EA	TAP SCREW	M3 x 8mm	
	83	QYSBSGY3008EA	TAP SCREW	M3 x 8mm(x4)	
	84	QYSBSGY3008EA	TAP SCREW	M3 x 8mm	
	85	QYSBSGY3008EA	TAP SCREW	M3 x 8mm	
	86	QYSBSGY3008EA	TAP SCREW	M3 x 8mm(x2)	
	87	QYSBSGY3008EA	TAP SCREW	M3 x 8mm	
	88	QYSBSGY3008EA	TAP SCREW	M3 x 8mm(x2)	
	89	QYSBSGY3008EA	TAP SCREW	M3 x 8mm(x2)	
	90	QYSBSGY3008EA	TAP SCREW	M3 x 8mm	
	91	QYSBSF3012EA	TAP SCREW	M3 x 12mm(x2)	
	92	QYSBSGY3008EA	TAP SCREW	M3 x 8mm(x8)	
	93	QYSBSGY3008EA	TAP SCREW	M3 x 8mm	
	94	GV30687-002A	FL HOLDER		
	95	GV40327-002A	IC BRD.HOLDER	EP651	
	96	GV30349-021A	SPACER	(x2)	
	97	GV30349-049A	SPACER		
	98	GV40531-002A	LED HOLDER		
△	99	QQT0516-001	POWER TRANSF	T1001	
△	100	QMF51W2-6R3-J8	FUSE	F1001 6.3A AC250V	
△	101	QMF51W2-3R15-J8	FUSE	F1002 3.15A AC250V	
△	102	QMF51W2-6R3-J8	FUSE	F1003 6.3A AC250V	
△	103	QMF51W2-6R3-J8	FUSE	F1004 6.3A AC250V	
△	104	QMF51W2-1R6-J8	FUSE	F1005 1.6A AC250V	
△	105	QMF51W2-3R15-J8	FUSE	F1006 3.15A AC250V	
△	106	QMFZ051-8R0-J8	FUSE	F1007 8A	
△	107	QMFZ051-8R0-J8	FUSE	F1008 8A	
	108	QUQU12-0910BJ-E	FFC WIRE	9pin 10cm	
	109	QUQU12-1010BJ-E	FFC WIRE	10pin 10cm	
	110	QUQU12-2512AJ-E	FFC WIRE	25pin 12cm	
	111	QUQU12-1316AJ-E	FFC WIRE	13pin 16cm	
	112	QUQU12-0808AJ-E	FFC WIRE	8pin 8cm	
	113	QUR110-1910AJ-E	FFC WIRE	19pin 10cm	
	114	QUR110-2823AJ-E	FFC WIRE	28pin 23cm	
	115	QUR110-1016AJ-E	FFC WIRE	10pin 16cm	
	116	QUQU12-1118AJ-E	FFC WIRE	11pin 18cm	
	117	QUQU12-0516BJ-E	FFC WIRE	5pin 16cm	
	118	QUQU12-0813AJ-E	FFC WIRE	8pin 13cm	
	119	QUQU12-1118AJ-E	FFC WIRE	11pin 18cm	
	120	QYSBSG3010ZA	TAP SCREW	M3 x 10mm	
	121	LV42938-001A	LABEL		T66UY

DVD mechanism assembly and parts list (Common)

Block No. M J M M

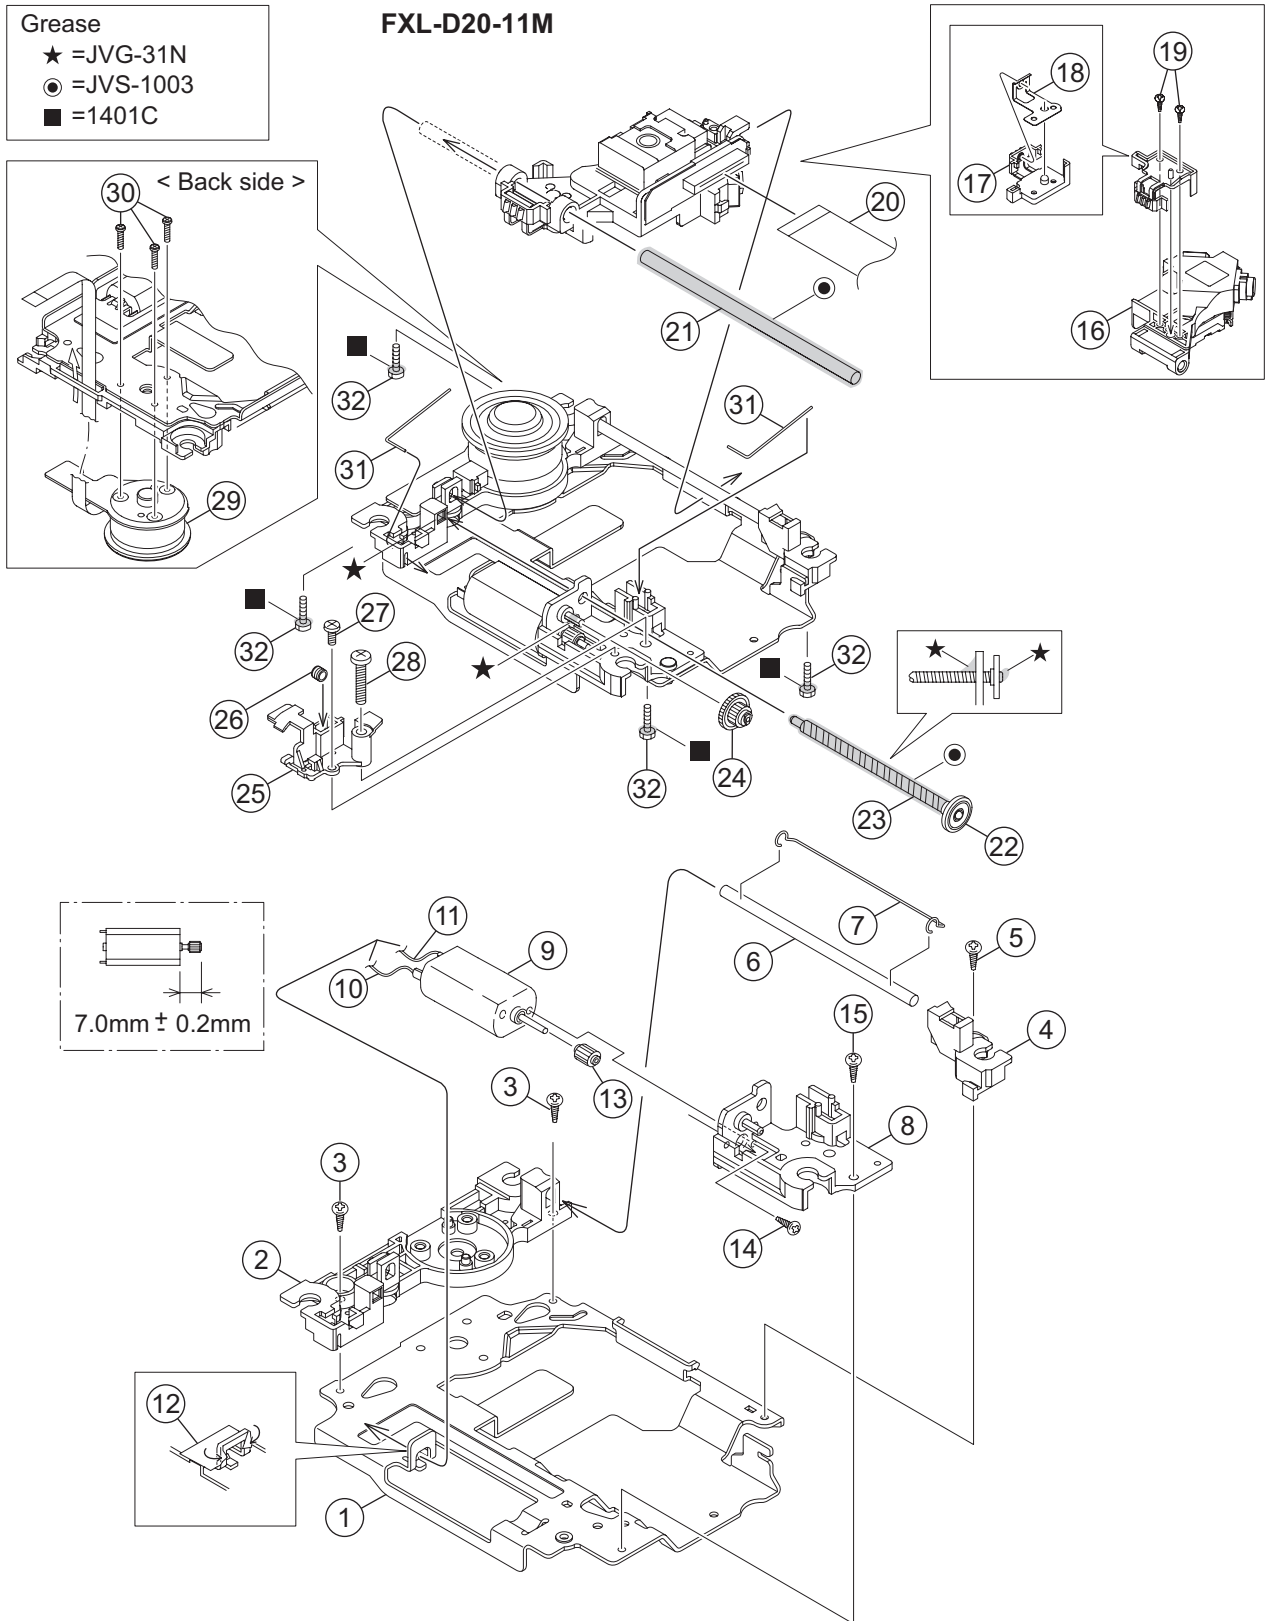

The parts without symbol number are not service.

DVD mechanism (Common)

Block No. [M][J][M][M]

△	Symbol No.	Part No.	Part Name	Description	Local
1		LV22234-001A	TM.CHASSIS		
2		LV22294-001A	C.SPINDLE BASE		
3		QYSDST2005ZA	TAP SCREW	M2 x 5mm(x2)	
4		LV36791-001A	C.G.S.HOLDER		
5		QYSDST2005ZA	TAP SCREW	M2 x 5mm	
6		LV44041-002A	GUIDE SHAFT		
7		LV44479-001A	BAR SPRING		
8		LV22236-001A	FEED HOLDER		
9		QAR0165-001	FEED MOTOR		
10		QUB549-05A1A1-E	SIN TWIST WIRE		
11		QUB544-05A1A1-E	SIN TWIST WIRE		
12		LV30225-0X5A	SPACER		
13		LV36557-001A	F.M.GEAR		
14		QYSPSPT2030MA	SCREW	M2 x 3mm	
15		QYSDST2005ZA	TAP SCREW	M2 x 5mm	
16		QAL0786-004	P.UP		
17		LV22237-001A	RACK ARM		
18		LV36560-001A	RACK ARM SPRING		
19		QYSPSFU1740ZA	TAP SCREW	M1.7 x 4mm(x2)	
20		QUQK05-2415AC-E	FFC WIRE	24pin 15cm	
21		LV44041-002A	GUIDE SHAFT		
22		LV36559-001A	L.S.GEAR		
23		LV41517-003A	LEAD SCREW		
24		LV36558-001A	MIDDLE GEAR		
25		LV36556-001A	SPRING HOLDER		
26		LV44623-001A	COMP.SPRING		
27		QYSDST2005ZA	TAP SCREW	M2 x 5mm	
28		QYSDST2616MA	TAP SCREW	M2.6 x 16mm	
29		QAR0334-002	S.MOTOR		
30		QYSPSPU1775ZA	SCREW	M1.7 x 7.5mm(x3)	
31		LV44042-001A	ROD SPRING	(x2)	
32		LE40858-002A	SPECIAL SCREW	(x4)	

DVD changer mechanism assembly and parts list (DX-T99,DX-T77)

FMU-SB4-1M


Block No. M K M M

Grease

★=JVG-31N

▲=JVS-1003

CH5-BASE-1M

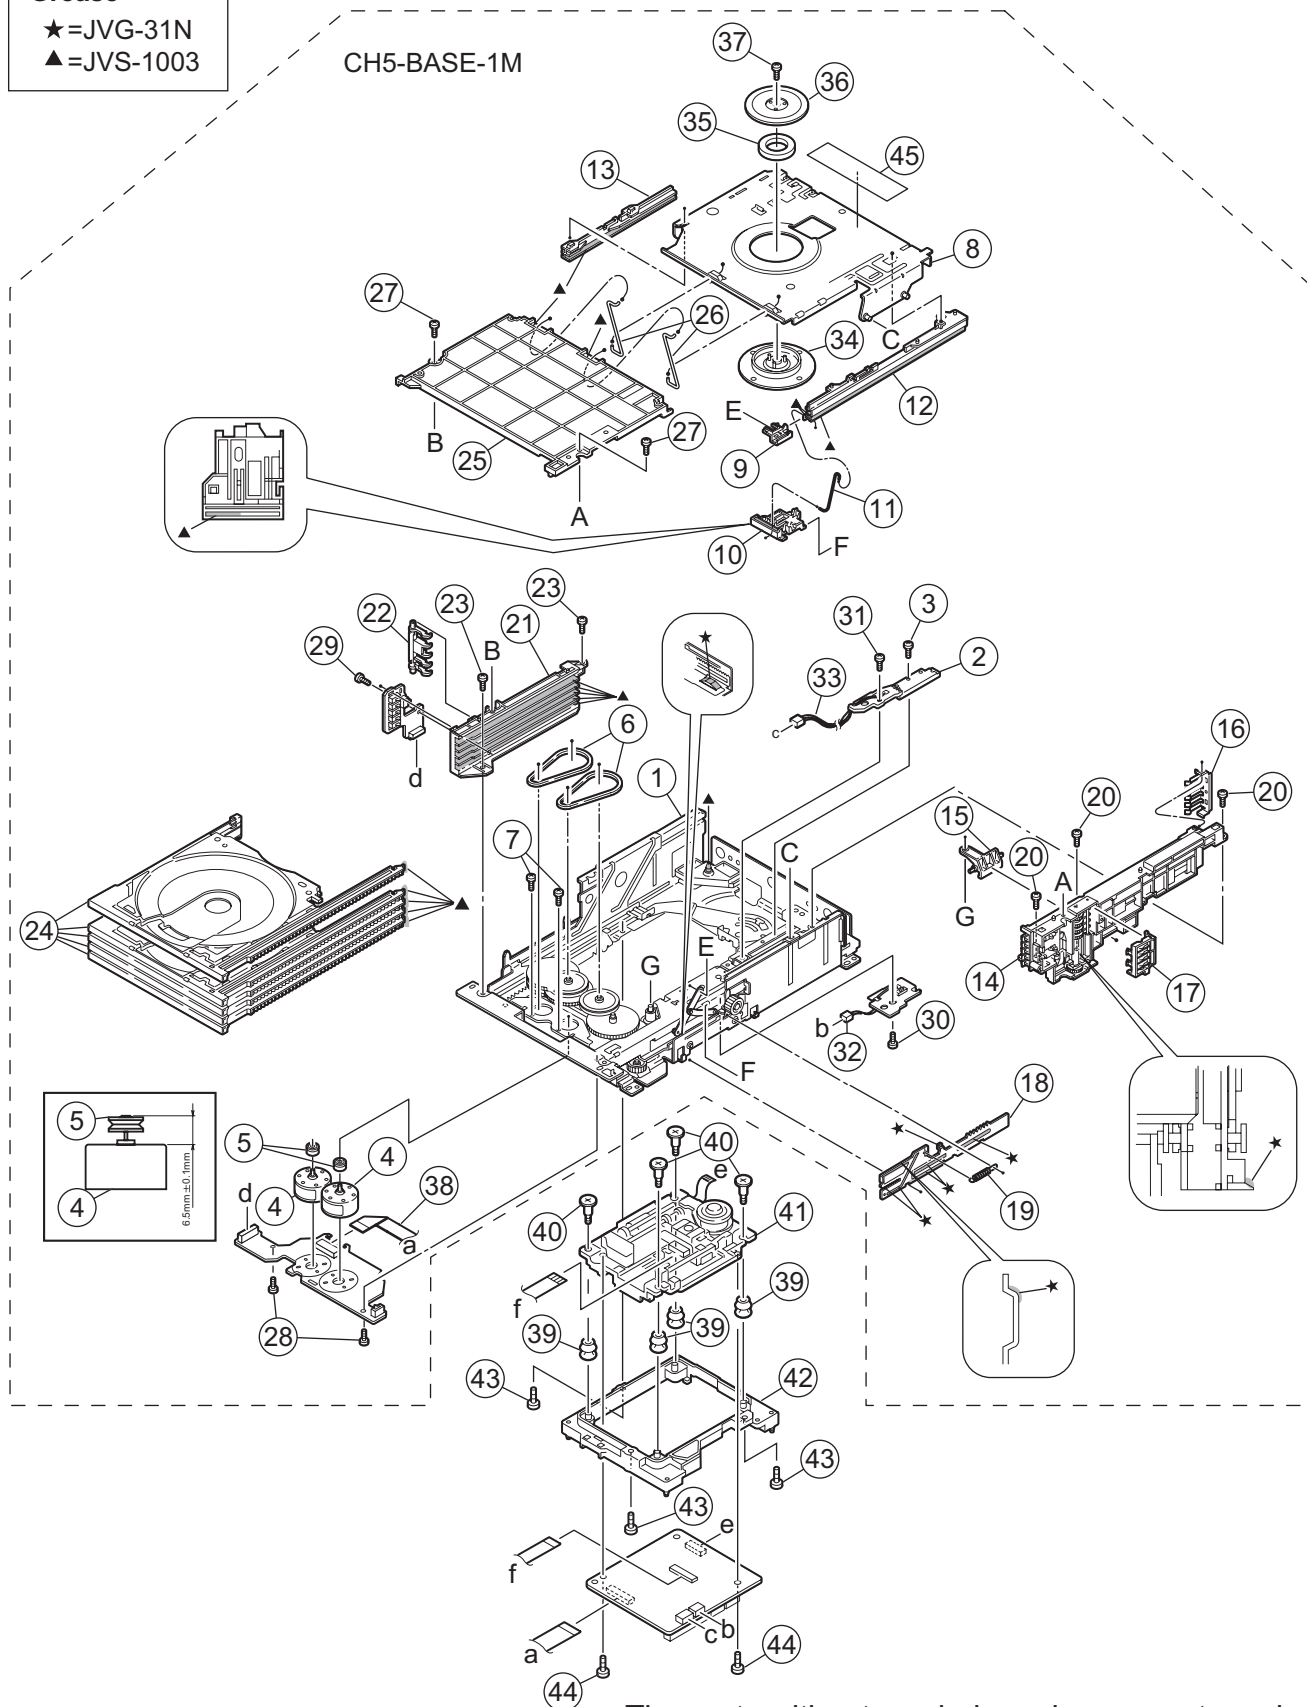

The parts without symbol number are not service.

DVD changer mechanism(FMU-SB4-1M) (DX-T99,DX-T77)

Block No. [M][K][M][M]

△	Symbol No.	Part No.	Part Name	Description	Local
1		LV10913-001A	LOADER ASSY		
2		QVY0027-B14	S V RESISTOR		
3		QYSDST2004Z	SCREW	2mm x 4mm	
4		QAR0164-001	MOTOR	(x2)	
5		LV42340-001A	MOTOR PULLEY	(x2)	
6		LV41431-002A	BELT	(x2)	
7		QYSPSPU1725N	SCREW	1.7mm x 2.5mm(x2)	
8		LV33965-004A	LIFTER ASSY		
9		LV33963-001A	HOOK		
10		LV33964-002A	HOOK STOPPER		
11		LV43285-001A	ROD (L)		
12		LV21408-002A	RAIL(R)		
13		LV21409-002A	RAIL(L)		
14		LV21520-004A	SIDE(R) ASSY		
15		LV33974-001A	SELECT LEVER		
16		LV33977-002A	CLICK SPRING		
17		LV33975-001A	GEAR COVER		
18		LV33976-001A	ELEVATOR CAM		
19		LV43287-001A	ELEVATOR SPRING		
20		QYSDST2605Z	SCREW	2.6mm x 5mm(x3)	
21		LV10749-002A	SIDE(L)		
22		LV33980-001A	OPEN DET.LEVER		
23		QYSDST2605Z	SCREW	2.6mm x 5mm(x2)	
24		LV10746-003A	TRAY ASSY	(x5)	
25		LV10750-002A	TOP COVER		
26		LV43289-002A	ROD	(x2)	
27		QYSDSF2608Z	SCREW	2.6mm x 8mm(x2)	
28		QYSDST2605Z	SCREW	2.6mm x 5mm(x2)	
29		QYSDSF2608Z	SCREW	2.6mm x 8mm	
30		QYSDST2605Z	SCREW	2.6mm x 5mm	
31		QYSDST2004Z	SCREW	2mm x 4mm	
32		WJM0330-002A	E-SI C WIRE C-F		
33		WJM0331-001A	E-SI C WIRE C-F		
34		LV32417-001A	CLAMPER		
35		LV42930-003A	P.C.MAGNET		
36		LV33992-001A	DVD YOKE		
37		LV41741-001A	SPECIAL SCREW		
38		QUQ110-1508BJ	FFC WIRE		
39		LV44043-001A	INSULATOR	(x4)	
40		LV44045-001A	SPECIAL SCREW	(x4)	
41		-----	DVD TRAMECHA		
42		LV11281-001A	TM CB HOLDER		
43		QYSDST2605ZA	TAP SCREW	M2.6 x 5mm(x3)	
44		LV44209-001A	WASHER SCREW	(x2)	
45		LV44603-001A	LASER CATION		

DVD changer mechanism assembly and parts list (DX-T66)

FMU-SB4-11M


Block No. M S M M

Grease

★=JVG-31N

▲=JVS-1003

CH5-BASE-1M

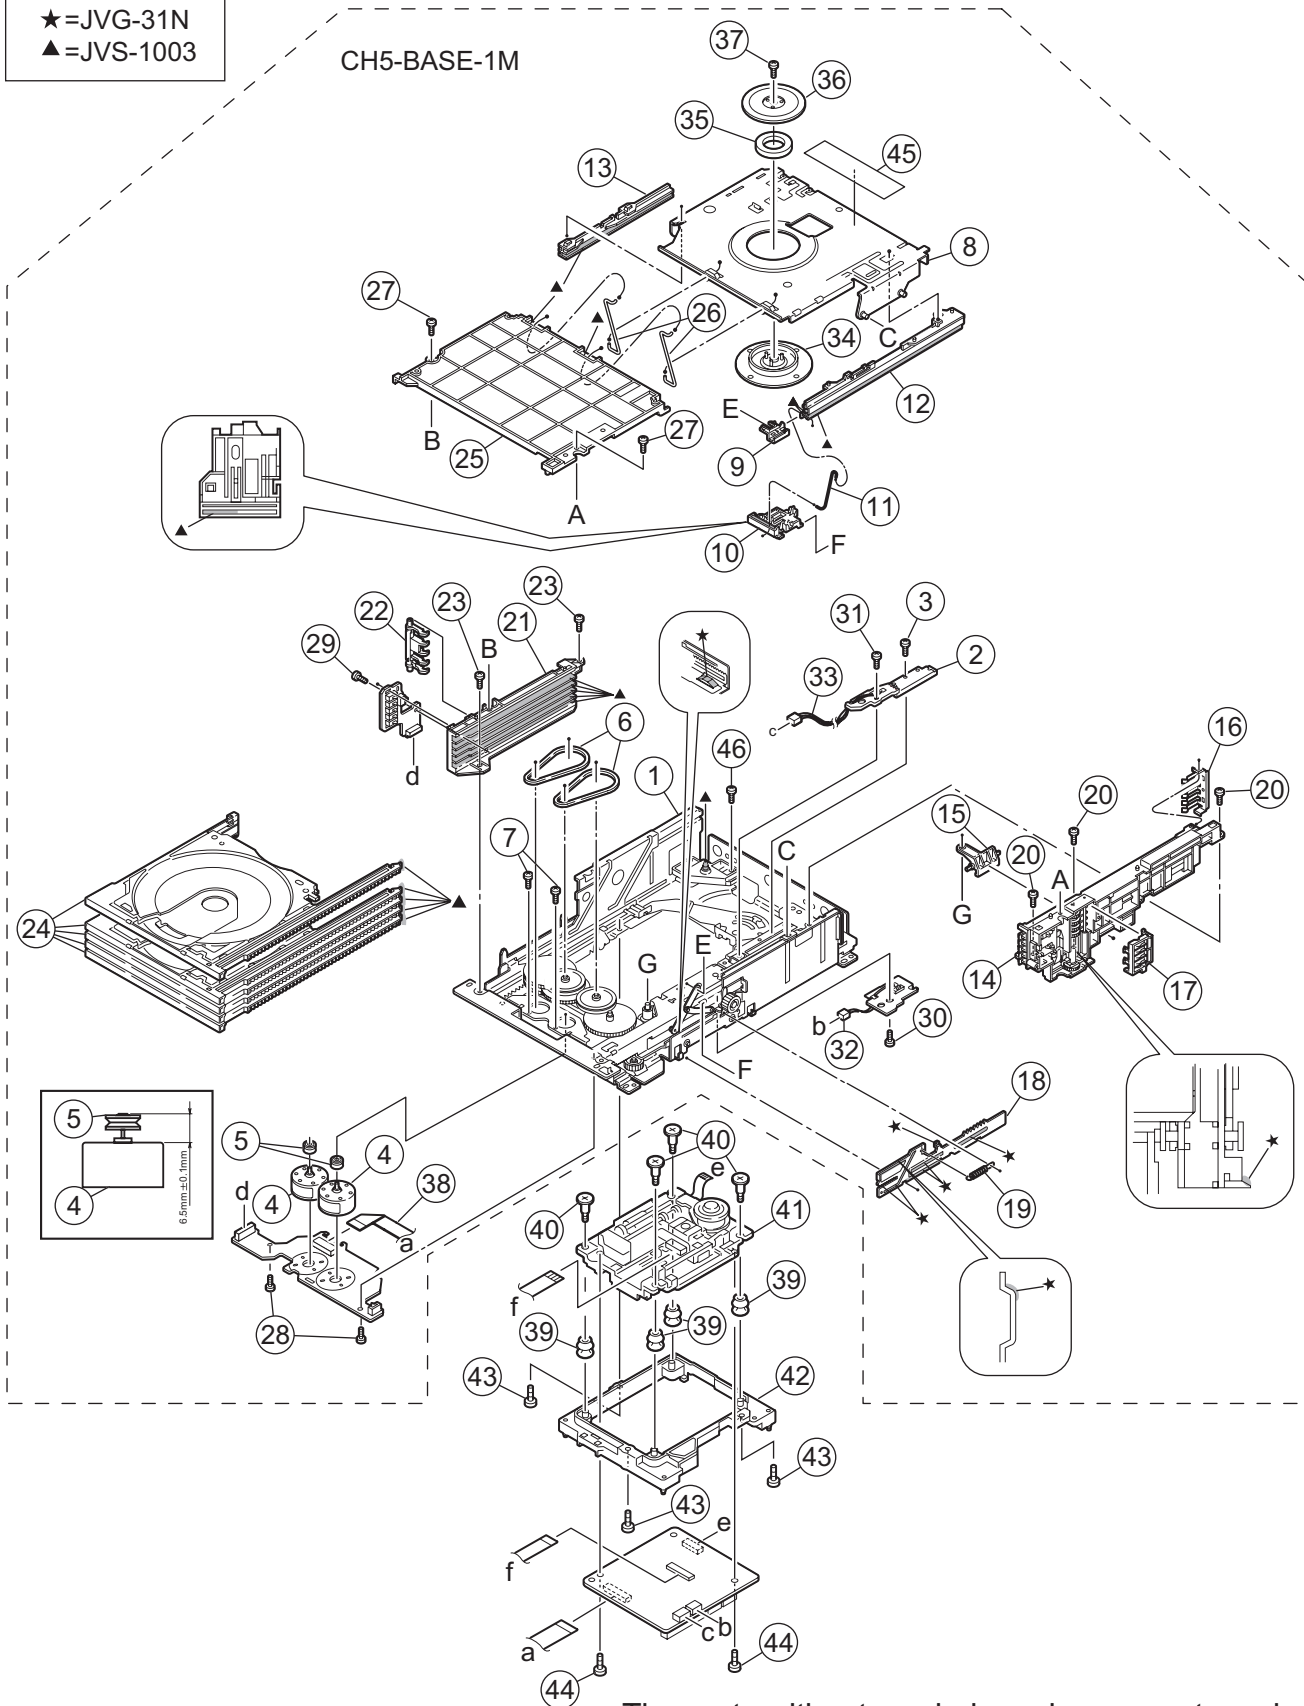

The parts without symbol number are not service.

DVD changer mechanism(FMU-SB4-11M) (DX-T66)

Block No. [M][S][M][M]

△	Symbol No.	Part No.	Part Name	Description	Local
1		LV10913-008A	LOADER ASSY		
2		QVY0027-B14	S V RESISTOR		
3		QYSDST2004ZA	TAP SCREW	M2 x 4mm	
4		QAR0164-001	MOTOR	(x2)	
5		LV42340-001A	MOTOR PULLEY	(x2)	
6		LV41431-002A	BELT	(x2)	
7		QYSPSPU1725NA	SCREW	M1.7 x 2.5mm(x2)	
8		LV33965-010A	LIFTER ASSY		
9		LV33963-001A	HOOK		
10		LV33964-002A	HOOK STOPPER		
11		LV43285-001A	ROD (L)		
12		LV21408-003A	RAIL (R)		
13		LV21409-002A	RAIL(L)		
14		LV21520-005A	SIDE(R) ASSY		
15		LV33974-002A	SELECT LEVER		
16		LV33977-002A	CLICK SPRING		
17		LV33975-001A	GEAR COVER		
18		LV33976-002A	ELEVATOR CAM		
19		LV43287-001A	ELEVATOR SPRING		
20		QYSDST2605ZA	TAP SCREW	M2.6 x 5mm(x3)	
21		LV10749-003A	SIDE(L)		
22		LV33980-002A	OPEN DET.LEVER		
23		QYSDST2605ZA	TAP SCREW	M2.6 x 5mm(x2)	
24		LV10746-007A	TRAY ASSY	(x5)	
25		LV10750-002A	TOP COVER		
26		LV43289-003A	ROD	(x2)	
27		QYSDSF2608ZA	TAP SCREW	M2.6 x 8mm(x2)	
28		QYSDST2605ZA	TAP SCREW	M2.6 x 5mm(x2)	
29		QYSDSF2608ZA	TAP SCREW	M2.6 x 8mm	
30		QYSDST2605ZA	TAP SCREW	M2.6 x 5mm	
31		QYSDST2004ZA	TAP SCREW	M2 x 4mm	
32		WJM0330-002A-E	E-SI C WIRE C-F		
33		WJM0331-001A-E	E-SI C WIRE C-F		
34		LV32417-001A	CLAMPER		
35		LV42930-003A	P.C.MAGNET		
36		LV33992-001A	DVD YOKE		
37		LE40906-002A	SPECIAL SCREW		
38		QUQW10-1508BJ-E	FFC WIRE	15pin 8cm	
39		LV44043-001A	INSULATOR	(x4)	
40		LV44045-001A	SPECIAL SCREW	(x4)	
41		-----	DVD TRAMECHA		
42		LV11281-001A	TM CB HOLDER		
43		QYSDST2605ZA	TAP SCREW	M2.6 x 5mm(x3)	
44		LV44209-001A	WASHER SCREW	(x2)	
45		LV44603-003A	LASER CAUTION		
46		QYSDST2605ZA	TAP SCREW	M2.6 x 5mm	


Cassette mechanism assembly and parts list-CassetteA (Common)

Block No. M P M M

Grease

- ★ =EM-30L
- ▲ =UD-24
- =LEN-320M
- ◎ =MOBIL-1

SLC-S401M

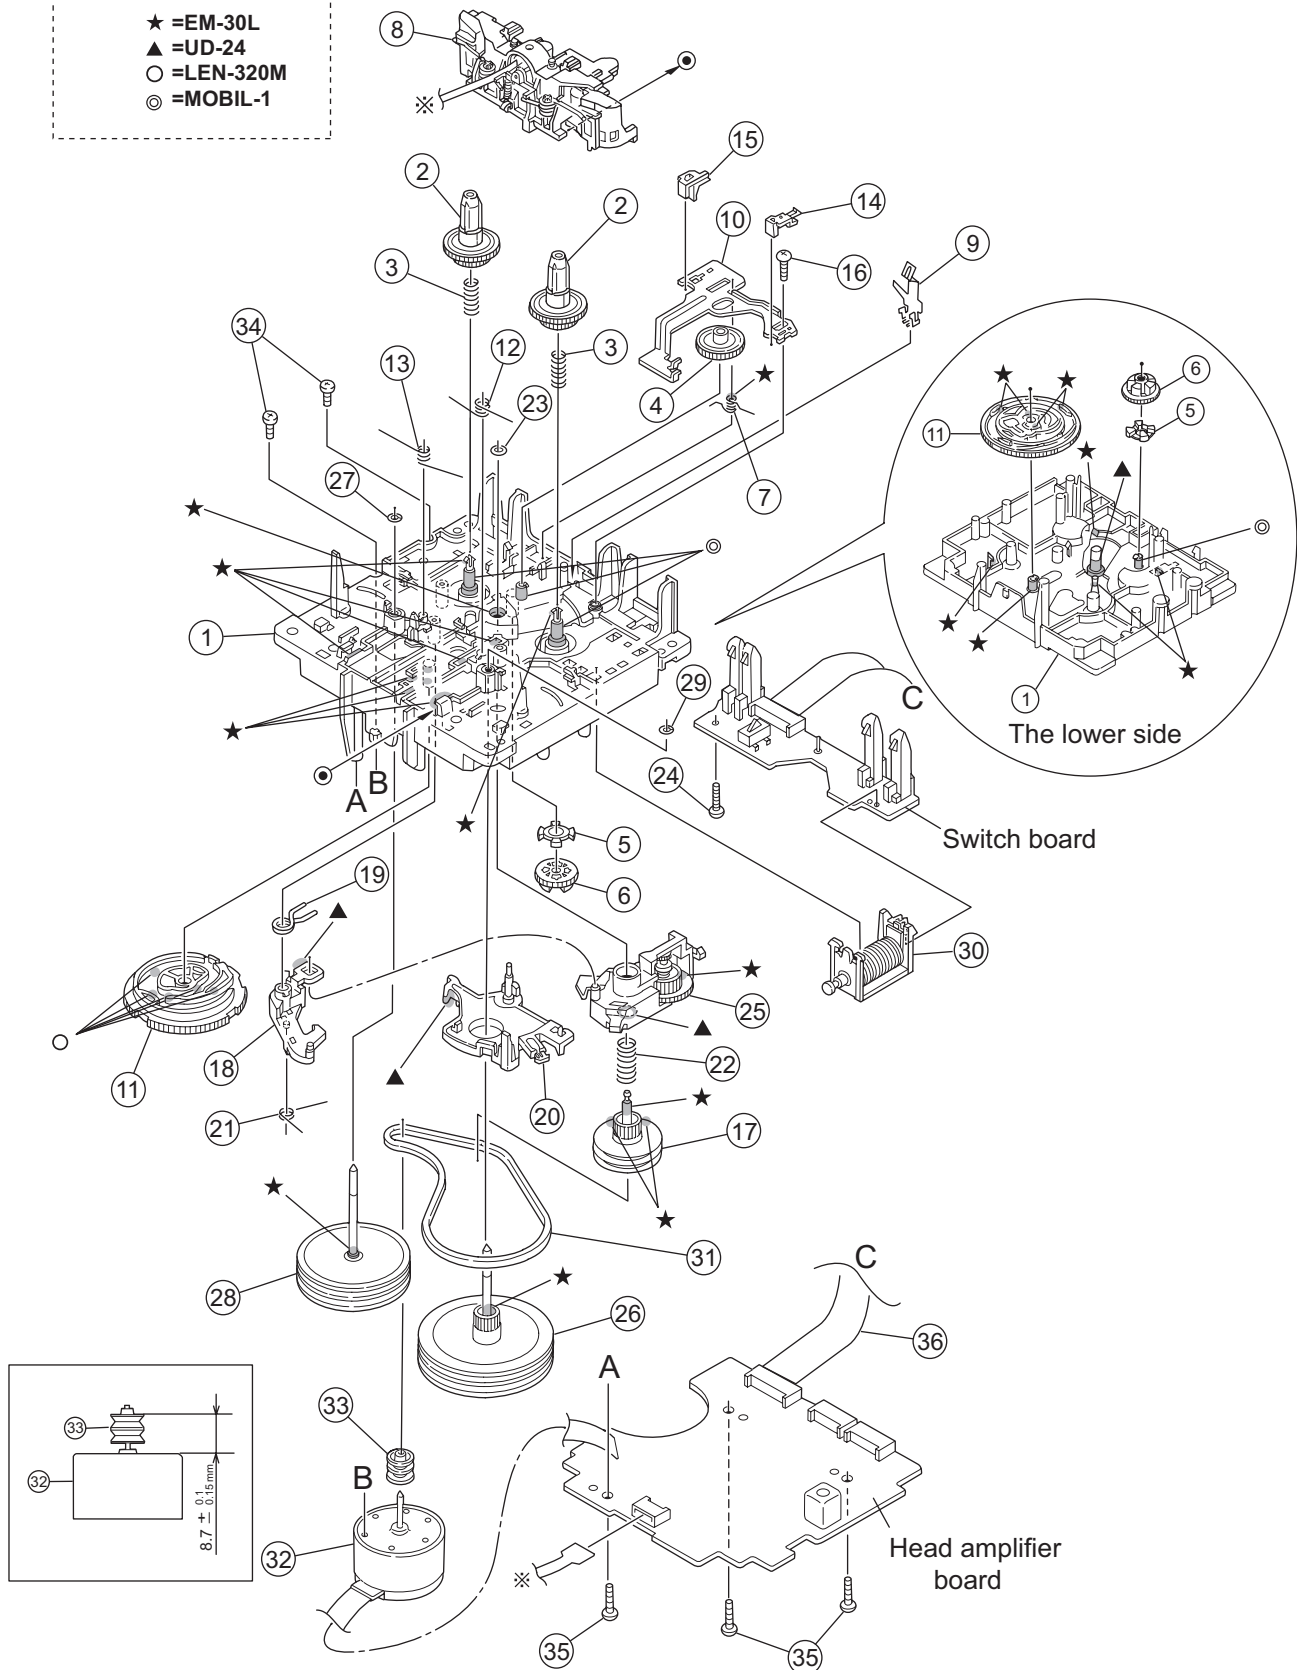

The parts without symbol number are not service.

DVD changer mechanism(SLC-S401M)-CassetteA (Common)

Block No. [M][P][M][M]

△	Symbol No.	Part No.	Part Name	Description	Local
	1	VKS1165-00N	CHASSIS B. ASSY		
	2	VKS2274-002	REEL GEAR	(x2)	
	3	VKW5286-002	B.T. SPRING	(x2)	
	4	VKS5559-001	PLAY IDLE GEAR		
	5	VKS5595-002	BLIND		
	6	VKS5560-003	FR IDLE GEAR		
	7	LV42013-001A	EARTH SPRING		
	8	VKS2279-00GSS	HEAD MOUNT ASSY		
	9	VKY3149-002	CASSETTE SP.		
	10	LV31786-004A	PLAY SW LEVER		
	11	VKS1166-003	CONTROL CAM		
	12	VKW5279-002	HEAD BASE SP(R)		
	13	VKW5280-001	HEAD BASE SP(L)		
	14	LV41584-001A	BRAKE(R)		
	15	LV41585-003A	BRAKE(L)		
	16	LV44098-001A	SPECIAL SCREW		
	17	VKS5603-00H	MAIN PULLEY ASS		
	18	VKS3785-001MM	FR ARM		
	19	VKW5284-002	SWING SPRING		
	20	VKS2278-003	TRIGGER ARM		
	21	VKW5301-001	FR SPRING		
	22	VKW5266-001	ELEVATOR SPRING		
	23	WDL214025	WASHER		
	24	QYSBSF2005ZA	TAP SCREW	M2 x 5mm	
	25	VKS3786-00G	CLUTCH ASSY		
	26	VKF3205-00B	F.WHEEL ASSY(R)		
	27	WDL183425	SLIT WASHER		
	28	VKF3207-00C	F.WHEEL ASSY(L)		
	29	WDL173525-6	SLIT WASHER		
	30	VKZ3174-00B	DC SOLENOID		
	31	LV42836-001A	CAPSTAN BELT		
	32	QAR0309-001	D.C.MOTOR		
	33	VKR4761-003	MOTOR PULLEY		
	34	QYSPSP2604ZA	SCREW	M2.6 x 4mm(x2)	
	35	QYSBSF2608ZA	TAP SCREW	M2.6 x 8mm(x3)	
	36	QUQH12-0906BF	FFC WIRE	9pin 6cm	


Cassette mechanism assembly and parts list-CassetteB (Common)

Block No. M Q M M

SLC-S304M

Grease

- ★ =EM-30L
- ▲ =UD-24
- =LEN-320M
- ◎ =MOBIL-1

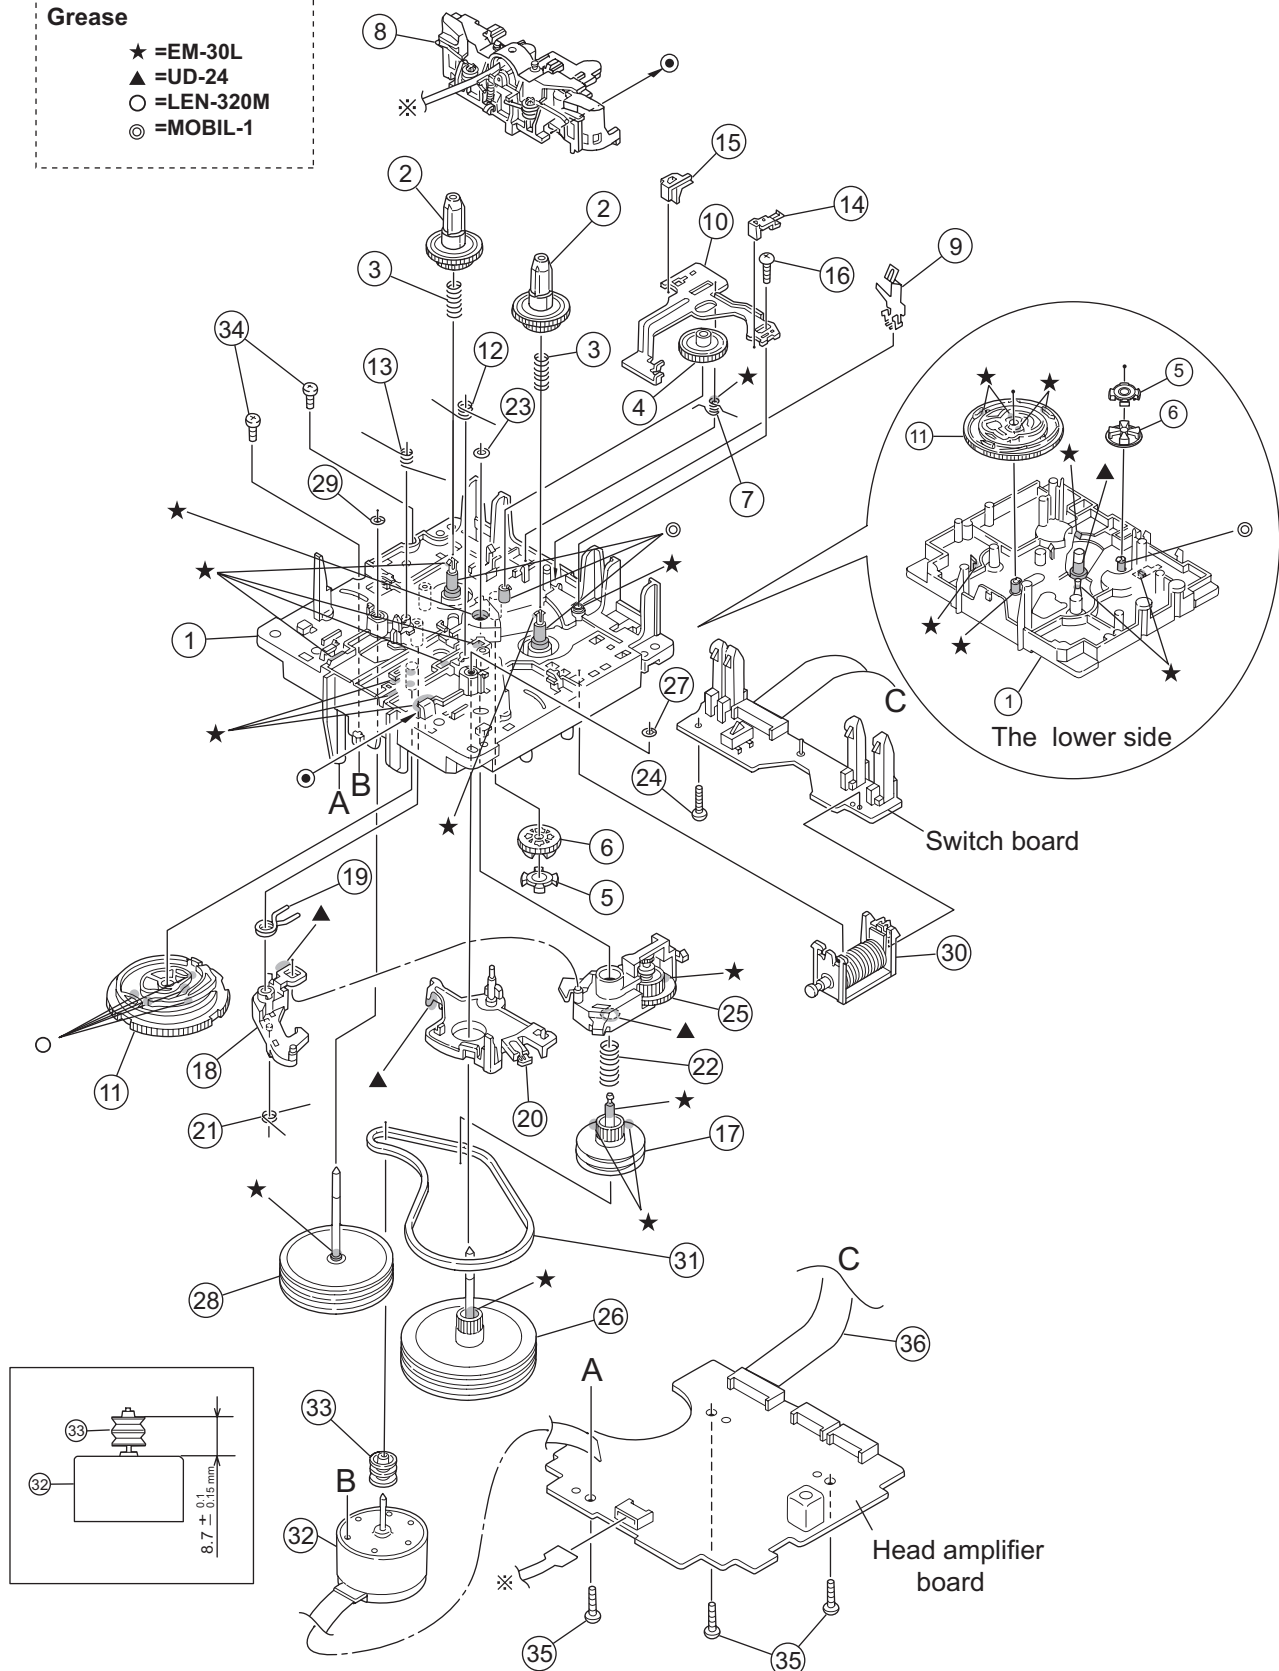

The parts without symbol number are not service.

DVD changer mechanism(SLC-S304M)-CassetteB (Common)

Block No. [M][Q][M][M]

△	Symbol No.	Part No.	Part Name	Description	Local
	1	VKS1165-00N	CHASSIS B. ASSY		
	2	VKS2274-002	REEL GEAR	(x2)	
	3	VKW5286-002	B.T. SPRING	(x2)	
	4	VKS5559-001	PLAY IDLE GEAR		
	5	VKS5595-002	BLIND		
	6	VKS5560-003	FR IDLE GEAR		
	7	LV42013-001A	EARTH SPRING		
	8	SLC-RP4SVM	HEAD MOUNT ASSY		
	9	VKY3149-002	CASSETTE SP.		
	10	LV31786-004A	PLAY SW LEVER		
	11	VKS1166-003	CONTROL CAM		
	12	VKW5279-002	HEAD BASE SP(R)		
	13	VKW5280-001	HEAD BASE SP(L)		
	14	LV41584-001A	BRAKE(R)		
	15	LV41585-003A	BRAKE(L)		
	16	LV44098-001A	SPECIAL SCREW		
	17	VKS5603-00H	MAIN PULLEY ASS		
	18	VKS3785-001MM	FR ARM		
	19	VKW5284-002	SWING SPRING		
	20	VKS2278-003	TRIGGER ARM		
	21	VKW5301-001	FR SPRING		
	22	VKW5266-001	ELEVATOR SPRING		
	23	QYWDL2140352	SLIT WASHER	4mm/2.1mm x 0.35mm	
	24	QYSBSF2005ZA	TAP SCREW	M2 x 5mm	
	25	VKS3786-00G	CLUTCH ASSY		
	26	VKF3205-00B	F.WHEEL ASSY(R)		
	27	QYWDL183425	SLIT WASHER	3.4mm/1.8mm x 0.25mm	
	28	VKF3207-00C	F.WHEEL ASSY(L)		
	29	QYWDL1735256	SLIT WASHER	3.5mm/1.7mm x 0.25mm	
	30	VKZ3174-00B	DC SOLENOID		
	31	LV42836-001A	CAPSTAN BELT		
	32	QAR0309-001	D.C.MOTOR		
	33	VKR4761-003	MOTOR PULLEY		
	34	QYSPSP2604ZA	SCREW	M2.6 x 4mm(x2)	
	35	QYSBSF2608ZA	TAP SCREW	M2.6 x 8mm(x3)	
	36	QUQH12-0906BF-E	FFC WIRE	9pin 6cm	

Electrical parts list

Main board (DX-T99)

Block No. [0][1]

△ Symbol No.	Part No.	Part Name	Description	Local
IC760	SN74AHCT08NS-X	IC		
IC770	MN101C49GFA	MASK MICON		
IC771	BR24L02F-W-X	IC(DIGITAL)		
IC800	RC4558D-X	IC		
IC801	RC4558D-X	IC		
IC810	CD4066BM-X	IC		
IC820	LC75342M-X	IC		
IC830	RC4558D-X	IC		
IC850	M65851FP	IC		
IC860	JCV8011-X	IC		
IC870	LC75342M-X	IC		
IC880	LC75342M-X	IC		
IC881	RC4558D-X	IC		
IC888	RC4558D-X	IC		
IC901	RC4580ID-X	IC		
Q7000	KTC3199/GL/-T	TRANSISTOR		
Q7010	KTC3199/GL/-T	TRANSISTOR		
Q7080	KRC107S-X	DIGI TRANSISTOR		
Q7081	KRC111S-X	TRANSISTOR		
Q7788	KRA102S-X	DIGI TRANSISTOR		
Q7794	KRA102S-X	DIGI TRANSISTOR		
Q7798	KRA102S-X	DIGI TRANSISTOR		
Q8000	KTC2875-X	CHIP TR.		
Q8030	KTC3875/YG/-X	TRANSISTOR		
Q8031	KTC3875/YG/-X	TRANSISTOR		
Q8032	KTC3875/YG/-X	TRANSISTOR		
Q8040	KTC2875-X	CHIP TR.		
Q8070	KTC2875-X	CHIP TR.		
Q8071	KTC2875-X	CHIP TR.		
Q8080	KTC2875-X	CHIP TR.		
Q8081	KTC2875-X	CHIP TR.		
Q8100	KTC2875-X	CHIP TR.		
Q8130	KTC3875/YG/-X	TRANSISTOR		
Q8131	KTC3875/YG/-X	TRANSISTOR		
Q8132	KTC3875/YG/-X	TRANSISTOR		
Q8140	KTC2875-X	CHIP TR.		
Q8170	KTC2875-X	CHIP TR.		
Q8171	KTC2875-X	CHIP TR.		
Q8180	KTC2875-X	CHIP TR.		
Q8211	KRC104S-X	TRANSISTOR		
Q8212	KRC104S-X	TRANSISTOR		
Q8260	KTC3199/GL/-T	TRANSISTOR		
Q8401	KRC109S-X	TRANSISTOR		
Q8524	KTC3203/OY/-T	TRANSISTOR		
Q8900	KRA104S-X	DIGI TRANSISTOR		
Q9001	KTC3875/YG/-X	TRANSISTOR		
Q9002	KTC3875/YG/-X	TRANSISTOR		
Q9100	KRA111S-X	D. TRANSISTOR		
Q9101	KTC2875-X	CHIP TR.		
Q9102	KTC2875-X	CHIP TR.		
Q9103	KTC2875-X	CHIP TR.		
Q9104	KTC2875-X	CHIP TR.		
D7000	1SS133-T2	SI DIODE		
D7001	1SS133-T2	SI DIODE		
D7011	1SS133-T2	SI DIODE		
D7012	1SS133-T2	SI DIODE		
D7050	MTZJ5.1B-T2	Z DIODE		
D7080	1SS133-T2	SI DIODE		
D7081	MTZJ4.7B-T2	Z DIODE		
D7082	1SS133-T2	SI DIODE		
D7151	1SS133-T2	SI DIODE		
D7152	1SS133-T2	SI DIODE		
D7153	1SS133-T2	SI DIODE		
D7154	1SS133-T2	SI DIODE		
D7155	1SS133-T2	SI DIODE		
D7156	1SS133-T2	SI DIODE		
D7157	1SS133-T2	SI DIODE		
D7330	1N4003S-T5	SI DIODE		
D7350	1N4003S-T5	SI DIODE		
D7390	1SS133-T2	SI DIODE		

△ Symbol No.	Part No.	Part Name	Description	Local
D7711	1SS133-T2	SI DIODE		
D7713	1N4003S-T5	SI DIODE		
D8230	1SS133-T2	SI DIODE		
D8401	1SS133-T2	SI DIODE		
D8524	MTZJ5.6B-T2	Z DIODE		
D9001	1SS133-T2	SI DIODE		
D9002	1SS133-T2	SI DIODE		
C7050	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	T99A,T99EE, T99US,T99UX, T99UG,T99UN T99UW
C7050	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C7080	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C7082	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
C7083	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C7085	QETN0JM-108Z	E CAPACITOR	1000uF 6.3V M	
C7710	QCB1HK-103Y	C CAPACITOR	0.01uF 50V K	
C7711	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C7712	NCS31HJ-200X	C CAPACITOR	20pF 50V J	
C7713	NCS31HJ-180X	C CAPACITOR	18pF 50V J	
C7788	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C7794	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C7798	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C8000	QTE1V06-106Z	E CAPACITOR	10uF 35V	
C8001	QTE1V06-106Z	E CAPACITOR	10uF 35V	
C8002	QTE1V06-106Z	E CAPACITOR	10uF 35V	
C8003	NCS31HJ-151X	C CAPACITOR	150pF 50V J	
C8020	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
C8021	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
C8022	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
C8023	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
C8025	QTE1H28-106Z	E CAPACITOR	10uF 50V	
C8026	QFG32AJ-472Z	PP CAPACITOR	4700pF 100V J	
C8027	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
C8028	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
C8030	QFVF1HJ-224Z	MF CAPACITOR	0.22uF 50V J	
C8031	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
C8032	QTE1H28-106Z	E CAPACITOR	10uF 50V	
C8060	QTE1V06-106Z	E CAPACITOR	10uF 35V	
C8061	QTE1V06-106Z	E CAPACITOR	10uF 35V	
C8062	QTE1V06-106Z	E CAPACITOR	10uF 35V	
C8070	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C8072	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C8074	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
C8076	QETN1HM-104Z	E CAPACITOR	0.1uF 50V M	
C8080	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C8082	QETN1HM-104Z	E CAPACITOR	0.1uF 50V M	
C8083	QETN1HM-104Z	E CAPACITOR	0.1uF 50V M	
C8084	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
C8085	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
C8086	QETN1HM-104Z	E CAPACITOR	0.1uF 50V M	
C8100	QTE1V06-106Z	E CAPACITOR	10uF 35V	
C8101	QTE1V06-106Z	E CAPACITOR	10uF 35V	
C8102	QTE1V06-106Z	E CAPACITOR	10uF 35V	
C8103	NCS31HJ-151X	C CAPACITOR	150pF 50V J	
C8120	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
C8121	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
C8122	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
C8123	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
C8125	QTE1H28-106Z	E CAPACITOR	10uF 50V	
C8126	QFG32AJ-472Z	PP CAPACITOR	4700pF 100V J	
C8127	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
C8128	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
C8130	QFVF1HJ-224Z	MF CAPACITOR	0.22uF 50V J	
C8131	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
C8132	QTE1H28-106Z	E CAPACITOR	10uF 50V	
C8160	QTE1V06-106Z	E CAPACITOR	10uF 35V	
C8161	QTE1V06-106Z	E CAPACITOR	10uF 35V	
C8162	QTE1V06-106Z	E CAPACITOR	10uF 35V	
C8170	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C8172	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C8173	QETN1HM-104Z	E CAPACITOR	0.1uF 50V M	
C8174	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
C8176	QETN1HM-104Z	E CAPACITOR	0.1uF 50V M	
C8180	QFLC1HJ-123Z	M CAPACITOR	0.012uF 50V J	
C8181	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
C8182	QFLC1HJ-153Z	M CAPACITOR	0.015uF 50V J		C9004	QEK1H1M-474Z	E CAPACITOR	0.47uF 50V M	
C8184	QETN1HM-106Z	E CAPACITOR	10uF 50V M		C9005	QEK1H1M-104Z	E CAPACITOR	0.1uF 50V M	
C8185	QETN1HM-106Z	E CAPACITOR	10uF 50V M		C9006	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
C8202	QETN1HM-106Z	E CAPACITOR	10uF 50V M		C9007	QEK1H1M-104Z	E CAPACITOR	0.1uF 50V M	
C8203	QFLC1HJ-223Z	M CAPACITOR	0.022uF 50V J		C9008	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
C8204	QFLC1HJ-223Z	M CAPACITOR	0.022uF 50V J		C9009	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
C8221	QCB1HK-103Y	C CAPACITOR	0.01uF 50V K		C9010	QEK1CM-107Z	E CAPACITOR	100uF 16V M	
C8222	QTE1C06-107Z	E CAPACITOR	100uF 16V		C9021	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C8230	QETN1EM-476Z	E CAPACITOR	47uF 25V M		C9022	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C8232	QETN1HM-105Z	E CAPACITOR	1uF 50V M		C9030	NDC31HJ-680X	C CAPACITOR	68pF 50V J	
C8261	QETN1EM-476Z	E CAPACITOR	47uF 25V M		C9031	NDC31HJ-680X	C CAPACITOR	68pF 50V J	
C8262	QFLC1HJ-223Z	M CAPACITOR	0.022uF 50V J		C9032	NDC31HJ-680X	C CAPACITOR	68pF 50V J	
C8263	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M		C9033	NDC31HJ-680X	C CAPACITOR	68pF 50V J	
C8264	QETN1HM-106Z	E CAPACITOR	10uF 50V M		C9034	QEK1H1M-474Z	E CAPACITOR	0.47uF 50V M	
C8265	QETN1HM-106Z	E CAPACITOR	10uF 50V M		C9101	QDGB1HK-102Y	C CAPACITOR	1000pF 50V K	
C8266	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M		C9102	QDGB1HK-102Y	C CAPACITOR	1000pF 50V K	
C8267	QETN1EM-336Z	E CAPACITOR	33uF 25V M		C9103	QDXB1CM-392Y	C CAPACITOR	3900pF 16V M	
C8268	QETN1HM-224Z	E CAPACITOR	0.22uF 50V M		C9104	QDXB1CM-392Y	C CAPACITOR	3900pF 16V M	
C8269	QETN1HM-105Z	E CAPACITOR	1uF 50V M		C9105	QDGB1HK-102Y	C CAPACITOR	1000pF 50V K	
C8272	QETN1CM-107Z	E CAPACITOR	100uF 16V M						
C8282	QETN1CM-107Z	E CAPACITOR	100uF 16V M		R7000	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	
C8360	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M		R7001	QRL01DJ-101X	OMF RESISTOR	100Ω 1W J	
C8361	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M		R7002	QRL01DJ-101X	OMF RESISTOR	100Ω 1W J	
C8362	QETN1HM-474Z	E CAPACITOR	0.47uF 50V M		R7003	QRL01DJ-101X	OMF RESISTOR	100Ω 1W J	
C8363	QETN1EM-476Z	E CAPACITOR	47uF 25V M		R7004	QRL01DJ-101X	OMF RESISTOR	100Ω 1W J	
C8401	QETN1EM-476Z	E CAPACITOR	47uF 25V M		R7005	QRL01DJ-101X	OMF RESISTOR	100Ω 1W J	
C8403	QETN1HM-106Z	E CAPACITOR	10uF 50V M		R7006	QRL01DJ-101X	OMF RESISTOR	100Ω 1W J	
C8430	NCB31HK-222X	C CAPACITOR	2200pF 50V K		R7010	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	
C8431	NCB31HK-222X	C CAPACITOR	2200pF 50V K		R7011	QRL01DJ-101X	OMF RESISTOR	100Ω 1W J	
C8432	NCB31HK-222X	C CAPACITOR	2200pF 50V K		R7012	QRL01DJ-101X	OMF RESISTOR	100Ω 1W J	
C8433	NCB31HK-222X	C CAPACITOR	2200pF 50V K		R7013	QRL01DJ-101X	OMF RESISTOR	100Ω 1W J	
C8434	QETN1HM-105Z	E CAPACITOR	1uF 50V M		R7014	QRL01DJ-101X	OMF RESISTOR	100Ω 1W J	
C8437	QETN1HM-104Z	E CAPACITOR	0.1uF 50V M		R7015	QRL01DJ-101X	OMF RESISTOR	100Ω 1W J	
C8502	QFLC1HJ-152Z	M CAPACITOR	1500pF 50V J		R7016	QRL01DJ-101X	OMF RESISTOR	100Ω 1W J	
C8504	QFLC1HJ-152Z	M CAPACITOR	1500pF 50V J		R7050	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J	
C8506	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M		R7080	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
C8508	QFLC1HJ-102Z	M CAPACITOR	1000pF 50V J		R7081	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C8509	QFLC1HJ-332Z	M CAPACITOR	3300pF 50V J		R7082	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C8512	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M		R7083	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
C8513	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M		R7084	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J	
C8514	QFLC1HJ-102Z	M CAPACITOR	1000pF 50V J		R7085	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J	
C8515	QFLC1HJ-472Z	M CAPACITOR	4700pF 50V J		R7151	QRE141J-123Y	C RESISTOR	12kΩ 1/4W J	
C8516	QFLC1HJ-683Z	M CAPACITOR	0.068uF 50V J		R7152	QRE141J-123Y	C RESISTOR	12kΩ 1/4W J	
C8520	QFLC1HJ-683Z	M CAPACITOR	0.068uF 50V J		R7153	QRE141J-123Y	C RESISTOR	12kΩ 1/4W J	
C8522	QETN1EM-476Z	E CAPACITOR	47uF 25V M		R7154	QRE141J-123Y	C RESISTOR	12kΩ 1/4W J	
C8524	QETN1CM-107Z	E CAPACITOR	100uF 16V M		R7155	QRE141J-123Y	C RESISTOR	12kΩ 1/4W J	
C8531	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R7156	QRE141J-123Y	C RESISTOR	12kΩ 1/4W J	
C8539	QETN1HM-104Z	E CAPACITOR	0.1uF 50V M		R7157	QRE141J-123Y	C RESISTOR	12kΩ 1/4W J	
C8540	QFLC1HJ-102Z	M CAPACITOR	1000pF 50V J		R7200	QRE141J-273Y	C RESISTOR	27kΩ 1/4W J	
C8541	QFLC1HJ-472Z	M CAPACITOR	4700pF 50V J		R7251	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	
C8542	QFLC1HJ-683Z	M CAPACITOR	0.068uF 50V J		R7252	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	
C8546	QFLC1HJ-683Z	M CAPACITOR	0.068uF 50V J						
C8548	QFLC1HJ-102Z	M CAPACITOR	1000pF 50V J		R7253	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	T99A,T99EE, T99US,T99UX, T99UG,T99UN
C8550	QFLC1HJ-472Z	M CAPACITOR	4700pF 50V J						
C8551	QETN1HM-105Z	E CAPACITOR	1uF 50V M		R7253	QRE141J-242Y	C RESISTOR	2.4kΩ 1/4W J	
C8553	QETN1HM-106Z	E CAPACITOR	10uF 50V M		R7254	QRE141J-272Y	C RESISTOR	2.7kΩ 1/4W J	
C8555	QETN1CM-107Z	E CAPACITOR	100uF 16V M		R7255	QRE141J-272Y	C RESISTOR	2.7kΩ 1/4W J	
C8556	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R7256	QRE141J-272Y	C RESISTOR	2.7kΩ 1/4W J	
C8572	QFLC1HJ-223Z	M CAPACITOR	0.022uF 50V J						
C8574	QTE1V06-106Z	E CAPACITOR	10uF 35V		R7257	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	T99A,T99EE, T99US,T99UX, T99UG,T99UN
C8575	QTE1V06-106Z	E CAPACITOR	10uF 35V						
C8576	QFVF1HJ-154Z	MF CAPACITOR	0.15uF 50V J		R7257	QRE141J-242Y	C RESISTOR	2.4kΩ 1/4W J	T99UW
C8578	QETN1HM-105Z	E CAPACITOR	1uF 50V M		R7600	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
C8579	QETN1HM-105Z	E CAPACITOR	1uF 50V M		R7702	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
C8581	NCB31AK-154X	C CAPACITOR	0.15uF 10V K		R7703	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C8583	NCB31AK-154X	C CAPACITOR	0.15uF 10V K		R7704	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C8590	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R7705	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C8591	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R7706	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C8593	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R7707	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
C8597	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R7708	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
C8598	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R7709	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
C8810	QETN1CM-107Z	E CAPACITOR	100uF 16V M		R7715	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C8900	QETN1HM-105Z	E CAPACITOR	1uF 50V M		R7717	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C8902	QETN1HM-106Z	E CAPACITOR	10uF 50V M		R7718	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
C8903	QETN1HM-106Z	E CAPACITOR	10uF 50V M		R7719	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
C9000	NCB31HK-222X	C CAPACITOR	2200pF 50V K		R7720	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
C9001	QETN1HM-104Z	E CAPACITOR	0.1uF 50V M		R7721	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	
C9003	QEK1EM-106Z	E CAPACITOR	10uF 25V M		R7722	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	
					R7723	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	

△ Symbol No.	Part No.	Part Name	Description	Local
R7724	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	
R7725	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	
R7726	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R7728	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7731	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7732	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7735	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7737	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7738	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7739	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7740	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7742	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7743	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7744	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7745	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7746	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7747	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R7748	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7749	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7751	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	
R7752	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	
R7753	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7754	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7755	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7756	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7759	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	T99A,T99US, T99UN
R7760	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	T99UW
R7761	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	T99UX,T99UG
R7762	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7763	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R7766	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7767	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7768	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7769	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7770	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7771	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
R7772	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	
R7773	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	
R7774	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R7775	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7776	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7777	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7778	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7779	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7780	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7781	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7786	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7788	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7789	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7790	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7791	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7792	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7794	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7796	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7797	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7798	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7803	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7804	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7805	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7806	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7807	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7808	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7809	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7821	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7823	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7824	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7825	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7852	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R7859	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	T99EE,T99UW, T99UX,T99UG
R7860	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	T99A,T99EE, T99US,T99UX, T99UG,T99UN
R7861	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	T99A,T99EE, T99US,T99UW, T99UN
R7867	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7871	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	

△ Symbol No.	Part No.	Part Name	Description	Local
R7875	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R7876	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7878	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R7879	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7881	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R7886	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7892	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7897	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7899	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8000	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R8001	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R8002	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R8003	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R8004	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J	
R8005	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R8006	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8007	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R8020	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	
R8021	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R8030	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	
R8031	QRE141J-362Y	C RESISTOR	3.6kΩ 1/4W J	
R8032	QRE141J-123Y	C RESISTOR	12kΩ 1/4W J	
R8033	QRE141J-154Y	C RESISTOR	150kΩ 1/4W J	
R8034	QRE141J-473Y	C RESISTOR	47kΩ 1/4W J	
R8035	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R8036	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R8042	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R8043	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R8046	QRE141J-393Y	C RESISTOR	39kΩ 1/4W J	
R8060	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R8061	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8062	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8070	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R8071	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R8072	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8073	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8074	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R8075	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8080	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R8081	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R8082	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8083	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R8084	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R8085	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8090	QRE141J-153Y	C RESISTOR	15kΩ 1/4W J	
R8091	QRE141J-154Y	C RESISTOR	150kΩ 1/4W J	
R8092	NRSA63J-363X	MG RESISTOR	36kΩ 1/16W J	
R8093	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R8094	NRSA63J-133X	MG RESISTOR	13kΩ 1/16W J	
R8095	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	
R8096	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8098	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J	
R8099	QRE141J-105Y	C RESISTOR	1MΩ 1/4W J	
R8100	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R8101	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R8102	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R8103	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R8104	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J	
R8105	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R8106	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8107	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R8120	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	
R8121	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
R8130	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	
R8131	QRE141J-362Y	C RESISTOR	3.6kΩ 1/4W J	
R8132	QRE141J-123Y	C RESISTOR	12kΩ 1/4W J	
R8133	QRE141J-154Y	C RESISTOR	150kΩ 1/4W J	
R8134	QRE141J-473Y	C RESISTOR	47kΩ 1/4W J	
R8135	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R8136	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R8142	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R8143	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R8146	QRE141J-393Y	C RESISTOR	39kΩ 1/4W J	
R8160	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R8161	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8162	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8170	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R8171	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
R8172	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R8900	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R8173	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R9000	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8174	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R9001	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R8175	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R9002	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R8180	QRE141J-223Y	C RESISTOR	22kΩ 1/4W J		R9003	NRSA63J-274X	MG RESISTOR	270kΩ 1/16W J	
R8182	QRE141J-163Y	C RESISTOR	16kΩ 1/4W J		R9004	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R8183	QRE141J-223Y	C RESISTOR	22kΩ 1/4W J		R9005	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R8186	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J		R9006	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	
R8187	QRE141J-272Y	C RESISTOR	2.7kΩ 1/4W J		R9007	NRSA63J-474X	MG RESISTOR	470kΩ 1/16W J	
R8189	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J		R9010	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R8190	QRE141J-153Y	C RESISTOR	15kΩ 1/4W J		R9011	NRSA63J-824X	MG RESISTOR	820kΩ 1/16W J	
R8191	QRE141J-154Y	C RESISTOR	150kΩ 1/4W J		R9012	NRSA63J-163X	MG RESISTOR	16kΩ 1/16W J	
R8192	NRSA63J-363X	MG RESISTOR	36kΩ 1/16W J		R9013	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8193	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J		R9014	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8194	NRSA63J-133X	MG RESISTOR	13kΩ 1/16W J		R9015	QRE141J-221Y	C RESISTOR	220Ω 1/4W J	
R8195	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J		R9017	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R8196	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R9021	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R8198	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J		R9022	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R8199	QRE141J-105Y	C RESISTOR	1MΩ 1/4W J		R9030	NRSA63J-564X	MG RESISTOR	560kΩ 1/16W J	
R8202	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R9031	NRSA63J-564X	MG RESISTOR	560kΩ 1/16W J	
R8203	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J		R9032	NRSA63J-564X	MG RESISTOR	560kΩ 1/16W J	
R8204	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J		R9033	NRSA63J-564X	MG RESISTOR	560kΩ 1/16W J	
R8205	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J		R9034	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8206	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R9035	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	
R8211	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J		R9036	QRE141J-101Y	C RESISTOR	100Ω 1/4W J	
R8212	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R9101	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R8223	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R9102	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R8224	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R9103	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R8225	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R9104	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R8230	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J		VR901	QVQ0342-B24	V RESISTOR		
R8231	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J						
R8232	QRE141J-753Y	C RESISTOR	75kΩ 1/4W J		L9100	QQL231K-2R2Y	COIL	2.2uH K	
R8235	QRE141J-224Y	C RESISTOR	220kΩ 1/4W J		L9101	QQL231K-470Y	COIL	47uH K	
R8260	NRSA63J-474X	MG RESISTOR	470kΩ 1/16W J		L9102	QQL231K-470Y	COIL	47uH K	
R8261	NRSA63J-474X	MG RESISTOR	470kΩ 1/16W J						
R8262	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J		CN720	QGF1036C2-19	CONNECTOR	FFC/FPC (1-19)	
R8263	NRSA63J-475X	MG RESISTOR	4.7MΩ 1/16W J		CN730	QGF1205C2-25	CONNECTOR	FFC/FPC (1-25)	
R8264	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J		CN740	QGF1205F2-05	CONNECTOR	FFC/FPC (1-5)	
R8265	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J		CN750	QGF1205F2-11	CONNECTOR	FFC/FPC (1-11)	
R8266	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J		CN760	QGF1205C2-08	CONNECTOR	FFC/FPC (1-8)	
R8267	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J		CN787	QGF1210G1-05	CONNECTOR	FFC/FPC (1-5)	
R8268	NRSA63J-622X	MG RESISTOR	6.2kΩ 1/16W J		CN800	QGF1036C2-10	CONNECTOR	FFC/FPC (1-10)	
R8269	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J		CN810	QGF1036C2-08	CONNECTOR	FFC/FPC (1-8)	
R8293	QRE141J-393Y	C RESISTOR	39kΩ 1/4W J		CN820	QGF1205C2-08	CONNECTOR	FFC/FPC (1-8)	
R8335	QRE141J-224Y	C RESISTOR	220kΩ 1/4W J		CN830	QGF1205C2-19	CONNECTOR	FFC/FPC (1-19)	
R8401	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J		CN850	QGB2510J1-15	CONNECTOR	B-B (1-15)	
R8402	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J		CN860	QGB2510K2-06	CONNECTOR	B-B (1-6)	
R8403	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J		CN901	QGF1205F2-05	CONNECTOR	FFC/FPC (1-5)	
R8404	QRE141J-683Y	C RESISTOR	68kΩ 1/4W J		FW910	QUM153-21DGZ4-E	FLAT WIRE		
R8405	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J		J700	QNB0300-003	SPK TERMINAL		
R8407	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		J800	QNN0420-001	SURROUND JACK		
R8409	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J		J901	QNS0252-001	MIC JACK		
R8430	NRSA63J-912X	MG RESISTOR	9.1kΩ 1/16W J		J902	QNS0252-001	MIC JACK		
R8431	NRSA63J-912X	MG RESISTOR	9.1kΩ 1/16W J		J910	QNS0266-001	JACK		
R8432	NRSA63J-912X	MG RESISTOR	9.1kΩ 1/16W J		K8000	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R8433	NRSA63J-912X	MG RESISTOR	9.1kΩ 1/16W J		K8001	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R8434	NRSA63J-824X	MG RESISTOR	820kΩ 1/16W J		K9100	QQR0621-001Z	COIL		
R8435	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		RY712	QSK0109-001	RELAY		
R8507	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J		RY734	QSK0109-001	RELAY		
R8508	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J		RY750	QSK0109-001	RELAY		
R8509	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J		RY767	QSK0109-001	RELAY		
R8510	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J		X7700	QAX0711-002Z	CRYSTAL	8.000000MHz	
R8511	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J						
R8512	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J						
R8513	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J						
R8514	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J						
R8521	QRE141J-243Y	C RESISTOR	24kΩ 1/4W J						
R8523	QRZ9006-4R7X	FUSI RESISTOR	4.7Ω						
R8524	QRE141J-561Y	C RESISTOR	560Ω 1/4W J						
R8529	NRSA63J-113X	MG RESISTOR	11kΩ 1/16W J						
R8539	QRE141J-822Y	C RESISTOR	8.2kΩ 1/4W J						
R8551	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J						
R8574	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J						
R8575	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J						
R8578	QRE141J-681Y	C RESISTOR	680Ω 1/4W J						
R8579	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J						
R8810	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J						
R8811	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J						

Amplifier board (DX-T99)

Block No. [0][2]

△ Symbol No.	Part No.	Part Name	Description	Local
△ IC301	STK413-430	IC		
△ IC302	KIA7809API	IC		
△ IC303	KIA7805API	IC		
△ IC304	KIA7810API	IC		
△ IC305	KIA278R05PI	IC		
△ IC306	KIA278R09PI	IC		

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
△ IC307	KIA7808API	IC			C3202	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
△ IC308	KIA7805API	IC			C3203	QDGB1HK-681Y	C CAPACITOR	680pF 50V K	
△ IC401	STK412-430	POWER I.C			C3211	QCBB1HK-221Y	C CAPACITOR	220pF 50V K	
△ IC402	STK412-430	POWER I.C			C3212	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
IC500	PT6305	FL DRIVER			C3213	QDGB1HK-681Y	C CAPACITOR	680pF 50V K	
IC510	GP1UM281XKVF	IR DETECT UNIT			C3221	QCBB1HK-221Y	C CAPACITOR	220pF 50V K	
					C3222	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
Q3101	KTC3200/GL/-T	TRANSISTOR			C3223	QDGB1HK-681Y	C CAPACITOR	680pF 50V K	
Q3102	KTA1023/OY/-T	TRANSISTOR			C3402	QCSB1HJ-150Y	C CAPACITOR	15pF 50V J	
Q3103	KTA1268/GL/-T	TRANSISTOR			C3403	QETN1JM-476Z	E CAPACITOR	47uF 63V M	
Q3104	KTC1027/OY/-T	TRANSISTOR			C3404	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
Q3401	KTC3199/GL/-T	TRANSISTOR			C3405	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
Q3501	KTC3199/GL/-T	TRANSISTOR			C3502	QCSB1HJ-150Y	C CAPACITOR	15pF 50V J	
Q3601	KTC3199/GL/-T	TRANSISTOR			C3503	QETN1JM-476Z	E CAPACITOR	47uF 63V M	
Q3901	KTC3203/OY/-T	TRANSISTOR			C3504	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
Q3902	KRC102M-T	DIGI TRANSISTOR			C3505	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
Q4101	KTC3199/GL/-T	TRANSISTOR			C3602	QCSB1HJ-150Y	C CAPACITOR	15pF 50V J	
Q4201	KTC3199/GL/-T	TRANSISTOR			C3603	QETN1JM-476Z	E CAPACITOR	47uF 63V M	
Q4401	KTC3200/GL/-T	TRANSISTOR			C3604	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
Q4402	KTA1023/OY/-T	TRANSISTOR			C3605	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
Q4403	KTA1268/GL/-T	TRANSISTOR			C3701	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
Q4404	KTC1027/OY/-T	TRANSISTOR			C3702	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
Q4601	KTC3199/GL/-T	TRANSISTOR			C3811	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
Q4701	KTC3199/GL/-T	TRANSISTOR			C3812	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
Q4901	KTC3200/GL/-T	TRANSISTOR			C3821	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
Q4902	KTA1268/GL/-T	TRANSISTOR			C3822	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
Q4903	KTC3199/GL/-T	TRANSISTOR			C3831	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
Q4904	KTA1268/GL/-T	TRANSISTOR			C3832	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
Q5004	KRC102M-T	DIGI TRANSISTOR			C3841	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
Q5005	KRC102M-T	DIGI TRANSISTOR			C3842	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
Q5006	KRC102M-T	DIGI TRANSISTOR			C3851	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
Q5007	KRC102M-T	DIGI TRANSISTOR			C3852	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
Q5008	KTA1023/OY/-T	TRANSISTOR			C4102	QCSB1HJ-150Y	C CAPACITOR	15pF 50V J	
Q5009	KRC102M-T	DIGI TRANSISTOR			C4103	QETN1JM-476Z	E CAPACITOR	47uF 63V M	
Q5010	KRC110M-T	TRANSISTOR			C4104	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
Q5011	KTC3199/GL/-T	TRANSISTOR			C4105	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
					C4202	QCSB1HJ-150Y	C CAPACITOR	15pF 50V J	
D3101	1SS133-T2	SI DIODE			C4203	QETN1JM-476Z	E CAPACITOR	47uF 63V M	
D3301	MTZJ15B-T2	Z DIODE			C4204	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
D3302	MTZJ15B-T2	Z DIODE			C4205	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
D3303	MTZJ36A-T2	Z DIODE			C4301	QCBB1HK-221Y	C CAPACITOR	220pF 50V K	
D3304	MTZJ36A-T2	Z DIODE			C4302	QTE1V06-106Z	E CAPACITOR	10uF 35V	
D3401	1SS133-T2	SI DIODE			C4311	QCBB1HK-221Y	C CAPACITOR	220pF 50V K	
D3501	1SS133-T2	SI DIODE			C4312	QTE1V06-106Z	E CAPACITOR	10uF 35V	
D3601	1SS133-T2	SI DIODE			C4313	QCBB1HK-471Y	C CAPACITOR	470pF 50V K	
D3701	MTZJ6.2B-T2	Z DIODE			C4401	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
D3811	MTZJ11B-T2	Z DIODE			C4402	QFZ0212-104Z	M CAPACITOR	0.1uF	
D3821	MTZJ11C-T2	Z DIODE			C4403	QFZ0212-104Z	M CAPACITOR	0.1uF	
D3831	1SS133-T2	SI DIODE			C4404	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
D3832	MTZJ6.2B-T2	Z DIODE			C4405	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
D3841	MTZJ11B-T2	Z DIODE			C4602	QCSB1HJ-220Y	C CAPACITOR	22pF 50V J	
D3901	MTZJ13B-T2	Z DIODE			C4603	QETN1JM-476Z	E CAPACITOR	47uF 63V M	
D3902	1SS133-T2	SI DIODE			C4604	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
D3903	MTZJ4.3B-T2	Z DIODE			C4605	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
D4001	MTZJ15B-T2	Z DIODE			C4702	QCSB1HJ-220Y	C CAPACITOR	22pF 50V J	
D4002	MTZJ15B-T2	Z DIODE			C4703	QETN1JM-476Z	E CAPACITOR	47uF 63V M	
D4003	MTZJ36A-T2	Z DIODE			C4704	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
D4004	MTZJ36A-T2	Z DIODE			C4705	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
D4101	1SS133-T2	SI DIODE			C4801	QCBB1HK-221Y	C CAPACITOR	220pF 50V K	
D4201	1SS133-T2	SI DIODE			C4802	QTE1V06-106Z	E CAPACITOR	10uF 35V	
D4401	1SS133-T2	SI DIODE			C4803	QCBB1HK-101Y	C CAPACITOR	100pF 50V K	
D4501	MTZJ15B-T2	Z DIODE			C4811	QCBB1HK-221Y	C CAPACITOR	220pF 50V K	
D4502	MTZJ15B-T2	Z DIODE			C4812	QTE1V06-106Z	E CAPACITOR	10uF 35V	
D4503	MTZJ36A-T2	Z DIODE			C4813	QCBB1HK-101Y	C CAPACITOR	100pF 50V K	
D4504	MTZJ36A-T2	Z DIODE			C4901	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
D4601	1SS133-T2	SI DIODE			C4902	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
D4701	1SS133-T2	SI DIODE			C4903	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
D4901	1SS133-T2	SI DIODE			C5000	QETN1HM-226Z	E CAPACITOR	22uF 50V M	
D5004	SLI-343URC-W-T	LED			C5001	QETN1HM-226Z	E CAPACITOR	22uF 50V M	
D5005	SLI-343URC-W-T	LED			C5002	QDGB1HK-102Y	C CAPACITOR	1000pF 50V K	
D5006	SELU2E10C-P	LED			C5003	QKCC1EM-106Z	E CAPACITOR	10uF 25V M	
D5007	SLR-343VC-T	LED			C5004	QCBB1HK-104Y	C CAPACITOR	0.1uF 50V K	
					C5005	QCBB1HK-101Y	C CAPACITOR	100pF 50V K	
C3101	QETN1CM-107Z	E CAPACITOR	100uF 16V M		C5006	QKCC1AM-107Z	E CAPACITOR	100uF 10V M	
C3102	QFZ0212-104Z	M CAPACITOR	0.1uF		C5007	QCBB1HK-104Y	C CAPACITOR	0.1uF 50V K	
C3103	QFZ0212-104Z	M CAPACITOR	0.1uF		C5008	QCBB1HK-103Y	C CAPACITOR	0.01uF 50V K	
C3104	QETN1HM-105Z	E CAPACITOR	1uF 50V M						
C3201	QCBB1HK-221Y	C CAPACITOR	220pF 50V K		R3101	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
R3102	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J		R4204	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J	
R3103	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J		R4205	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R3104	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J		R4206	QRE141J-202Y	C RESISTOR	2kΩ 1/4W J	
△ R3105	QRJ146J-470X	UNF C RESISTOR	47Ω 1/4W J		R4207	QRE141J-473Y	C RESISTOR	47kΩ 1/4W J	
R3106	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J		R4208	QRE141J-562Y	C RESISTOR	5.6kΩ 1/4W J	
R3107	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J		R4209	QRJ146J-681X	UNF C RESISTOR	680Ω 1/4W J	
△ R3108	QRJ146J-470X	UNF C RESISTOR	47Ω 1/4W J		R4210	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
R3201	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J		R4211	QRE141J-202Y	C RESISTOR	2kΩ 1/4W J	
R3202	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J		R4302	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J	
R3203	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J		R4311	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R3204	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J		R4312	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J	
R3205	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J		R4401	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	
R3206	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J		R4402	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
R3301	QRE141J-682Y	C RESISTOR	6.8kΩ 1/4W J		R4403	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R3302	QRE141J-682Y	C RESISTOR	6.8kΩ 1/4W J		R4404	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R3303	QRE141J-682Y	C RESISTOR	6.8kΩ 1/4W J		△ R4405	QRJ146J-470X	UNF C RESISTOR	47Ω 1/4W J	
R3304	QRE141J-682Y	C RESISTOR	6.8kΩ 1/4W J		R4406	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
△ R3305	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J		R4407	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R3306	QRE141J-333Y	C RESISTOR	33kΩ 1/4W J		△ R4408	QRJ146J-470X	UNF C RESISTOR	47Ω 1/4W J	
△ R3401	QRZ0224-R22	EMIT RESISTOR	0.22Ω		R4501	QRE141J-682Y	C RESISTOR	6.8kΩ 1/4W J	
R3402	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J		R4502	QRE141J-682Y	C RESISTOR	6.8kΩ 1/4W J	
△ R3403	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J		R4503	QRE141J-682Y	C RESISTOR	6.8kΩ 1/4W J	
R3404	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J		R4504	QRE141J-682Y	C RESISTOR	6.8kΩ 1/4W J	
R3405	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J		△ R4505	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J	
R3406	QRE141J-202Y	C RESISTOR	2kΩ 1/4W J		R4506	QRE141J-333Y	C RESISTOR	33kΩ 1/4W J	
R3407	QRE141J-473Y	C RESISTOR	47kΩ 1/4W J		△ R4601	QRZ0224-R22	EMIT RESISTOR	0.22Ω	
R3408	QRE141J-562Y	C RESISTOR	5.6kΩ 1/4W J		R4602	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J	
△ R3409	QRJ146J-681X	UNF C RESISTOR	680Ω 1/4W J		△ R4603	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J	
R3410	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J		R4604	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J	
R3411	QRE141J-202Y	C RESISTOR	2kΩ 1/4W J		R4605	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
△ R3501	QRZ0224-R22	EMIT RESISTOR	0.22Ω		R4606	QRE141J-202Y	C RESISTOR	2kΩ 1/4W J	
R3502	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J		R4607	QRE141J-473Y	C RESISTOR	47kΩ 1/4W J	
△ R3503	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J		R4608	QRE141J-562Y	C RESISTOR	5.6kΩ 1/4W J	
△ R3504	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J		△ R4609	QRJ146J-681X	UNF C RESISTOR	680Ω 1/4W J	
R3505	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J		R4610	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
R3506	QRE141J-202Y	C RESISTOR	2kΩ 1/4W J		R4611	QRE141J-202Y	C RESISTOR	2kΩ 1/4W J	
R3507	QRE141J-473Y	C RESISTOR	47kΩ 1/4W J		△ R4701	QRZ0224-R22	EMIT RESISTOR	0.22Ω	
R3508	QRE141J-562Y	C RESISTOR	5.6kΩ 1/4W J		R4702	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J	
△ R3509	QRJ146J-681X	UNF C RESISTOR	680Ω 1/4W J		△ R4703	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J	
R3510	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J		△ R4704	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J	
R3511	QRE141J-202Y	C RESISTOR	2kΩ 1/4W J		R4705	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
△ R3601	QRZ0224-R22	EMIT RESISTOR	0.22Ω		R4706	QRE141J-202Y	C RESISTOR	2kΩ 1/4W J	
R3602	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J		R4707	QRE141J-473Y	C RESISTOR	47kΩ 1/4W J	
△ R3603	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J		R4708	QRE141J-562Y	C RESISTOR	5.6kΩ 1/4W J	
R3604	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J		△ R4709	QRJ146J-681X	UNF C RESISTOR	680Ω 1/4W J	
R3605	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J		R4710	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
R3606	QRE141J-202Y	C RESISTOR	2kΩ 1/4W J		R4711	QRE141J-202Y	C RESISTOR	2kΩ 1/4W J	
R3607	QRE141J-473Y	C RESISTOR	47kΩ 1/4W J		R4801	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R3608	QRE141J-562Y	C RESISTOR	5.6kΩ 1/4W J		R4802	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J	
△ R3609	QRJ146J-681X	UNF C RESISTOR	680Ω 1/4W J		R4811	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R3610	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J		R4812	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J	
R3611	QRE141J-202Y	C RESISTOR	2kΩ 1/4W J		R4901	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R3701	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J		R4902	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
R3831	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J		R4903	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R3902	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J		R4904	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
R3906	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J		R4905	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R3907	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J		R4906	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
R3908	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J		R5000	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R4001	QRE141J-682Y	C RESISTOR	6.8kΩ 1/4W J		R5001	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R4002	QRE141J-682Y	C RESISTOR	6.8kΩ 1/4W J		R5002	QRE141J-122Y	C RESISTOR	1.2kΩ 1/4W J	
R4003	QRE141J-682Y	C RESISTOR	6.8kΩ 1/4W J		R5003	QRE141J-182Y	C RESISTOR	1.8kΩ 1/4W J	
R4004	QRE141J-682Y	C RESISTOR	6.8kΩ 1/4W J		R5004	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	
△ R4005	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J		R5005	QRE141J-272Y	C RESISTOR	2.7kΩ 1/4W J	
R4006	QRE141J-333Y	C RESISTOR	33kΩ 1/4W J		R5006	QRE141J-392Y	C RESISTOR	3.9kΩ 1/4W J	
△ R4101	QRZ0224-R22	EMIT RESISTOR	0.22Ω		R5007	QRE141J-562Y	C RESISTOR	5.6kΩ 1/4W J	
R4102	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J		R5008	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
△ R4103	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J		R5009	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R4104	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J		R5010	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R4105	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J		R5011	QRE141J-122Y	C RESISTOR	1.2kΩ 1/4W J	
R4106	QRE141J-202Y	C RESISTOR	2kΩ 1/4W J		R5012	QRE141J-182Y	C RESISTOR	1.8kΩ 1/4W J	
R4107	QRE141J-473Y	C RESISTOR	47kΩ 1/4W J		R5013	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	
R4108	QRE141J-562Y	C RESISTOR	5.6kΩ 1/4W J		R5014	QRE141J-272Y	C RESISTOR	2.7kΩ 1/4W J	
R4109	QRJ146J-681X	UNF C RESISTOR	680Ω 1/4W J		R5015	QRE141J-392Y	C RESISTOR	3.9kΩ 1/4W J	
R4110	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J		R5016	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R4111	QRE141J-202Y	C RESISTOR	2kΩ 1/4W J		R5017	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
△ R4201	QRZ0224-R22	EMIT RESISTOR	0.22Ω		R5018	QRE141J-122Y	C RESISTOR	1.2kΩ 1/4W J	
R4202	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J		R5019	QRE141J-182Y	C RESISTOR	1.8kΩ 1/4W J	
△ R4203	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J		R5020	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	

△ Symbol No.	Part No.	Part Name	Description	Local
R5021	QRE141J-272Y	C RESISTOR	2.7kΩ 1/4W J	
R5022	QRE141J-392Y	C RESISTOR	3.9kΩ 1/4W J	
R5023	QRE141J-562Y	C RESISTOR	5.6kΩ 1/4W J	
R5024	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R5025	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R5026	QRE141J-122Y	C RESISTOR	1.2kΩ 1/4W J	
R5027	QRE141J-182Y	C RESISTOR	1.8kΩ 1/4W J	
R5028	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	
R5029	QRE141J-272Y	C RESISTOR	2.7kΩ 1/4W J	
R5030	QRE141J-392Y	C RESISTOR	3.9kΩ 1/4W J	
R5035	QRE141J-161Y	C RESISTOR	160Ω 1/4W J	
R5036	QRE141J-161Y	C RESISTOR	160Ω 1/4W J	
R5037	QRE141J-560Y	C RESISTOR	56Ω 1/4W J	
R5038	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R5039	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R5040	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R5041	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R5042	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R5043	QRE141J-271Y	C RESISTOR	270Ω 1/4W J	
R5044	QRE141J-821Y	C RESISTOR	820Ω 1/4W J	
R5045	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
R5046	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
R5050	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
L3401	QQLZ035-R39	COIL	0.39uH	
L3501	QQLZ035-R39	COIL	0.39uH	
L3601	QQLZ035-R39	COIL	0.39uH	
L4101	QQLZ035-R39	COIL	0.39uH	
L4201	QQLZ035-R39	COIL	0.39uH	
L4601	QQLZ035-R39	COIL	0.39uH	
L4701	QQLZ035-R39	COIL	0.39uH	
CN301	QGB2510K2-20	CONNECTOR	B-B (1-20)	
CN302	QGF1205C2-19	CONNECTOR	FFC/FPC (1-19)	
CN303	QGF1205F2-11	CONNECTOR	FFC/FPC (1-11)	
CN304	QGA2501F1-03	CONNECTOR	W-B (1-3)	
CN401	QGB2510K2-16	CONNECTOR	B-B (1-16)	
CN402	QGF1205C2-08	CONNECTOR	FFC/FPC (1-8)	
CN500	QGF1036F2-19	CONNECTOR	FFC/FPC (1-19)	
CN990	QGB2510J1-06	CONNECTOR	B-B (1-6)	
FL500	QLF0150-001	FL TUBE		
FW301	QUM155-16Z4Z4-E	FLAT WIRE		
FW401	QUM154-10Z4Z4-E	FLAT WIRE		
FW500	QUM153-18DGZ4-E	FLAT WIRE		
J990	QNB0263-001	SPK TERMINAL		
S5000	QSW0683-001Z	PUSH SW I.M		
S5001	QSW0683-001Z	PUSH SW I.M		
S5002	QSW0683-001Z	PUSH SW I.M		
S5003	QSW0683-001Z	PUSH SW I.M		
S5004	QSW0683-001Z	PUSH SW I.M		
S5005	QSW0683-001Z	PUSH SW I.M		
S5006	QSW0683-001Z	PUSH SW I.M		
S5007	QSW0683-001Z	PUSH SW I.M		
S5008	QSW0683-001Z	PUSH SW I.M		
S5009	QSW0683-001Z	PUSH SW I.M		
S5010	QSW0683-001Z	PUSH SW I.M		
S5011	QSW0683-001Z	PUSH SW I.M		
S5012	QSW0683-001Z	PUSH SW I.M		
S5013	QSW0683-001Z	PUSH SW I.M		
S5014	QSW0683-001Z	PUSH SW I.M		
S5015	QSW0683-001Z	PUSH SW I.M		
S5016	QSW0683-001Z	PUSH SW I.M		
S5017	QSW0683-001Z	PUSH SW I.M		
S5018	QSW0683-001Z	PUSH SW I.M		
S5019	QSW0683-001Z	PUSH SW I.M		
S5020	QSW0683-001Z	PUSH SW I.M		
S5021	QSW0683-001Z	PUSH SW I.M		
S5022	QSW0683-001Z	PUSH SW I.M		
S5023	QSW0683-001Z	PUSH SW I.M		
S5024	QSW0683-001Z	PUSH SW I.M		
S5025	QSW0683-001Z	PUSH SW I.M		
S5026	QSW0683-001Z	PUSH SW I.M		
S5027	QSW0683-001Z	PUSH SW I.M		
S5028	QSW0683-001Z	PUSH SW I.M		
S5029	QSW0683-001Z	PUSH SW I.M		
S5030	QSW0683-001Z	PUSH SW I.M		
S5031	QSW0683-001Z	PUSH SW I.M		
S5032	QSW0683-001Z	PUSH SW I.M		

△ Symbol No.	Part No.	Part Name	Description	Local
S5033	QSW0683-001Z	PUSH SW I.M		
S5034	QSW0683-001Z	PUSH SW I.M		
SP500	GV40205-004A	IC HOLDER		

Primary board (DX-T99)

Block No. [0][3]

△ Symbol No.	Part No.	Part Name	Description	Local
IC920	BH7868FS-X	IC		
IC930	GP1FAV30TK0F	OPT TRANSMITTER		
Q1000	KTC2026/Y/	TRANSISTOR		
Q1001	KTC3203/OY/-T	TRANSISTOR		
Q2007	KTA1046/Y/	TRANSISTOR		
Q2008	KTC3199/GL/-T	TRANSISTOR		
Q2009	KTC3199/GL/-T	TRANSISTOR		
Q9300	KRA110M-T	TRANSISTOR		
Q9301	KRC110M-T	TRANSISTOR		
Q9303	KTC3199/GL/-T	TRANSISTOR		
△ D1000	1N5402M-20	SI DIODE		
△ D1001	1N5402M-20	SI DIODE		
△ D1002	1N5402M-20	SI DIODE		
△ D1003	1N5402M-20	SI DIODE		
△ D1004	6A10E2	SI DIODE		
△ D1005	6A10E2	SI DIODE		
△ D1006	6A10E2	SI DIODE		
△ D1007	6A10E2	SI DIODE		
△ D1008	6A10E2	SI DIODE		
△ D1009	6A10E2	SI DIODE		
△ D1010	6A10E2	SI DIODE		
△ D1011	6A10E2	SI DIODE		
D1012	MTZJ6.2B-T2	Z DIODE		
D1013	MTZJ18B-T2	Z DIODE		
D1014	MTZJ18B-T2	Z DIODE		
D1015	1N4003S-T5	SI DIODE		
D1016	1N4003S-T5	SI DIODE		
D1017	1N4003S-T5	SI DIODE		
△ D2001	GBU803	BRIDGE DIODE		
D2008	2A02-M	DIODE		
D2009	MTZJ5.1C-T2	Z DIODE		
D2013	1SS133-T2	SI DIODE		
D9300	2A02-M	DIODE		
D9301	MTZJ3.3B-T2	Z DIODE		
D9302	MTZJ2.0A-T2	Z DIODE		
D9303	MTZJ3.9B-T2	Z DIODE		
D9310	MTZJ3.0B-T2	Z DIODE		
D9311	1SS133-T2	SI DIODE		
D9312	1SS133-T2	SI DIODE		
D9313	1SS133-T2	SI DIODE		
C1002	QETN1HM-226Z	E CAPACITOR	22uF 50V M	
C1003	QETN1HM-226Z	E CAPACITOR	22uF 50V M	
C1004	QCB1HK-103Y	C CAPACITOR	0.01uF 50V K	
C1005	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C1010	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
C1011	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
C1012	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
C1013	QFZ0228-104Z	M CAPACITOR	0.1uF	
C1014	QFZ0228-104Z	M CAPACITOR	0.1uF	
C1015	QFZ0228-104Z	M CAPACITOR	0.1uF	
C1016	QETN2AM-476Z	E CAPACITOR	47uF 100V M	
C1017	QETN1HM-107Z	E CAPACITOR	100uF 50V M	
C2000	QE20581-688	E CAPACITOR	6800uF	
C2004	QE20581-688	E CAPACITOR	6800uF	
C2006	QE20786-688	E CAPACITOR	6800uF	
C2008	QE20786-688	E CAPACITOR	6800uF	
C2009	QFZ0228-104Z	M CAPACITOR	0.1uF	
C2010	QCB1HK-103Y	C CAPACITOR	0.01uF 50V K	
C2011	QCB1HK-221Y	C CAPACITOR	220pF 50V K	
C2012	QETM1CM-478	E CAPACITOR	4700uF 16V M	
C2013	QETM1EM-688	E CAPACITOR	6800uF 25V M	
C9200	QETN1AM-477Z	E CAPACITOR	470uF 10V M	

△ Symbol No.	Part No.	Part Name	Description	Local
C9204	QCBB1HK-103Y	C CAPACITOR	0.01uF 50V K	
C9206	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
C9209	QETN1HM-226Z	E CAPACITOR	22uF 50V M	
C9211	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
C9213	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
C9215	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
C9216	QCBB1HK-104Y	C CAPACITOR	0.1uF 50V K	
C9218	QETN0JM-477Z	E CAPACITOR	470uF 6.3V M	
C9221	QETN0JM-477Z	E CAPACITOR	470uF 6.3V M	
C9224	QETN0JM-477Z	E CAPACITOR	470uF 6.3V M	
C9227	QETN0JM-477Z	E CAPACITOR	470uF 6.3V M	
C9230	QETN0JM-477Z	E CAPACITOR	470uF 6.3V M	
C9232	QCBB1HK-103Y	C CAPACITOR	0.01uF 50V K	
C9300	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C9303	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
△ R1000	QRK126J-470X	UNF C RESISTOR	47Ω 1/2W J	
R1001	QRE141J-753Y	C RESISTOR	75kΩ 1/4W J	
R1002	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
R1003	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
R1005	QRE141J-753Y	C RESISTOR	75kΩ 1/4W J	
R2000	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
R2001	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
R2002	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
R2003	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
R2004	QRE141J-681Y	C RESISTOR	680Ω 1/4W J	
R2005	QRE141J-272Y	C RESISTOR	2.7kΩ 1/4W J	
R2006	QRE141J-681Y	C RESISTOR	680Ω 1/4W J	
R2007	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	
R2008	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R2009	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R2010	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R2011	QRL01DJ-471X	OMF RESISTOR	470Ω 1W J	
R2012	QRL01DJ-471X	OMF RESISTOR	470Ω 1W J	
R2013	QRE141J-273Y	C RESISTOR	27kΩ 1/4W J	
R9201	QRE141J-431Y	C RESISTOR	430Ω 1/4W J	
R9202	QRE141J-391Y	C RESISTOR	390Ω 1/4W J	
R9203	QRE141J-391Y	C RESISTOR	390Ω 1/4W J	
R9204	QRE141J-131Y	C RESISTOR	130Ω 1/4W J	
R9205	QRE141J-391Y	C RESISTOR	390Ω 1/4W J	
R9206	QRE141J-131Y	C RESISTOR	130Ω 1/4W J	
R9207	QRE141J-391Y	C RESISTOR	390Ω 1/4W J	
R9208	QRE141J-431Y	C RESISTOR	430Ω 1/4W J	
R9209	QRE141J-391Y	C RESISTOR	390Ω 1/4W J	
R9210	QRE141J-431Y	C RESISTOR	430Ω 1/4W J	
R9218	QRE141J-750Y	C RESISTOR	75Ω 1/4W J	
R9221	QRE141J-750Y	C RESISTOR	75Ω 1/4W J	
R9224	QRE141J-750Y	C RESISTOR	75Ω 1/4W J	
R9227	QRE141J-750Y	C RESISTOR	75Ω 1/4W J	
R9230	QRE141J-750Y	C RESISTOR	75Ω 1/4W J	
R9232	QRE141J-750Y	C RESISTOR	75Ω 1/4W J	
R9300	QRT01DJ-2R2X	MF RESISTOR	2.2Ω 1W J	
R9301	QRE141J-681Y	C RESISTOR	680Ω 1/4W J	
R9302	QRZ9006-4R7X	FUSI RESISTOR	4.7Ω	
R9303	QRE141J-271Y	C RESISTOR	270Ω 1/4W J	
R9310	QRE141J-470Y	C RESISTOR	47Ω 1/4W J	
CN100	QGA7901C1-02	CONNECTOR	W-B (1-2)	
CN101	QGA7901C1-04	CONNECTOR	W-B (1-4)	
CN102	QGA7901C1-03	CONNECTOR	W-B (1-3)	
CN103	QGA3901F1-08	CONNECTOR	W-B (1-8)	
CN104	QGB2510J1-13	CONNECTOR	B-B (1-13)	
CN105	QGD2503F1-03	CONNECTOR	(1-3)	
CN106	QGA3901F2-03	CONNECTOR	W-B (1-3)	
CN200	QGB2510J1-16	CONNECTOR	B-B (1-16)	
CN201	QGB2510J1-20	CONNECTOR	B-B (1-20)	
CN202	QGD2504C1-03Z	CONNECTOR	(1-3)	
CN203	QGB2510K2-15	CONNECTOR	B-B (1-15)	
CN204	QGB2510K2-13	CONNECTOR	B-B (1-13)	
CN920	QGF1205C2-08	CONNECTOR	FFC/FPC (1-8)	
CN930	QGF1036C2-28	CONNECTOR	FFC/FPC (1-28)	
CN931	QGF1205C2-11	CONNECTOR	FFC/FPC (1-11)	
H2001	GV40577-001A	HEAT SINK		
HS202	GV40620-003A	HEAT SINK		
IH920	GV40397-004A	IC HOLDER		
J920	QNN0572-001	PIN JACK		
J921	QNN0557-002	PIN JACK		
PP201	QZW0112-001	WIRE CLAMP		

△ Symbol No.	Part No.	Part Name	Description	Local
PP202	QZW0112-001	WIRE CLAMP		
△ S1000	QSW0812-001	VOLTAGE SWITCH		
Z1001	QNG0003-001Z	FUSE CLIP		
Z1002	QNG0003-001Z	FUSE CLIP		
Z1003	QNG0003-001Z	FUSE CLIP		
Z1004	QNG0003-001Z	FUSE CLIP		
Z1005	QNG0003-001Z	FUSE CLIP		
Z1006	QNG0003-001Z	FUSE CLIP		
Z1007	QNG0003-001Z	FUSE CLIP		
Z1008	QNG0003-001Z	FUSE CLIP		
Z1009	QNG0003-001Z	FUSE CLIP		
Z1010	QNG0003-001Z	FUSE CLIP		
Z1011	QNG0003-001Z	FUSE CLIP		
Z1012	QNG0003-001Z	FUSE CLIP		
Z1013	QNG0003-001Z	FUSE CLIP		
Z1014	QNG0003-001Z	FUSE CLIP		
Z1015	QNG0003-001Z	FUSE CLIP		
Z1016	QNG0003-001Z	FUSE CLIP		
Z1017	QNG0003-001Z	FUSE CLIP		
Z1018	QNG0003-001Z	FUSE CLIP		
Z1019	QNG0003-001Z	FUSE CLIP		
Z1020	QNG0003-001Z	FUSE CLIP		

Main board (DX-T77)

Block No. [0][4]

△ Symbol No.	Part No.	Part Name	Description	Local
IC760	SN74AHCT08NS-X IC			
IC770	MN101C49GFA	MASK MICON		
IC771	BR24L02F-W-X	IC(DIGITAL)		
IC800	RC4558D-X	IC		
IC801	RC4558D-X	IC		
IC810	CD4066BM-X	IC		
IC820	LC75342M-X	IC		
IC830	RC4558D-X	IC		
IC850	M65851FP	IC		
IC860	JCV8011-X	IC		
IC870	LC75342M-X	IC		
IC880	LC75342M-X	IC		
IC881	RC4558D-X	IC		
IC888	RC4558D-X	IC		
IC901	RC4580ID-X	IC		
Q7000	KTC3199/GL/-T	TRANSISTOR		
Q7010	KTC3199/GL/-T	TRANSISTOR		
Q7080	KRC107S-X	DIGI TRANSISTOR		
Q7081	KRC111S-X	TRANSISTOR		
Q7788	KRA102S-X	DIGI TRANSISTOR		
Q7794	KRA102S-X	DIGI TRANSISTOR		
Q7798	KRA102S-X	DIGI TRANSISTOR		
Q8000	KTC2875-X	CHIP TR.		
Q8030	KTC3875/YG/-X	TRANSISTOR		
Q8031	KTC3875/YG/-X	TRANSISTOR		
Q8032	KTC3875/YG/-X	TRANSISTOR		
Q8040	KTC2875-X	CHIP TR.		
Q8070	KTC2875-X	CHIP TR.		
Q8071	KTC2875-X	CHIP TR.		
Q8080	KTC2875-X	CHIP TR.		
Q8081	KTC2875-X	CHIP TR.		
Q8100	KTC2875-X	CHIP TR.		
Q8130	KTC3875/YG/-X	TRANSISTOR		
Q8131	KTC3875/YG/-X	TRANSISTOR		
Q8132	KTC3875/YG/-X	TRANSISTOR		
Q8140	KTC2875-X	CHIP TR.		
Q8170	KTC2875-X	CHIP TR.		
Q8171	KTC2875-X	CHIP TR.		
Q8180	KTC2875-X	CHIP TR.		
Q8211	KRC104S-X	TRANSISTOR		
Q8212	KRC104S-X	TRANSISTOR		
Q8260	KTC3199/GL/-T	TRANSISTOR		
Q8401	KRC109S-X	TRANSISTOR		
Q8524	KTC3203/OY/-T	TRANSISTOR		
Q8900	KRA104S-X	DIGI TRANSISTOR		

△ Symbol No.	Part No.	Part Name	Description	Local
Q9001	KTC3875/YG/-X	TRANSISTOR		
Q9002	KTC3875/YG/-X	TRANSISTOR		
Q9100	KRA111S-X	D. TRANSISTOR		
Q9101	KTC2875-X	CHIP TR.		
Q9102	KTC2875-X	CHIP TR.		
Q9103	KTC2875-X	CHIP TR.		
Q9104	KTC2875-X	CHIP TR.		
D7000	1SS133-T2	SI DIODE		
D7001	1SS133-T2	SI DIODE		
D7010	1SS133-T2	SI DIODE		
D7012	1SS133-T2	SI DIODE		
D7050	MTZJ5.1B-T2	Z DIODE		
D7080	1SS133-T2	SI DIODE		
D7081	MTZJ4.7B-T2	Z DIODE		
D7082	1SS133-T2	SI DIODE		
D7151	1SS133-T2	SI DIODE		
D7152	1SS133-T2	SI DIODE		
D7153	1SS133-T2	SI DIODE		
D7154	1SS133-T2	SI DIODE		
D7155	1SS133-T2	SI DIODE		
D7156	1SS133-T2	SI DIODE		
D7390	1SS133-T2	SI DIODE		
D7711	1SS133-T2	SI DIODE		
D7713	1N4003S-T5	SI DIODE		
D8230	1SS133-T2	SI DIODE		
D8401	1SS133-T2	SI DIODE		
D8524	MTZJ5.6B-T2	Z DIODE		
D9001	1SS133-T2	SI DIODE		
D9002	1SS133-T2	SI DIODE		
C7050	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	T77EE,T77US, T77UX,T77UY, T77UG,T77UN T77UW
C7050	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C7080	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C7082	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
C7083	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C7085	QETN0JM-108Z	E CAPACITOR	1000uF 6.3V M	
C7101	QCB1HK-101Y	C CAPACITOR	100pF 50V K	
C7710	QCB1HK-103Y	C CAPACITOR	0.01uF 50V K	
C7711	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C7712	NCS31HJ-200X	C CAPACITOR	20pF 50V J	
C7713	NCS31HJ-180X	C CAPACITOR	18pF 50V J	
C7788	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C7794	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C7798	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C8000	QTE1V06-106Z	E CAPACITOR	10uF 35V	
C8001	QTE1V06-106Z	E CAPACITOR	10uF 35V	
C8002	QTE1V06-106Z	E CAPACITOR	10uF 35V	
C8003	NCS31HJ-151X	C CAPACITOR	150pF 50V J	
C8020	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
C8021	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
C8022	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
C8023	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
C8025	QTE1H28-106Z	E CAPACITOR	10uF 50V	
C8026	QFG32AJ-272Z	PP CAPACITOR	2700pF 100V J	
C8027	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
C8028	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
C8030	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
C8031	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
C8032	QTE1C06-226Z	E CAPACITOR	22uF 16V	
C8060	QTE1H28-106Z	E CAPACITOR	10uF 50V	
C8061	QTE1H28-106Z	E CAPACITOR	10uF 50V	
C8062	QTE1V06-106Z	E CAPACITOR	10uF 35V	
C8070	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C8072	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C8074	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
C8076	QETN1HM-104Z	E CAPACITOR	0.1uF 50V M	
C8080	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C8082	QETN1HM-104Z	E CAPACITOR	0.1uF 50V M	
C8083	QETN1HM-104Z	E CAPACITOR	0.1uF 50V M	
C8084	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
C8085	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
C8086	QETN1HM-104Z	E CAPACITOR	0.1uF 50V M	
C8100	QTE1V06-106Z	E CAPACITOR	10uF 35V	
C8101	QTE1V06-106Z	E CAPACITOR	10uF 35V	
C8102	QTE1V06-106Z	E CAPACITOR	10uF 35V	

△ Symbol No.	Part No.	Part Name	Description	Local
C8103	NCS31HJ-151X	C CAPACITOR	150pF 50V J	
C8120	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
C8121	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
C8122	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
C8123	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
C8125	QTE1H28-106Z	E CAPACITOR	10uF 50V	
C8126	QFG32AJ-272Z	PP CAPACITOR	2700pF 100V J	
C8127	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
C8128	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
C8130	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
C8131	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
C8132	QTE1C06-226Z	E CAPACITOR	22uF 16V	
C8160	QTE1H28-106Z	E CAPACITOR	10uF 50V	
C8161	QTE1H28-106Z	E CAPACITOR	10uF 50V	
C8162	QTE1V06-106Z	E CAPACITOR	10uF 35V	
C8170	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C8172	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C8173	QETN1HM-104Z	E CAPACITOR	0.1uF 50V M	
C8174	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
C8176	QETN1HM-104Z	E CAPACITOR	0.1uF 50V M	
C8180	QFLC1HJ-123Z	M CAPACITOR	0.012uF 50V J	
C8181	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
C8182	QFLC1HJ-153Z	M CAPACITOR	0.015uF 50V J	
C8184	QETN1JM-476Z	E CAPACITOR	47uF 63V M	
C8185	QETN1JM-476Z	E CAPACITOR	47uF 63V M	
C8202	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C8203	QFLC1HJ-223Z	M CAPACITOR	0.022uF 50V J	
C8204	QFLC1HJ-223Z	M CAPACITOR	0.022uF 50V J	
C8221	QCB1HK-103Y	C CAPACITOR	0.01uF 50V K	
C8222	QTE1C06-107Z	E CAPACITOR	100uF 16V	
C8230	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
C8232	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
C8261	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
C8262	QFLC1HJ-223Z	M CAPACITOR	0.022uF 50V J	
C8263	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M	
C8264	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C8265	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C8266	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
C8267	QETN1EM-336Z	E CAPACITOR	33uF 25V M	
C8268	QETN1HM-224Z	E CAPACITOR	0.22uF 50V M	
C8269	QTE1H28-105Z	E CAPACITOR	1uF 50V	
C8272	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C8282	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C8360	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
C8361	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
C8362	QETN1HM-474Z	E CAPACITOR	0.47uF 50V M	
C8363	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
C8401	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
C8403	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C8430	NCB31HK-222X	C CAPACITOR	2200pF 50V K	
C8431	NCB31HK-222X	C CAPACITOR	2200pF 50V K	
C8432	NCB31HK-222X	C CAPACITOR	2200pF 50V K	
C8433	NCB31HK-222X	C CAPACITOR	2200pF 50V K	
C8434	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
C8437	QETN1HM-104Z	E CAPACITOR	0.1uF 50V M	
C8502	QFLC1HJ-152Z	M CAPACITOR	1500pF 50V J	
C8504	QFLC1HJ-152Z	M CAPACITOR	1500pF 50V J	
C8506	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M	
C8508	QFLC1HJ-102Z	M CAPACITOR	1000pF 50V J	
C8509	QFLC1HJ-332Z	M CAPACITOR	3300pF 50V J	
C8512	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M	
C8513	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M	
C8514	QFLC1HJ-102Z	M CAPACITOR	1000pF 50V J	
C8515	QFLC1HJ-472Z	M CAPACITOR	4700pF 50V J	
C8516	QFLC1HJ-683Z	M CAPACITOR	0.068uF 50V J	
C8520	QFLC1HJ-683Z	M CAPACITOR	0.068uF 50V J	
C8522	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
C8524	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C8531	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C8539	QETN1HM-104Z	E CAPACITOR	0.1uF 50V M	
C8540	QFLC1HJ-102Z	M CAPACITOR	1000pF 50V J	
C8541	QFLC1HJ-472Z	M CAPACITOR	4700pF 50V J	
C8542	QFLC1HJ-683Z	M CAPACITOR	0.068uF 50V J	
C8546	QFLC1HJ-683Z	M CAPACITOR	0.068uF 50V J	
C8548	QFLC1HJ-102Z	M CAPACITOR	1000pF 50V J	
C8550	QFLC1HJ-472Z	M CAPACITOR	4700pF 50V J	
C8551	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
C8553	QETN1HM-106Z	E CAPACITOR	10uF 50V M	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
C8555	QETN1CM-107Z	E CAPACITOR	100uF 16V M		R7703	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C8556	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R7704	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C8572	QFLC1HJ-223Z	M CAPACITOR	0.022uF 50V J		R7705	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C8574	QTE1V06-106Z	E CAPACITOR	10uF 35V		R7706	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C8575	QTE1V06-106Z	E CAPACITOR	10uF 35V		R7707	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
C8576	QFVF1HJ-154Z	MF CAPACITOR	0.15uF 50V J		R7708	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
C8578	QETN1HM-105Z	E CAPACITOR	1uF 50V M		R7709	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
C8579	QETN1HM-105Z	E CAPACITOR	1uF 50V M		R7715	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C8581	NCB31AK-154X	C CAPACITOR	0.15uF 10V K		R7717	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C8583	NCB31AK-154X	C CAPACITOR	0.15uF 10V K		R7718	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
C8590	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R7719	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
C8591	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R7720	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
C8593	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R7721	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	
C8597	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R7722	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	
C8598	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R7723	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	
C8810	QETN1CM-107Z	E CAPACITOR	100uF 16V M		R7724	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	
C8900	QETN1HM-105Z	E CAPACITOR	1uF 50V M		R7725	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	
C8902	QETN1HM-106Z	E CAPACITOR	10uF 50V M		R7726	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
C8903	QETN1HM-106Z	E CAPACITOR	10uF 50V M		R7728	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
C9000	NCB31HK-222X	C CAPACITOR	2200pF 50V K		R7731	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
C9001	QETN1HM-104Z	E CAPACITOR	0.1uF 50V M		R7732	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C9003	QEK1EM-106Z	E CAPACITOR	10uF 25V M		R7735	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C9004	QEK1CM-474Z	E CAPACITOR	0.47uF 50V M		R7737	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C9005	QEK1CM-104Z	E CAPACITOR	0.1uF 50V M		R7738	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C9006	QETN1HM-105Z	E CAPACITOR	1uF 50V M		R7739	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C9007	QEK1CM-104Z	E CAPACITOR	0.1uF 50V M		R7740	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C9008	QETN1HM-105Z	E CAPACITOR	1uF 50V M		R7742	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C9009	QETN1EM-476Z	E CAPACITOR	47uF 25V M		R7743	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C9010	QEK1CM-107Z	E CAPACITOR	100uF 16V M		R7744	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C9021	NCB31HK-102X	C CAPACITOR	1000pF 50V K		R7745	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C9022	NCB31HK-102X	C CAPACITOR	1000pF 50V K		R7746	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C9030	NDC31HJ-680X	C CAPACITOR	68pF 50V J		R7747	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C9031	NDC31HJ-680X	C CAPACITOR	68pF 50V J		R7748	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C9032	NDC31HJ-680X	C CAPACITOR	68pF 50V J		R7749	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C9033	NDC31HJ-680X	C CAPACITOR	68pF 50V J		R7751	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	
C9034	QEK1CM-474Z	E CAPACITOR	0.47uF 50V M		R7752	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	
C9101	QDGB1HK-102Y	C CAPACITOR	1000pF 50V K		R7753	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C9102	QDGB1HK-102Y	C CAPACITOR	1000pF 50V K		R7754	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
C9103	QDXB1CM-392Y	C CAPACITOR	3900pF 16V M		R7755	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
C9104	QDXB1CM-392Y	C CAPACITOR	3900pF 16V M		R7756	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
C9105	QDGB1HK-102Y	C CAPACITOR	1000pF 50V K		R7759	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	T77US,T77UN
					R7760	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	T77UW,T77UY
R7000	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J		R7761	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	T77UX,T77UG
R7001	QRL01DJ-151X	OMF RESISTOR	150Ω 1W J		R7762	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7002	QRL01DJ-151X	OMF RESISTOR	150Ω 1W J		R7763	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R7003	QRL01DJ-151X	OMF RESISTOR	150Ω 1W J		R7766	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7004	QRL01DJ-151X	OMF RESISTOR	150Ω 1W J		R7767	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7005	QRL01DJ-151X	OMF RESISTOR	150Ω 1W J		R7768	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7006	QRL01DJ-151X	OMF RESISTOR	150Ω 1W J		R7769	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7010	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J		R7770	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7011	QRL01DJ-151X	OMF RESISTOR	150Ω 1W J		R7771	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
R7012	QRL01DJ-151X	OMF RESISTOR	150Ω 1W J		R7772	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	
R7013	QRL01DJ-151X	OMF RESISTOR	150Ω 1W J		R7773	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	
R7014	QRL01DJ-151X	OMF RESISTOR	150Ω 1W J		R7774	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R7015	QRL01DJ-151X	OMF RESISTOR	150Ω 1W J		R7775	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7016	QRL01DJ-151X	OMF RESISTOR	150Ω 1W J		R7776	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7050	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J		R7777	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7080	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J		R7778	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7081	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R7779	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7082	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R7780	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7083	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J		R7781	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7084	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J		R7786	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7085	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J		R7788	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7151	QRE141J-123Y	C RESISTOR	12kΩ 1/4W J		R7789	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7152	QRE141J-123Y	C RESISTOR	12kΩ 1/4W J		R7790	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7153	QRE141J-123Y	C RESISTOR	12kΩ 1/4W J		R7791	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7154	QRE141J-123Y	C RESISTOR	12kΩ 1/4W J		R7792	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7155	QRE141J-123Y	C RESISTOR	12kΩ 1/4W J		R7794	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7156	QRE141J-123Y	C RESISTOR	12kΩ 1/4W J		R7796	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7200	QRE141J-273Y	C RESISTOR	27kΩ 1/4W J		R7797	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7251	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J		R7798	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7252	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J		R7803	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7253	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J		R7804	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7254	QRE141J-272Y	C RESISTOR	2.7kΩ 1/4W J		R7805	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7255	QRE141J-272Y	C RESISTOR	2.7kΩ 1/4W J		R7806	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7256	QRE141J-272Y	C RESISTOR	2.7kΩ 1/4W J		R7807	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7600	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J		R7808	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7702	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J		R7809	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	

△ Symbol No.	Part No.	Part Name	Description	Local
R7821	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7823	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7824	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7825	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7852	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R7859	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	T77EE,T77UW, T77UX,T77UY, T77UG
R7860	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	T77EE,T77US, T77UX,T77UG,T 77UN
R7861	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	T77EE,T77US, T77UW,T77UY, T77UN
R7867	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7871	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R7875	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R7876	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7878	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R7879	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7881	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R7886	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7892	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7897	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7899	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8000	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R8001	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R8002	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R8003	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R8004	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J	
R8005	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R8006	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8007	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R8020	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	
R8021	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R8030	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	
R8031	QRE141J-332Y	C RESISTOR	3.3kΩ 1/4W J	
R8032	QRE141J-682Y	C RESISTOR	6.8kΩ 1/4W J	
R8033	QRE141J-124Y	C RESISTOR	120kΩ 1/4W J	
R8034	QRE141J-473Y	C RESISTOR	47kΩ 1/4W J	
R8035	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R8036	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R8042	QRE141J-392Y	C RESISTOR	3.9kΩ 1/4W J	
R8043	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R8046	QRE141J-393Y	C RESISTOR	39kΩ 1/4W J	
R8060	QRE141J-912Y	C RESISTOR	9.1kΩ 1/4W J	
R8061	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8062	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8070	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R8071	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R8072	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8073	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8074	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R8075	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8080	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R8081	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R8082	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8083	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R8084	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R8085	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8090	QRE141J-153Y	C RESISTOR	15kΩ 1/4W J	
R8091	QRE141J-154Y	C RESISTOR	150kΩ 1/4W J	
R8092	NRSA63J-363X	MG RESISTOR	36kΩ 1/16W J	
R8093	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R8094	NRSA63J-133X	MG RESISTOR	13kΩ 1/16W J	
R8095	NRSA63J-242X	MG RESISTOR	2.4kΩ 1/16W J	
R8096	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8098	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R8099	QRE141J-105Y	C RESISTOR	1MΩ 1/4W J	
R8100	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R8101	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R8102	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R8103	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R8104	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J	
R8105	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R8106	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8107	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R8120	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	
R8121	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	

△ Symbol No.	Part No.	Part Name	Description	Local
R8130	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	
R8131	QRE141J-332Y	C RESISTOR	3.3kΩ 1/4W J	
R8132	QRE141J-682Y	C RESISTOR	6.8kΩ 1/4W J	
R8133	QRE141J-124Y	C RESISTOR	120kΩ 1/4W J	
R8134	QRE141J-473Y	C RESISTOR	47kΩ 1/4W J	
R8135	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R8136	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R8142	QRE141J-392Y	C RESISTOR	3.9kΩ 1/4W J	
R8143	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R8146	QRE141J-393Y	C RESISTOR	39kΩ 1/4W J	
R8160	QRE141J-912Y	C RESISTOR	9.1kΩ 1/4W J	
R8161	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8162	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8170	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R8171	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R8172	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8173	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8174	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R8175	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8180	QRE141J-223Y	C RESISTOR	22kΩ 1/4W J	
R8182	QRE141J-163Y	C RESISTOR	16kΩ 1/4W J	
R8183	QRE141J-223Y	C RESISTOR	22kΩ 1/4W J	
R8186	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R8187	QRE141J-272Y	C RESISTOR	2.7kΩ 1/4W J	
R8189	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	
R8190	QRE141J-153Y	C RESISTOR	15kΩ 1/4W J	
R8191	QRE141J-154Y	C RESISTOR	150kΩ 1/4W J	
R8192	NRSA63J-363X	MG RESISTOR	36kΩ 1/16W J	
R8193	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R8194	NRSA63J-133X	MG RESISTOR	13kΩ 1/16W J	
R8195	NRSA63J-242X	MG RESISTOR	2.4kΩ 1/16W J	
R8196	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8198	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R8199	QRE141J-105Y	C RESISTOR	1MΩ 1/4W J	
R8202	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8203	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R8204	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R8205	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J	
R8206	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8211	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R8212	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8223	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R8224	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R8225	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R8230	QRE141J-123Y	C RESISTOR	12kΩ 1/4W J	
R8231	QRE141J-512Y	C RESISTOR	5.1kΩ 1/4W J	
R8232	QRE141J-823Y	C RESISTOR	82kΩ 1/4W J	
R8235	QRE141J-224Y	C RESISTOR	220kΩ 1/4W J	
R8260	NRSA63J-474X	MG RESISTOR	470kΩ 1/16W J	
R8261	NRSA63J-474X	MG RESISTOR	470kΩ 1/16W J	
R8262	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R8263	NRSA63J-475X	MG RESISTOR	4.7MΩ 1/16W J	
R8264	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	
R8265	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R8266	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R8267	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R8268	NRSA63J-622X	MG RESISTOR	6.2kΩ 1/16W J	
R8269	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	
R8293	QRE141J-393Y	C RESISTOR	39kΩ 1/4W J	
R8335	QRE141J-224Y	C RESISTOR	220kΩ 1/4W J	
R8401	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	
R8402	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	
R8403	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	
R8404	QRE141J-683Y	C RESISTOR	68kΩ 1/4W J	
R8405	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
R8407	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R8409	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R8430	NRSA63J-912X	MG RESISTOR	9.1kΩ 1/16W J	
R8431	NRSA63J-912X	MG RESISTOR	9.1kΩ 1/16W J	
R8432	NRSA63J-912X	MG RESISTOR	9.1kΩ 1/16W J	
R8433	NRSA63J-912X	MG RESISTOR	9.1kΩ 1/16W J	
R8434	NRSA63J-824X	MG RESISTOR	820kΩ 1/16W J	
R8435	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R8507	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R8508	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J	
R8509	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J	
R8510	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J	
R8511	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J	

△ Symbol No.	Part No.	Part Name	Description	Local
R8512	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J	
R8513	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J	
R8514	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J	
R8521	QRE141J-243Y	C RESISTOR	24kΩ 1/4W J	
R8523	QRZ9006-4R7X	FUSI RESISTOR	4.7Ω	
R8524	QRE141J-561Y	C RESISTOR	560Ω 1/4W J	
R8529	NRSA63J-113X	MG RESISTOR	11kΩ 1/16W J	
R8539	QRE141J-822Y	C RESISTOR	8.2kΩ 1/4W J	
R8551	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R8574	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R8575	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R8578	QRE141J-681Y	C RESISTOR	680Ω 1/4W J	
R8579	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R8810	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	
R8811	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	
R8900	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R9000	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R9001	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R9002	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R9003	NRSA63J-274X	MG RESISTOR	270kΩ 1/16W J	
R9004	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R9005	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R9006	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	
R9007	NRSA63J-474X	MG RESISTOR	470kΩ 1/16W J	
R9010	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R9011	NRSA63J-824X	MG RESISTOR	820kΩ 1/16W J	
R9012	NRSA63J-163X	MG RESISTOR	16kΩ 1/16W J	
R9013	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R9014	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R9015	QRE141J-221Y	C RESISTOR	220Ω 1/4W J	
R9017	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R9021	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R9022	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R9030	NRSA63J-564X	MG RESISTOR	560kΩ 1/16W J	
R9031	NRSA63J-564X	MG RESISTOR	560kΩ 1/16W J	
R9032	NRSA63J-564X	MG RESISTOR	560kΩ 1/16W J	
R9033	NRSA63J-564X	MG RESISTOR	560kΩ 1/16W J	
R9034	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R9035	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	
R9036	QRE141J-101Y	C RESISTOR	100Ω 1/4W J	
R9101	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R9102	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R9103	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R9104	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
VR901	QVQ0342-B24	V RESISTOR		
L9100	QQL231K-2R2Y	COIL	2.2uH K	
L9101	QQL231K-470Y	COIL	47uH K	
L9102	QQL231K-470Y	COIL	47uH K	
CN720	QGF1036C2-19	CONNECTOR	FFC/FPC (1-19)	
CN730	QGF1205C2-25	CONNECTOR	FFC/FPC (1-25)	
CN740	QGF1205F2-05	CONNECTOR	FFC/FPC (1-5)	
CN750	QGF1205F2-11	CONNECTOR	FFC/FPC (1-11)	
CN760	QGF1205C2-08	CONNECTOR	FFC/FPC (1-8)	
CN787	QGF1210G1-05	CONNECTOR	FFC/FPC (1-5)	
CN800	QGF1036C2-10	CONNECTOR	FFC/FPC (1-10)	
CN810	QGF1036C2-08	CONNECTOR	FFC/FPC (1-8)	
CN820	QGF1205C2-08	CONNECTOR	FFC/FPC (1-8)	
CN830	QGF1205C2-19	CONNECTOR	FFC/FPC (1-19)	
CN850	QGB2510J1-13	CONNECTOR	B-B (1-13)	
CN860	QGB2510K2-04	CONNECTOR	B-B (1-4)	
CN901	QGF1205F2-05	CONNECTOR	FFC/FPC (1-5)	
FW910	QUM153-21DG24-E	FLAT WIRE		
J700	QNB0300-002	SPK TERMINAL		
J800	QNN0420-001	SURROUND JACK		
J901	QNS0252-001	MIC JACK		
J902	QNS0252-001	MIC JACK		
J910	QNS0266-001	JACK		
K8000	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
K8001	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
K9100	QQR0621-001Z	COIL		
RY712	QSK0109-001	RELAY		
RY734	QSK0109-001	RELAY		
RY756	QSK0109-001	RELAY		
RY767	QSK0109-001	RELAY		
X7700	QAX0711-002Z	CRYSTAL	8.000000MHz	

Amplifier board (DX-T77)

Block No. [0][5]

△ Symbol No.	Part No.	Part Name	Description	Local
IC500	PT6305	FL DRIVER		
IC510	GP1UM281XKV F	IR DETECT UNIT		
△ IC601	STK402-240	IC		
△ IC602	KIA7809API	IC		
△ IC603	KIA7805API	IC		
△ IC604	KIA7809API	IC		
△ IC605	KIA278R05PI	IC		
△ IC606	KIA278R09PI	IC		
△ IC607	KIA7808API	IC		
△ IC608	KIA7805API	IC		
△ IC650	STK413-430	IC		
Q5004	KRC102M-T	DIGI TRANSISTOR		
Q5005	KRC102M-T	DIGI TRANSISTOR		
Q5006	KRC102M-T	DIGI TRANSISTOR		
Q5007	KRC102M-T	DIGI TRANSISTOR		
Q5008	KTA1023/OY/-T	TRANSISTOR		
Q5009	KRC102M-T	DIGI TRANSISTOR		
Q5010	KRC110M-T	TRANSISTOR		
Q5011	KTC3199/GL/-T	TRANSISTOR		
Q6001	KRC102M-T	DIGI TRANSISTOR		
Q6002	KTA1267/YG/-T	TRANSISTOR		
Q6211	KTC3199/GL/-T	TRANSISTOR		
Q6221	KTC3199/GL/-T	TRANSISTOR		
Q6231	KTC3199/GL/-T	TRANSISTOR		
Q6351	KTC3203/OY/-T	TRANSISTOR		
Q6352	KRC102M-T	DIGI TRANSISTOR		
Q6511	KTC3199/GL/-T	TRANSISTOR		
Q6521	KTC3199/GL/-T	TRANSISTOR		
Q6531	KTC3199/GL/-T	TRANSISTOR		
Q6601	KTC3200/GL/-T	TRANSISTOR		
Q6602	KTA1023/OY/-T	TRANSISTOR		
Q6603	KTA1268/GL/-T	TRANSISTOR		
Q6604	KTC1027/OY/-T	TRANSISTOR		
Q6701	KTC3200/GL/-T	TRANSISTOR		
Q6702	KTA1268/GL/-T	TRANSISTOR		
Q6703	KTC3199/GL/-T	TRANSISTOR		
Q6704	KTA1268/GL/-T	TRANSISTOR		
D5004	SLI-343URC-W-T	LED		
D5005	SLI-343URC-W-T	LED		
D5006	SELU2E10C-P	LED		
D5007	SLR-343VC-T	LED		
D6001	MTZJ9.1B-T2	Z DIODE		
D6002	MTZJ9.1B-T2	Z DIODE		
D6211	1SS133-T2	SI DIODE		
D6221	1SS133-T2	SI DIODE		
D6231	1SS133-T2	SI DIODE		
D6311	MTZJ11B-T2	Z DIODE		
D6321	MTZJ6.2B-T2	Z DIODE		
D6331	MTZJ11B-T2	Z DIODE		
D6341	1SS133-T2	SI DIODE		
D6342	MTZJ6.2B-T2	Z DIODE		
D6351	MTZJ13B-T2	Z DIODE		
D6352	1SS133-T2	SI DIODE		
D6353	MTZJ4.3B-T2	Z DIODE		
D6361	MTZJ11B-T2	Z DIODE		
D6511	1SS133-T2	SI DIODE		
D6521	1SS133-T2	SI DIODE		
D6531	1SS133-T2	SI DIODE		
D6601	1SS133-T2	SI DIODE		
D6701	1SS133-T2	SI DIODE		
D6801	MTZJ15B-T2	Z DIODE		
D6802	MTZJ15B-T2	Z DIODE		
D6803	MTZJ36B-T2	Z DIODE		
D6804	MTZJ36B-T2	Z DIODE		
C5000	QETN1HM-226Z	E CAPACITOR	22uF 50V M	
C5001	QETN1HM-226Z	E CAPACITOR	22uF 50V M	
C5002	QDGB1HK-102Y	C CAPACITOR	1000pF 50V K	
C5003	QEK1EM-106Z	E CAPACITOR	10uF 25V M	
C5004	QCBB1HK-104Y	C CAPACITOR	0.1uF 50V K	
C5005	QCBB1HK-101Y	C CAPACITOR	100pF 50V K	
C5006	QEK1AM-107Z	E CAPACITOR	100uF 10V M	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
C5007	QCBB1HK-104Y	C CAPACITOR	0.1uF 50V K		R5009	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
C5008	QCBB1HK-103Y	C CAPACITOR	0.01uF 50V K		R5010	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
C6001	QETN1HM-107Z	E CAPACITOR	100uF 50V M		R5011	QRE141J-122Y	C RESISTOR	1.2kΩ 1/4W J	
C6002	QETN1HM-106Z	E CAPACITOR	10uF 50V M		R5012	QRE141J-182Y	C RESISTOR	1.8kΩ 1/4W J	
C6003	QETN1HM-106Z	E CAPACITOR	10uF 50V M		R5013	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	
C6004	QETN1HM-107Z	E CAPACITOR	100uF 50V M		R5014	QRE141J-272Y	C RESISTOR	2.7kΩ 1/4W J	
C6005	QETN1HM-105Z	E CAPACITOR	1uF 50V M		R5015	QRE141J-392Y	C RESISTOR	3.9kΩ 1/4W J	
C6111	QCBB1HK-221Y	C CAPACITOR	220pF 50V K		R5016	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
C6112	QETN1HM-106Z	E CAPACITOR	10uF 50V M		R5017	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
C6113	QCBB1HK-471Y	C CAPACITOR	470pF 50V K		R5018	QRE141J-122Y	C RESISTOR	1.2kΩ 1/4W J	
C6121	QCBB1HK-221Y	C CAPACITOR	220pF 50V K		R5019	QRE141J-182Y	C RESISTOR	1.8kΩ 1/4W J	
C6122	QETN1HM-106Z	E CAPACITOR	10uF 50V M		R5020	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	
C6123	QCBB1HK-471Y	C CAPACITOR	470pF 50V K		R5021	QRE141J-272Y	C RESISTOR	2.7kΩ 1/4W J	
C6131	QCBB1HK-221Y	C CAPACITOR	220pF 50V K		R5022	QRE141J-392Y	C RESISTOR	3.9kΩ 1/4W J	
C6132	QETN1HM-106Z	E CAPACITOR	10uF 50V M		R5023	QRE141J-562Y	C RESISTOR	5.6kΩ 1/4W J	
C6133	QCBB1HK-471Y	C CAPACITOR	470pF 50V K		R5024	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
C6211	QETN1JM-476Z	E CAPACITOR	47uF 63V M		R5025	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
C6212	QCSB1HJ-150Y	C CAPACITOR	15pF 50V J		R5026	QRE141J-122Y	C RESISTOR	1.2kΩ 1/4W J	
C6213	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J		R5027	QRE141J-182Y	C RESISTOR	1.8kΩ 1/4W J	
C6214	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J		R5028	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	
C6221	QETN1JM-476Z	E CAPACITOR	47uF 63V M		R5029	QRE141J-272Y	C RESISTOR	2.7kΩ 1/4W J	
C6222	QCSB1HJ-150Y	C CAPACITOR	15pF 50V J		R5030	QRE141J-392Y	C RESISTOR	3.9kΩ 1/4W J	
C6223	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J		R5035	QRE141J-161Y	C RESISTOR	160Ω 1/4W J	
C6224	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J		R5036	QRE141J-161Y	C RESISTOR	160Ω 1/4W J	
C6231	QETN1JM-476Z	E CAPACITOR	47uF 63V M		R5037	QRE141J-560Y	C RESISTOR	56Ω 1/4W J	
C6232	QCSB1HJ-150Y	C CAPACITOR	15pF 50V J		R5038	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
C6233	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J		R5039	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
C6234	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J		R5040	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
C6311	QETN1EM-476Z	E CAPACITOR	47uF 25V M		R5041	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
C6312	QETN1CM-107Z	E CAPACITOR	100uF 16V M		R5042	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
C6321	QETN1EM-476Z	E CAPACITOR	47uF 25V M		R5043	QRE141J-271Y	C RESISTOR	270Ω 1/4W J	
C6322	QETN1CM-107Z	E CAPACITOR	100uF 16V M		R5044	QRE141J-821Y	C RESISTOR	820Ω 1/4W J	
C6331	QETN1EM-476Z	E CAPACITOR	47uF 25V M		R5045	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
C6332	QETN1CM-107Z	E CAPACITOR	100uF 16V M		R5046	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
C6341	QETN1EM-476Z	E CAPACITOR	47uF 25V M		R5050	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
C6342	QETN1CM-107Z	E CAPACITOR	100uF 16V M		R6001	QRJ146J-101X	UNF C RESISTOR	100Ω 1/4W J	
C6361	QETN1EM-476Z	E CAPACITOR	47uF 25V M		R6002	QRJ146J-101X	UNF C RESISTOR	100Ω 1/4W J	
C6362	QETN1CM-107Z	E CAPACITOR	100uF 16V M		R6003	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
C6401	QETN1EM-476Z	E CAPACITOR	47uF 25V M		R6004	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
C6402	QETN1CM-107Z	E CAPACITOR	100uF 16V M		R6005	QRE141J-333Y	C RESISTOR	33kΩ 1/4W J	
C6511	QETN1JM-476Z	E CAPACITOR	47uF 63V M		R6006	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J	
C6512	QCSB1HJ-220Y	C CAPACITOR	22pF 50V J		R6111	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
C6513	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J		R6112	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J	
C6514	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J		R6121	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
C6521	QETN1JM-476Z	E CAPACITOR	47uF 63V M		R6122	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J	
C6522	QCSB1HJ-220Y	C CAPACITOR	22pF 50V J		R6131	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
C6523	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J		R6132	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J	
C6524	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J		△ R6211	QRT01DJ-R22X	MF RESISTOR	0.22Ω 1W J	
C6531	QETN1JM-476Z	E CAPACITOR	47uF 63V M		R6212	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J	
C6532	QCSB1HK-4R7Y	C CAPACITOR	4.7pF 50V K		△ R6213	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J	
C6533	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J		R6214	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J	
C6534	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J		R6215	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
C6601	QETN1CM-107Z	E CAPACITOR	100uF 16V M		R6216	QRE141J-562Y	C RESISTOR	5.6kΩ 1/4W J	
C6602	QFZ0212-104Z	M CAPACITOR	0.1uF		R6217	QRE141J-473Y	C RESISTOR	47kΩ 1/4W J	
C6603	QFZ0212-104Z	M CAPACITOR	0.1uF		R6218	QRJ146J-821X	UNF C RESISTOR	820Ω 1/4W J	
C6604	QETN1HM-105Z	E CAPACITOR	1uF 50V M		R6219	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
C6701	QETN1HM-106Z	E CAPACITOR	10uF 50V M		△ R6221	QRT01DJ-R22X	MF RESISTOR	0.22Ω 1W J	
C6702	QETN1EM-476Z	E CAPACITOR	47uF 25V M		R6222	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J	
C6703	QETN1HM-106Z	E CAPACITOR	10uF 50V M		△ R6223	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J	
C6911	QCBB1HK-221Y	C CAPACITOR	220pF 50V K		△ R6224	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J	
C6912	QTE1V06-106Z	E CAPACITOR	10uF 35V		R6225	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
C6913	QCBB1HK-101Y	C CAPACITOR	100pF 50V K		R6226	QRE141J-562Y	C RESISTOR	5.6kΩ 1/4W J	
C6921	QCBB1HK-221Y	C CAPACITOR	220pF 50V K		R6227	QRE141J-473Y	C RESISTOR	47kΩ 1/4W J	
C6922	QTE1V06-106Z	E CAPACITOR	10uF 35V		R6228	QRJ146J-821X	UNF C RESISTOR	820Ω 1/4W J	
C6923	QCBB1HK-101Y	C CAPACITOR	100pF 50V K		R6229	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
C6931	QCBB1HK-221Y	C CAPACITOR	220pF 50V K		△ R6231	QRT01DJ-R22X	MF RESISTOR	0.22Ω 1W J	
C6932	QTE1V06-106Z	E CAPACITOR	10uF 35V		R6232	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J	
C6933	QCBB1HK-471Y	C CAPACITOR	470pF 50V K		△ R6233	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J	
					R6234	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J	
R5000	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J		R6235	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R5001	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J		R6236	QRE141J-562Y	C RESISTOR	5.6kΩ 1/4W J	
R5002	QRE141J-122Y	C RESISTOR	1.2kΩ 1/4W J		R6237	QRE141J-473Y	C RESISTOR	47kΩ 1/4W J	
R5003	QRE141J-182Y	C RESISTOR	1.8kΩ 1/4W J		△ R6238	QRJ146J-821X	UNF C RESISTOR	820Ω 1/4W J	
R5004	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J		R6239	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
R5005	QRE141J-272Y	C RESISTOR	2.7kΩ 1/4W J		R6321	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R5006	QRE141J-392Y	C RESISTOR	3.9kΩ 1/4W J		R6342	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R5007	QRE141J-562Y	C RESISTOR	5.6kΩ 1/4W J		R6352	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R5008	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J		R6356	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	

△ Symbol No.	Part No.	Part Name	Description	Local
R6357	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R6358	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R6501	QRE141J-202Y	C RESISTOR	2kΩ 1/4W J	
R6502	QRE141J-202Y	C RESISTOR	2kΩ 1/4W J	
R6503	QRE141J-202Y	C RESISTOR	2kΩ 1/4W J	
R6510	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
△ R6511	QRZ0224-R22	EMIT RESISTOR	0.22Ω	
R6512	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J	
△ R6513	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J	
R6514	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J	
R6515	QRE141J-202Y	C RESISTOR	2kΩ 1/4W J	
R6516	QRE141J-562Y	C RESISTOR	5.6kΩ 1/4W J	
R6517	QRE141J-473Y	C RESISTOR	47kΩ 1/4W J	
△ R6518	QRJ146J-681X	UNF C RESISTOR	680Ω 1/4W J	
R6519	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
R6520	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
△ R6521	QRZ0224-R22	EMIT RESISTOR	0.22Ω	
R6522	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J	
△ R6523	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J	
△ R6524	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J	
R6525	QRE141J-202Y	C RESISTOR	2kΩ 1/4W J	
R6526	QRE141J-562Y	C RESISTOR	5.6kΩ 1/4W J	
R6527	QRE141J-473Y	C RESISTOR	47kΩ 1/4W J	
△ R6528	QRJ146J-681X	UNF C RESISTOR	680Ω 1/4W J	
R6529	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
R6530	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
△ R6531	QRZ0224-R22	EMIT RESISTOR	0.22Ω	
R6532	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J	
△ R6533	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J	
R6534	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J	
R6535	QRE141J-202Y	C RESISTOR	2kΩ 1/4W J	
R6536	QRE141J-562Y	C RESISTOR	5.6kΩ 1/4W J	
R6537	QRE141J-473Y	C RESISTOR	47kΩ 1/4W J	
△ R6538	QRJ146J-681X	UNF C RESISTOR	680Ω 1/4W J	
R6539	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
R6601	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	
R6602	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
R6603	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R6604	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
△ R6605	QRJ146J-470X	UNF C RESISTOR	47Ω 1/4W J	
R6606	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R6607	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
△ R6608	QRJ146J-470X	UNF C RESISTOR	47Ω 1/4W J	
R6701	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R6702	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
R6703	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R6704	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
R6705	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R6706	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
R6801	QRE141J-682Y	C RESISTOR	6.8kΩ 1/4W J	
R6802	QRE141J-682Y	C RESISTOR	6.8kΩ 1/4W J	
R6803	QRE141J-682Y	C RESISTOR	6.8kΩ 1/4W J	
R6804	QRE141J-682Y	C RESISTOR	6.8kΩ 1/4W J	
△ R6805	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J	
R6806	QRE141J-333Y	C RESISTOR	33kΩ 1/4W J	
R6911	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R6912	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J	
R6921	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R6922	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J	
R6931	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R6932	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J	
L6211	QQLZ035-R39	COIL	0.39uH	
L6221	QQLZ035-R39	COIL	0.39uH	
L6231	QQLZ035-R39	COIL	0.39uH	
L6511	QQLZ035-R39	COIL	0.39uH	
L6521	QQLZ035-R39	COIL	0.39uH	
L6531	QQLZ035-R39	COIL	0.39uH	
CN500	QGF1036F2-19	CONNECTOR	FFC/FPC (1-19)	
CN601	QGB2510K2-20	CONNECTOR	B-B (1-20)	
CN602	QGF1205C2-19	CONNECTOR	FFC/FPC (1-19)	
CN603	QGF1205F2-11	CONNECTOR	FFC/FPC (1-11)	
CN604	QGA2501F1-03	CONNECTOR	W-B (1-3)	
CN651	QGB2510K2-16	CONNECTOR	B-B (1-16)	
CN652	QGF1205C2-08	CONNECTOR	FFC/FPC (1-8)	
CN970	QGB2510J1-04	CONNECTOR	B-B (1-4)	
FL500	QLF0150-001	FL TUBE		

△ Symbol No.	Part No.	Part Name	Description	Local
FW500	QUM153-18DGZ4-E	FLAT WIRE		
J970	QNB0301-001	SPK TERMINAL		
S5000	QSW0683-001Z	PUSH SW I.M		
S5001	QSW0683-001Z	PUSH SW I.M		
S5002	QSW0683-001Z	PUSH SW I.M		
S5003	QSW0683-001Z	PUSH SW I.M		
S5004	QSW0683-001Z	PUSH SW I.M		
S5005	QSW0683-001Z	PUSH SW I.M		
S5006	QSW0683-001Z	PUSH SW I.M		
S5007	QSW0683-001Z	PUSH SW I.M		
S5008	QSW0683-001Z	PUSH SW I.M		
S5009	QSW0683-001Z	PUSH SW I.M		
S5010	QSW0683-001Z	PUSH SW I.M		
S5011	QSW0683-001Z	PUSH SW I.M		
S5012	QSW0683-001Z	PUSH SW I.M		
S5013	QSW0683-001Z	PUSH SW I.M		
S5014	QSW0683-001Z	PUSH SW I.M		
S5015	QSW0683-001Z	PUSH SW I.M		
S5016	QSW0683-001Z	PUSH SW I.M		
S5017	QSW0683-001Z	PUSH SW I.M		
S5018	QSW0683-001Z	PUSH SW I.M		
S5019	QSW0683-001Z	PUSH SW I.M		
S5020	QSW0683-001Z	PUSH SW I.M		
S5021	QSW0683-001Z	PUSH SW I.M		
S5022	QSW0683-001Z	PUSH SW I.M		
S5023	QSW0683-001Z	PUSH SW I.M		
S5024	QSW0683-001Z	PUSH SW I.M		
S5025	QSW0683-001Z	PUSH SW I.M		
S5026	QSW0683-001Z	PUSH SW I.M		
S5027	QSW0683-001Z	PUSH SW I.M		
S5028	QSW0683-001Z	PUSH SW I.M		
S5029	QSW0683-001Z	PUSH SW I.M		
S5030	QSW0683-001Z	PUSH SW I.M		
S5031	QSW0683-001Z	PUSH SW I.M		
S5032	QSW0683-001Z	PUSH SW I.M		
S5033	QSW0683-001Z	PUSH SW I.M		
S5034	QSW0683-001Z	PUSH SW I.M		
SP500	GV40205-004A	IC HOLDER		

Primary board (DX-T77)

Block No. [0][6]

△ Symbol No.	Part No.	Part Name	Description	Local
IC920	BH7868FS-X	IC		
IC930	GP1FAV30TK0F	OPT TRANSMITTER		
△ Q1000	KTC2026/Y/	TRANSISTOR		
Q1001	KTC3203/OY/-T	TRANSISTOR		
△ Q2007	KTA1046/Y/	TRANSISTOR		
Q2008	KTC3199/GL/-T	TRANSISTOR		
Q2009	KTC3199/GL/-T	TRANSISTOR		
Q9300	KRA110M-T	TRANSISTOR		
Q9301	KRC110M-T	TRANSISTOR		
Q9303	KTC3199/GL/-T	TRANSISTOR		
△ D1000	1N5402M-20	SI DIODE		
△ D1001	1N5402M-20	SI DIODE		
△ D1002	1N5402M-20	SI DIODE		
△ D1003	1N5402M-20	SI DIODE		
△ D1004	6A10E2	SI DIODE		
△ D1005	6A10E2	SI DIODE		
△ D1006	6A10E2	SI DIODE		
△ D1007	6A10E2	SI DIODE		
△ D1008	6A10E2	SI DIODE		
△ D1009	6A10E2	SI DIODE		
△ D1010	6A10E2	SI DIODE		
△ D1011	6A10E2	SI DIODE		
D1012	MTZJ6.2B-T2	Z DIODE		
D1013	MTZJ18B-T2	Z DIODE		
D1014	MTZJ18B-T2	Z DIODE		
D1015	1N4003S-T5	SI DIODE		
D1016	1N4003S-T5	SI DIODE		
D1017	1N4003S-T5	SI DIODE		

△ Symbol No.	Part No.	Part Name	Description	Local
△ D2001	GBU803	BRIDGE DIODE		
D2008	2A02-M	DIODE		
D2009	MTZJ5.1C-T2	Z DIODE		
D2013	1SS133-T2	SI DIODE		
D9300	2A02-M	DIODE		
D9301	MTZJ3.3B-T2	Z DIODE		
D9302	MTZJ2.0A-T2	Z DIODE		
D9303	MTZJ3.9B-T2	Z DIODE		
D9310	MTZJ3.0B-T2	Z DIODE		
D9311	1SS133-T2	SI DIODE		
D9312	1SS133-T2	SI DIODE		
D9313	1SS133-T2	SI DIODE		
C1002	QETN1HM-226Z	E CAPACITOR	22uF 50V M	
C1003	QETN1HM-226Z	E CAPACITOR	22uF 50V M	
C1004	QCBB1HK-103Y	C CAPACITOR	0.01uF 50V K	
C1005	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C1010	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
C1011	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
C1012	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
C1013	QFZ0228-104Z	M CAPACITOR	0.1uF	
C1014	QFZ0228-104Z	M CAPACITOR	0.1uF	
C1015	QFZ0228-104Z	M CAPACITOR	0.1uF	
C1016	QETN2AM-476Z	E CAPACITOR	47uF 100V M	
C1017	QETN1HM-107Z	E CAPACITOR	100uF 50V M	
C2000	QEZ0706-478	E CAPACITOR	4700uF	
C2004	QEZ0706-478	E CAPACITOR	4700uF	
C2006	QEZ0840-338	E CAPACITOR	3300uF	
C2008	QEZ0840-338	E CAPACITOR	3300uF	
C2009	QFZ0228-104Z	M CAPACITOR	0.1uF	
C2010	QCBB1HK-103Y	C CAPACITOR	0.01uF 50V K	
C2011	QCBB1HK-221Y	C CAPACITOR	220pF 50V K	
C2012	QETM1CM-478	E CAPACITOR	4700uF 16V M	
C2013	QETM1EM-688	E CAPACITOR	6800uF 25V M	
C9200	QETN1AM-477Z	E CAPACITOR	470uF 10V M	
C9204	QCBB1HK-103Y	C CAPACITOR	0.01uF 50V K	
C9206	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
C9209	QETN1HM-226Z	E CAPACITOR	22uF 50V M	
C9211	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
C9213	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
C9215	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
C9216	QCBB1HK-104Y	C CAPACITOR	0.1uF 50V K	
C9218	QETN0JM-477Z	E CAPACITOR	470uF 6.3V M	
C9221	QETN0JM-477Z	E CAPACITOR	470uF 6.3V M	
C9224	QETN0JM-477Z	E CAPACITOR	470uF 6.3V M	
C9227	QETN0JM-477Z	E CAPACITOR	470uF 6.3V M	
C9230	QETN0JM-477Z	E CAPACITOR	470uF 6.3V M	
C9232	QCBB1HK-103Y	C CAPACITOR	0.01uF 50V K	
C9300	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C9303	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
△ R1000	QRK126J-470X	UNF C RESISTOR	47Ω 1/2W J	
R1001	QRE141J-753Y	C RESISTOR	75kΩ 1/4W J	
R1002	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
R1003	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
R1005	QRE141J-753Y	C RESISTOR	75kΩ 1/4W J	
R2000	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
R2001	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
R2002	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
R2003	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
R2004	QRE141J-681Y	C RESISTOR	680Ω 1/4W J	
R2005	QRE141J-272Y	C RESISTOR	2.7kΩ 1/4W J	
R2006	QRE141J-681Y	C RESISTOR	680Ω 1/4W J	
R2007	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	
R2008	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R2009	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R2010	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R2011	QRL01DJ-471X	OMF RESISTOR	470Ω 1W J	
R2012	QRL01DJ-471X	OMF RESISTOR	470Ω 1W J	
R2013	QRE141J-273Y	C RESISTOR	27kΩ 1/4W J	
R9201	QRE141J-431Y	C RESISTOR	430Ω 1/4W J	
R9202	QRE141J-391Y	C RESISTOR	390Ω 1/4W J	
R9203	QRE141J-391Y	C RESISTOR	390Ω 1/4W J	
R9204	QRE141J-131Y	C RESISTOR	130Ω 1/4W J	
R9205	QRE141J-391Y	C RESISTOR	390Ω 1/4W J	
R9206	QRE141J-131Y	C RESISTOR	130Ω 1/4W J	
R9207	QRE141J-391Y	C RESISTOR	390Ω 1/4W J	
R9208	QRE141J-431Y	C RESISTOR	430Ω 1/4W J	

△ Symbol No.	Part No.	Part Name	Description	Local
R9209	QRE141J-391Y	C RESISTOR	390Ω 1/4W J	
R9210	QRE141J-431Y	C RESISTOR	430Ω 1/4W J	
R9218	QRE141J-750Y	C RESISTOR	75Ω 1/4W J	
R9221	QRE141J-750Y	C RESISTOR	75Ω 1/4W J	
R9224	QRE141J-750Y	C RESISTOR	75Ω 1/4W J	
R9227	QRE141J-750Y	C RESISTOR	75Ω 1/4W J	
R9230	QRE141J-750Y	C RESISTOR	75Ω 1/4W J	
R9232	QRE141J-750Y	C RESISTOR	75Ω 1/4W J	
R9300	QRT01DJ-2R2X	MF RESISTOR	2.2Ω 1W J	
R9301	QRE141J-681Y	C RESISTOR	680Ω 1/4W J	
R9302	QRZ9006-4R7X	FUSI RESISTOR	4.7Ω	
R9303	QRE141J-271Y	C RESISTOR	270Ω 1/4W J	
R9310	QRE141J-470Y	C RESISTOR	47Ω 1/4W J	

CN100	QGA7901C1-02	CONNECTOR	W-B (1-2)
CN101	QGA7901C1-04	CONNECTOR	W-B (1-4)
CN102	QGA7901C1-03	CONNECTOR	W-B (1-3)
CN103	QGA3901F1-08	CONNECTOR	W-B (1-8)
CN104	QGB2510J1-13	CONNECTOR	B-B (1-13)
CN105	QGD2503F1-03	CONNECTOR	(1-3)
CN106	QGA3901F2-03	CONNECTOR	W-B (1-3)
CN200	QGB2510J1-16	CONNECTOR	B-B (1-16)
CN201	QGB2510J1-20	CONNECTOR	B-B (1-20)
CN202	QGD2504C1-03Z	CONNECTOR	(1-3)
CN203	QGB2510K2-13	CONNECTOR	B-B (1-13)
CN204	QGB2510K2-13	CONNECTOR	B-B (1-13)
CN920	QGF1205C2-08	CONNECTOR	FFC/FPC (1-8)
CN930	QGF1036C2-28	CONNECTOR	FFC/FPC (1-28)
CN931	QGF1205C2-11	CONNECTOR	FFC/FPC (1-11)
H2001	GV40577-001A	HEAT SINK	
HS202	GV40620-003A	HEAT SINK	
IH920	GV40397-004A	IC HOLDER	
J920	QNN0572-001	PIN JACK	
J921	QNN0557-002	PIN JACK	
PP201	QZW0112-001	WIRE CLAMP	
PP202	QZW0112-001	WIRE CLAMP	
△ S1000	QSW0812-001	VOLTAGE SWITCH	
Z1001	QNG0003-001Z	FUSE CLIP	
Z1002	QNG0003-001Z	FUSE CLIP	
Z1003	QNG0003-001Z	FUSE CLIP	
Z1004	QNG0003-001Z	FUSE CLIP	
Z1005	QNG0003-001Z	FUSE CLIP	
Z1006	QNG0003-001Z	FUSE CLIP	
Z1007	QNG0003-001Z	FUSE CLIP	
Z1008	QNG0003-001Z	FUSE CLIP	
Z1009	QNG0003-001Z	FUSE CLIP	
Z1010	QNG0003-001Z	FUSE CLIP	
Z1011	QNG0003-001Z	FUSE CLIP	
Z1012	QNG0003-001Z	FUSE CLIP	
Z1013	QNG0003-001Z	FUSE CLIP	
Z1014	QNG0003-001Z	FUSE CLIP	
Z1015	QNG0003-001Z	FUSE CLIP	
Z1016	QNG0003-001Z	FUSE CLIP	
Z1017	QNG0003-001Z	FUSE CLIP	
Z1018	QNG0003-001Z	FUSE CLIP	
Z1019	QNG0003-001Z	FUSE CLIP	
Z1020	QNG0003-001Z	FUSE CLIP	

Main board (DX-T66)

Block No. [0][7]

△ Symbol No.	Part No.	Part Name	Description	Local
IC760	SN74AHCT08NS-X IC			
IC770	MN101C49GFA	MASK MICON		
IC771	BR24L02F-W-X	IC(DIGITAL)		
IC810	CD4066BM-X	IC		
IC820	LC75342M-X	IC		
IC830	RC4558D-X	IC		
IC850	M65851FP	IC		
IC860	JCV8011-X	IC		
IC881	RC4558D-X	IC		
IC888	RC4558D-X	IC		
IC901	RC4580ID-X	IC		

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
Q7000	KTC3199/GL/-T	TRANSISTOR			C8030	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
Q7080	KRC107S-X	DIGI TRANSISTOR			C8031	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
Q7081	KRC111S-X	TRANSISTOR			C8032	QTE1H28-106Z	E CAPACITOR	10uF 50V	
Q7788	KRA102S-X	DIGI TRANSISTOR			C8060	QTE1H28-106Z	E CAPACITOR	10uF 50V	
Q7798	KRA102S-X	DIGI TRANSISTOR			C8061	QTE1H28-106Z	E CAPACITOR	10uF 50V	
Q8000	KTC2875-X	CHIP TR.			C8062	QTE1V06-106Z	E CAPACITOR	10uF 35V	
Q8030	KTC3875/YG/-X	TRANSISTOR			C8101	QTE1V06-106Z	E CAPACITOR	10uF 35V	
Q8031	KTC3875/YG/-X	TRANSISTOR			C8102	QTE1V06-106Z	E CAPACITOR	10uF 35V	
Q8032	KTC3875/YG/-X	TRANSISTOR			C8120	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
Q8040	KTC2875-X	CHIP TR.			C8121	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
Q8100	KTC2875-X	CHIP TR.			C8122	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
Q8130	KTC3875/YG/-X	TRANSISTOR			C8123	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
Q8131	KTC3875/YG/-X	TRANSISTOR			C8125	QTE1H28-106Z	E CAPACITOR	10uF 50V	
Q8132	KTC3875/YG/-X	TRANSISTOR			C8126	QFG32AJ-272Z	PP CAPACITOR	2700pF 100V J	
Q8140	KTC2875-X	CHIP TR.			C8127	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
Q8211	KRC104S-X	TRANSISTOR			C8128	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
Q8212	KRC104S-X	TRANSISTOR			C8130	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
Q8260	KTC3199/GL/-T	TRANSISTOR			C8131	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
Q8401	KRC109S-X	TRANSISTOR			C8132	QTE1H28-106Z	E CAPACITOR	10uF 50V	
Q8403	KTC3875/YG/-X	TRANSISTOR			C8160	QTE1H28-106Z	E CAPACITOR	10uF 50V	
Q8404	KTC3875/YG/-X	TRANSISTOR			C8161	QTE1H28-106Z	E CAPACITOR	10uF 50V	
Q8405	KTC2875-X	CHIP TR.			C8162	QTE1V06-106Z	E CAPACITOR	10uF 35V	
Q8524	KTC3203/OY/-T	TRANSISTOR			C8180	QFLC1HJ-123Z	M CAPACITOR	0.012uF 50V J	
Q8900	KRA104S-X	DIGI TRANSISTOR			C8181	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
Q9001	KTC3875/YG/-X	TRANSISTOR			C8182	QFLC1HJ-822Z	M CAPACITOR	8200pF 50V J	
Q9002	KTC3875/YG/-X	TRANSISTOR			C8221	QCB81HK-103Y	C CAPACITOR	0.01uF 50V K	
Q9100	KRA111S-X	D. TRANSISTOR			C8222	QTE1C06-107Z	E CAPACITOR	100uF 16V	
Q9101	KTC2875-X	CHIP TR.			C8230	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
Q9102	KTC2875-X	CHIP TR.			C8232	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
Q9103	KTC2875-X	CHIP TR.			C8261	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
Q9104	KTC2875-X	CHIP TR.			C8262	QFLC1HJ-223Z	M CAPACITOR	0.022uF 50V J	
D7000	1SS133-T2	SI DIODE			C8263	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M	
D7001	1SS133-T2	SI DIODE			C8264	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
D7050	MTZJ5.1B-T2	Z DIODE			C8265	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
D7080	1SS133-T2	SI DIODE			C8266	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
D7081	MTZJ4.7B-T2	Z DIODE			C8267	QETN1EM-336Z	E CAPACITOR	33uF 25V M	
D7082	1SS133-T2	SI DIODE			C8268	QETN1HM-224Z	E CAPACITOR	0.22uF 50V M	
D7151	1SS133-T2	SI DIODE			C8269	QTE1H28-105Z	E CAPACITOR	1uF 50V	
D7152	1SS133-T2	SI DIODE			C8360	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
D7153	1SS133-T2	SI DIODE			C8361	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
D7390	1SS133-T2	SI DIODE			C8362	QETN1HM-474Z	E CAPACITOR	0.47uF 50V M	
D7711	1SS133-T2	SI DIODE			C8363	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
D7713	1N4003S-T5	SI DIODE			C8401	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
D8230	1SS133-T2	SI DIODE			C8403	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
D8401	1SS133-T2	SI DIODE			C8407	QETN1JM-476Z	E CAPACITOR	47uF 63V M	
D8406	MTZJ3.9B-T2	Z DIODE			C8430	NCB31HK-222X	C CAPACITOR	2200pF 50V K	
D8407	MTZJ3.9B-T2	Z DIODE			C8431	NCB31HK-222X	C CAPACITOR	2200pF 50V K	
D8524	MTZJ5.6B-T2	Z DIODE			C8432	NCB31HK-222X	C CAPACITOR	2200pF 50V K	
D9001	1SS133-T2	SI DIODE			C8433	NCB31HK-222X	C CAPACITOR	2200pF 50V K	
D9002	1SS133-T2	SI DIODE			C8434	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
C7050	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	T66EE,T66US, T66UX,T66UY, T66UG,T66UN T66UW	C8437	QETN1HM-104Z	E CAPACITOR	0.1uF 50V M	
C7050	QETN1CM-107Z	E CAPACITOR	100uF 16V M		C8502	QFLC1HJ-152Z	M CAPACITOR	1500pF 50V J	
C7080	NCB31HK-102X	C CAPACITOR	1000pF 50V K		C8504	QFLC1HJ-152Z	M CAPACITOR	1500pF 50V J	
C7082	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M		C8506	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M	
C7083	NCB31HK-103X	C CAPACITOR	0.01uF 50V K		C8508	QFLC1HJ-102Z	M CAPACITOR	1000pF 50V J	
C7085	QETN0JM-108Z	E CAPACITOR	1000uF 6.3V M		C8509	QFLC1HJ-332Z	M CAPACITOR	3300pF 50V J	
C7101	QCB81HK-101Y	C CAPACITOR	100pF 50V K		C8512	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M	
C7710	QCB81HK-103Y	C CAPACITOR	0.01uF 50V K		C8513	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M	
C7711	QETN1CM-107Z	E CAPACITOR	100uF 16V M		C8514	QFLC1HJ-102Z	M CAPACITOR	1000pF 50V J	
C7712	NCS31HJ-200X	C CAPACITOR	20pF 50V J		C8515	QFLC1HJ-472Z	M CAPACITOR	4700pF 50V J	
C7713	NCS31HJ-180X	C CAPACITOR	18pF 50V J		C8516	QFLC1HJ-683Z	M CAPACITOR	0.068uF 50V J	
C7788	QETN1HM-106Z	E CAPACITOR	10uF 50V M		C8520	QFLC1HJ-683Z	M CAPACITOR	0.068uF 50V J	
C7798	QETN1CM-107Z	E CAPACITOR	100uF 16V M		C8522	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
C8001	QTE1V06-106Z	E CAPACITOR	10uF 35V		C8524	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C8002	QTE1V06-106Z	E CAPACITOR	10uF 35V		C8525	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C8020	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M		C8531	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C8021	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M		C8540	QFLC1HJ-102Z	M CAPACITOR	1000pF 50V J	
C8022	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M		C8541	QFLC1HJ-472Z	M CAPACITOR	4700pF 50V J	
C8023	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M		C8542	QFLC1HJ-683Z	M CAPACITOR	0.068uF 50V J	
C8025	QTE1H28-106Z	E CAPACITOR	10uF 50V		C8546	QFLC1HJ-102Z	M CAPACITOR	1000pF 50V J	
C8026	QFG32AJ-272Z	PP CAPACITOR	2700pF 100V J		C8550	QFLC1HJ-472Z	M CAPACITOR	4700pF 50V J	
C8027	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J		C8552	QFVF1HJ-224Z	MF CAPACITOR	0.22uF 50V J	
C8028	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J		C8555	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
					C8556	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
					C8574	QTE1V06-106Z	E CAPACITOR	10uF 35V	
					C8575	QTE1V06-106Z	E CAPACITOR	10uF 35V	
					C8576	QFVF1HJ-154Z	MF CAPACITOR	0.15uF 50V J	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
C8578	QETN1HM-105Z	E CAPACITOR	1uF 50V M		R7737	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C8579	QETN1HM-105Z	E CAPACITOR	1uF 50V M		R7738	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C8581	NCB31AK-154X	C CAPACITOR	0.15uF 10V K		R7739	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C8583	NCB31AK-154X	C CAPACITOR	0.15uF 10V K		R7740	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C8590	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R7742	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C8591	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R7743	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C8593	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R7744	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C8597	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R7745	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C8598	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R7746	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C8900	QETN1HM-105Z	E CAPACITOR	1uF 50V M		R7747	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C9000	NCB31HK-222X	C CAPACITOR	2200pF 50V K		R7748	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C9001	QETN1HM-104Z	E CAPACITOR	0.1uF 50V M		R7749	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C9003	QEK1EM-106Z	E CAPACITOR	10uF 25V M		R7751	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	
C9004	QEK1HM-474Z	E CAPACITOR	0.47uF 50V M		R7752	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	
C9005	QEK1HM-104Z	E CAPACITOR	0.1uF 50V M		R7753	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
C9006	QETN1HM-105Z	E CAPACITOR	1uF 50V M		R7754	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
C9007	QEK1HM-104Z	E CAPACITOR	0.1uF 50V M		R7755	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
C9008	QETN1HM-105Z	E CAPACITOR	1uF 50V M		R7756	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C9009	QETN1EM-476Z	E CAPACITOR	47uF 25V M		R7759	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	T66US,T66UN
C9010	QEK1CM-107Z	E CAPACITOR	100uF 16V M		R7760	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	T66UW,T66UY
C9021	NCB31HK-102X	C CAPACITOR	1000pF 50V K		R7761	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	T66UX,T66UG
C9022	NCB31HK-102X	C CAPACITOR	1000pF 50V K		R7762	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
C9030	NDC31HJ-680X	C CAPACITOR	68pF 50V J		R7763	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
C9031	NDC31HJ-680X	C CAPACITOR	68pF 50V J		R7766	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C9032	NDC31HJ-680X	C CAPACITOR	68pF 50V J		R7767	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
C9033	NDC31HJ-680X	C CAPACITOR	68pF 50V J		R7768	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
C9034	QEK1HM-474Z	E CAPACITOR	0.47uF 50V M		R7769	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C9101	QDGB1HK-102Y	C CAPACITOR	1000pF 50V K		R7770	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C9102	QDGB1HK-102Y	C CAPACITOR	1000pF 50V K		R7771	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
C9103	QDXB1CM-392Y	C CAPACITOR	3900pF 16V M		R7772	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	
C9104	QDXB1CM-392Y	C CAPACITOR	3900pF 16V M		R7773	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	
C9105	QDGB1HK-102Y	C CAPACITOR	1000pF 50V K		R7774	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
					R7775	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7000	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J		R7776	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7001	QRL01DJ-151X	OMF RESISTOR	150Ω 1W J		R7777	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7002	QRL01DJ-151X	OMF RESISTOR	150Ω 1W J		R7778	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7003	QRL01DJ-151X	OMF RESISTOR	150Ω 1W J		R7779	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7004	QRL01DJ-151X	OMF RESISTOR	150Ω 1W J		R7780	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7005	QRL01DJ-151X	OMF RESISTOR	150Ω 1W J		R7781	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7006	QRL01DJ-151X	OMF RESISTOR	150Ω 1W J		R7786	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7050	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J		R7788	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7080	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J		R7789	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7081	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R7790	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7082	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R7791	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7083	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J		R7792	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7084	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J		R7796	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7085	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J		R7797	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7151	QRE141J-123Y	C RESISTOR	12kΩ 1/4W J		R7798	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R7152	QRE141J-123Y	C RESISTOR	12kΩ 1/4W J		R7799	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7153	QRE141J-123Y	C RESISTOR	12kΩ 1/4W J		R7803	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7200	QRE141J-273Y	C RESISTOR	27kΩ 1/4W J		R7804	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7251	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J		R7805	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7252	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J		R7806	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7253	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J		R7807	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7600	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J		R7808	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7702	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J		R7809	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7703	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R7821	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7704	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R7823	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7705	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R7824	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7706	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R7825	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7707	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J		R7852	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R7708	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J						
R7709	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J		R7859	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	T66EE,T66UW, T66UX,T66UY, T66UG
R7715	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J						T66EE,T66US, T66UX,T66UG, T66UN
R7717	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R7860	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	T66EE,T66US, T66UX,T66UY, T66UN
R7718	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J						T66EE,T66US, T66UW,T66UY, T66UN
R7719	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J		R7861	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7720	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J						
R7721	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J		R7867	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7722	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J		R7871	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R7723	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J		R7875	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R7724	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J		R7876	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7725	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J		R7878	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R7726	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J		R7879	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7728	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J		R7881	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R7731	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J		R7886	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7732	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R7892	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R7735	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J						

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
R7897	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R8267	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R8004	NRSA63J-113X	MG RESISTOR	11kΩ 1/16W J		R8268	NRSA63J-622X	MG RESISTOR	6.2kΩ 1/16W J	
R8005	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R8269	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	
R8006	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R8293	QRE141J-393Y	C RESISTOR	39kΩ 1/4W J	
R8020	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J		R8335	QRE141J-224Y	C RESISTOR	220kΩ 1/4W J	
R8021	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J		R8401	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	
R8030	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J		R8402	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	
R8031	QRE141J-332Y	C RESISTOR	3.3kΩ 1/4W J		R8403	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R8032	QRE141J-123Y	C RESISTOR	12kΩ 1/4W J		R8404	NRSA63J-683X	MG RESISTOR	68kΩ 1/16W J	
R8033	QRE141J-124Y	C RESISTOR	120kΩ 1/4W J		R8405	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R8034	QRE141J-473Y	C RESISTOR	47kΩ 1/4W J		R8407	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R8035	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J		R8409	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R8036	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J		R8412	QRE141J-163Y	C RESISTOR	16kΩ 1/4W J	
R8042	QRE141J-392Y	C RESISTOR	3.9kΩ 1/4W J		R8413	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R8043	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R8414	NRSA63J-163X	MG RESISTOR	16kΩ 1/16W J	
R8046	QRE141J-822Y	C RESISTOR	8.2kΩ 1/4W J		R8415	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R8060	QRE141J-562Y	C RESISTOR	5.6kΩ 1/4W J		R8416	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R8061	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J		R8417	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8062	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R8418	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
R8089	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J		R8430	NRSA63J-912X	MG RESISTOR	9.1kΩ 1/16W J	
R8090	QRE141J-363Y	C RESISTOR	36kΩ 1/4W J		R8431	NRSA63J-912X	MG RESISTOR	9.1kΩ 1/16W J	
R8091	QRE141J-153Y	C RESISTOR	15kΩ 1/4W J		R8432	NRSA63J-912X	MG RESISTOR	9.1kΩ 1/16W J	
R8092	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J		R8433	NRSA63J-912X	MG RESISTOR	9.1kΩ 1/16W J	
R8093	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J		R8434	NRSA63J-824X	MG RESISTOR	820kΩ 1/16W J	
R8094	NRSA63J-363X	MG RESISTOR	36kΩ 1/16W J		R8435	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R8095	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J		R8507	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R8096	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R8508	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J	
R8097	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J		R8509	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J	
R8098	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J		R8510	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J	
R8099	QRE141J-105Y	C RESISTOR	1MΩ 1/4W J		R8511	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J	
R8104	NRSA63J-113X	MG RESISTOR	11kΩ 1/16W J		R8512	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J	
R8105	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R8513	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J	
R8106	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R8514	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J	
R8120	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J		R8521	QRE141J-243Y	C RESISTOR	24kΩ 1/4W J	
R8121	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J		R8523	QRZ9006-4R7X	FUSI RESISTOR	4.7Ω	
R8130	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J		R8524	QRE141J-561Y	C RESISTOR	560Ω 1/4W J	
R8131	QRE141J-332Y	C RESISTOR	3.3kΩ 1/4W J		R8529	NRSA63J-113X	MG RESISTOR	11kΩ 1/16W J	
R8132	QRE141J-123Y	C RESISTOR	12kΩ 1/4W J		R8578	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R8133	QRE141J-124Y	C RESISTOR	120kΩ 1/4W J		R8579	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	
R8134	QRE141J-473Y	C RESISTOR	47kΩ 1/4W J		R8900	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R8135	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J		R9000	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8136	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J		R9001	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R8142	QRE141J-392Y	C RESISTOR	3.9kΩ 1/4W J		R9002	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R8143	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R9003	NRSA63J-274X	MG RESISTOR	270kΩ 1/16W J	
R8146	QRE141J-822Y	C RESISTOR	8.2kΩ 1/4W J		R9004	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R8160	QRE141J-562Y	C RESISTOR	5.6kΩ 1/4W J		R9005	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R8161	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J		R9006	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	
R8162	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R9007	NRSA63J-474X	MG RESISTOR	470kΩ 1/16W J	
R8180	QRE141J-223Y	C RESISTOR	22kΩ 1/4W J		R9010	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R8182	QRE141J-333Y	C RESISTOR	33kΩ 1/4W J		R9011	NRSA63J-824X	MG RESISTOR	820kΩ 1/16W J	
R8183	QRE141J-223Y	C RESISTOR	22kΩ 1/4W J		R9012	NRSA63J-163X	MG RESISTOR	16kΩ 1/16W J	
R8189	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J		R9013	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8190	QRE141J-363Y	C RESISTOR	36kΩ 1/4W J		R9014	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8191	QRE141J-153Y	C RESISTOR	15kΩ 1/4W J		R9015	QRE141J-221Y	C RESISTOR	220Ω 1/4W J	
R8192	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J		R9017	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R8193	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J		R9021	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R8194	NRSA63J-363X	MG RESISTOR	36kΩ 1/16W J		R9022	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R8195	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J		R9030	NRSA63J-564X	MG RESISTOR	560kΩ 1/16W J	
R8196	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R9031	NRSA63J-564X	MG RESISTOR	560kΩ 1/16W J	
R8197	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J		R9032	NRSA63J-564X	MG RESISTOR	560kΩ 1/16W J	
R8198	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J		R9033	NRSA63J-564X	MG RESISTOR	560kΩ 1/16W J	
R8199	QRE141J-105Y	C RESISTOR	1MΩ 1/4W J		R9034	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R8211	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J		R9035	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	
R8212	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R9036	QRE141J-101Y	C RESISTOR	100Ω 1/4W J	
R8223	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R9101	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R8224	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R9102	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R8225	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R9103	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R8230	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J		R9104	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R8231	QRE141J-512Y	C RESISTOR	5.1kΩ 1/4W J		VR901	QVQ0342-B24	V RESISTOR		
R8232	QRE141J-753Y	C RESISTOR	75kΩ 1/4W J						
R8235	QRE141J-224Y	C RESISTOR	220kΩ 1/4W J		L9100	QQL231K-2R2Y	COIL	2.2uH K	
R8260	NRSA63J-474X	MG RESISTOR	470kΩ 1/16W J		L9101	QQL231K-470Y	COIL	47uH K	
R8261	NRSA63J-474X	MG RESISTOR	470kΩ 1/16W J		L9102	QQL231K-470Y	COIL	47uH K	
R8262	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J						
R8263	NRSA63J-475X	MG RESISTOR	4.7MΩ 1/16W J		CN720	QGF1036C2-19	CONNECTOR	FFC/FPC (1-19)	
R8264	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J		CN730	QGF1205C2-25	CONNECTOR	FFC/FPC (1-25)	
R8265	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J		CN740	QGF1205F2-05	CONNECTOR	FFC/FPC (1-5)	
R8266	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J		CN750	QGF1205F2-11	CONNECTOR	FFC/FPC (1-11)	

△ Symbol No.	Part No.	Part Name	Description	Local
CN760	QGF1205C2-08	CONNECTOR	FFC/FPC (1-8)	
CN787	QGF1210G1-05	CONNECTOR	FFC/FPC (1-5)	
CN800	QGF1036C2-10	CONNECTOR	FFC/FPC (1-10)	
CN820	QGF1205C2-08	CONNECTOR	FFC/FPC (1-8)	
CN830	QGF1205C2-13	CONNECTOR	FFC/FPC (1-13)	
CN850	QGB2510J1-07	CONNECTOR	B-B (1-7)	
CN901	QGF1205F2-05	CONNECTOR	FFC/FPC (1-5)	
FW910	QUM153-21DGZ4-E	FLAT WIRE		
J700	QNB0288-001	SPK TERMINAL		
J701	QNN0792-001	JACK		
J800	QNN0420-001	SURROUND JACK		
J901	QNS0252-001	MIC JACK		
J902	QNS0252-001	MIC JACK		
J910	QNS0266-001	JACK		
K9100	QQR0621-001Z	COIL		
RY712	QSK0109-001	RELAY		
RY767	QSK0109-001	RELAY		
X7700	QAX0711-002Z	CRYSTAL	8.000000MHz	

Amplifier board (DX-T66)

Block No. [0][8]

△ Symbol No.	Part No.	Part Name	Description	Local
IC500	PT6305	FL DRIVER		
IC510	GP1UM281XKVF	IR DETECT UNIT		
△ IC602	KIA7809API	IC		
△ IC603	KIA7805API	IC		
△ IC604	KIA7809API	IC		
△ IC605	KIA278R05PI	IC		
△ IC606	KIA278R09PI	IC		
△ IC607	KIA7808API	IC		
△ IC608	KIA7805API	IC		
△ IC650	STK413-430	IC		
Q5004	KRC102M-T	DIGI TRANSISTOR		
Q5005	KRC102M-T	DIGI TRANSISTOR		
Q5006	KRC102M-T	DIGI TRANSISTOR		
Q5007	KRC102M-T	DIGI TRANSISTOR		
Q5008	KTA1023/OY/-T	TRANSISTOR		
Q5009	KRC102M-T	DIGI TRANSISTOR		
Q5010	KRC110M-T	TRANSISTOR		
Q5011	KTC3199/GL/-T	TRANSISTOR		
Q6351	KTC3203/OY/-T	TRANSISTOR		
Q6352	KRC102M-T	DIGI TRANSISTOR		
Q6511	KTC3199/GL/-T	TRANSISTOR		
Q6521	KTC3199/GL/-T	TRANSISTOR		
Q6531	KTC3199/GL/-T	TRANSISTOR		
Q6601	KTC3200/GL/-T	TRANSISTOR		
Q6602	KTA1023/OY/-T	TRANSISTOR		
Q6603	KTA1268/GL/-T	TRANSISTOR		
Q6604	KTC1027/OY/-T	TRANSISTOR		
Q6701	KTC3200/GL/-T	TRANSISTOR		
Q6702	KTA1268/GL/-T	TRANSISTOR		
Q6703	KTC3199/GL/-T	TRANSISTOR		
Q6704	KTA1268/GL/-T	TRANSISTOR		
D5004	SLI-343URC-W-T	LED		
D5005	SLI-343URC-W-T	LED		
D5006	SELU2E10C-P	LED		
D5007	SLR-343VC-T	LED		
D6311	MTZJ11B-T2	Z DIODE		
D6321	MTZJ6.2B-T2	Z DIODE		
D6331	MTZJ11B-T2	Z DIODE		
D6341	1SS133-T2	SI DIODE		
D6342	MTZJ6.2B-T2	Z DIODE		
D6351	MTZJ13B-T2	Z DIODE		
D6352	1SS133-T2	SI DIODE		
D6353	MTZJ4.3B-T2	Z DIODE		
D6361	MTZJ11B-T2	Z DIODE		
D6511	1SS133-T2	SI DIODE		
D6521	1SS133-T2	SI DIODE		
D6531	1SS133-T2	SI DIODE		

△ Symbol No.	Part No.	Part Name	Description	Local
D6601	1SS133-T2	SI DIODE		
D6701	1SS133-T2	SI DIODE		
D6801	MTZJ15B-T2	Z DIODE		
D6802	MTZJ15B-T2	Z DIODE		
D6803	MTZJ36B-T2	Z DIODE		
D6804	MTZJ36B-T2	Z DIODE		
C5000	QETN1HM-226Z	E CAPACITOR	22uF 50V M	
C5001	QETN1HM-226Z	E CAPACITOR	22uF 50V M	
C5002	QDGB1HK-102Y	C CAPACITOR	1000pF 50V K	
C5003	QKCC1EM-106Z	E CAPACITOR	10uF 25V M	
C5004	QCBB1HK-104Y	C CAPACITOR	0.1uF 50V K	
C5005	QCBB1HK-101Y	C CAPACITOR	100pF 50V K	
C5006	QKCC1AM-107Z	E CAPACITOR	100uF 10V M	
C5007	QCBB1HK-104Y	C CAPACITOR	0.1uF 50V K	
C5008	QCBB1HK-103Y	C CAPACITOR	0.01uF 50V K	
C6311	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
C6312	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C6321	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
C6322	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C6331	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
C6332	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C6341	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
C6342	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C6361	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
C6362	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C6401	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
C6402	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C6511	QETN1JM-476Z	E CAPACITOR	47uF 63V M	
C6512	QCSB1HJ-220Y	C CAPACITOR	22pF 50V J	
C6513	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
C6514	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
C6521	QETN1JM-476Z	E CAPACITOR	47uF 63V M	
C6522	QCSB1HJ-220Y	C CAPACITOR	22pF 50V J	
C6523	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
C6524	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
C6531	QETN1JM-476Z	E CAPACITOR	47uF 63V M	
C6532	QCSB1HK-4R7Y	C CAPACITOR	4.7pF 50V K	
C6533	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
C6534	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
C6601	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C6602	QFZ0212-104Z	M CAPACITOR	0.1uF	
C6603	QFZ0212-104Z	M CAPACITOR	0.1uF	
C6604	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
C6701	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C6702	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
C6703	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C6911	QCBB1HK-221Y	C CAPACITOR	220pF 50V K	
C6912	QTE1V06-106Z	E CAPACITOR	10uF 35V	
C6913	QCBB1HK-101Y	C CAPACITOR	100pF 50V K	
C6921	QCBB1HK-221Y	C CAPACITOR	220pF 50V K	
C6922	QTE1V06-106Z	E CAPACITOR	10uF 35V	
C6923	QCBB1HK-101Y	C CAPACITOR	100pF 50V K	
C6931	QCBB1HK-221Y	C CAPACITOR	220pF 50V K	
C6932	QTE1V06-106Z	E CAPACITOR	10uF 35V	
C6933	QCBB1HK-471Y	C CAPACITOR	470pF 50V K	
R5000	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R5001	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R5002	QRE141J-122Y	C RESISTOR	1.2kΩ 1/4W J	
R5003	QRE141J-182Y	C RESISTOR	1.8kΩ 1/4W J	
R5004	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	
R5005	QRE141J-272Y	C RESISTOR	2.7kΩ 1/4W J	
R5006	QRE141J-392Y	C RESISTOR	3.9kΩ 1/4W J	
R5007	QRE141J-562Y	C RESISTOR	5.6kΩ 1/4W J	
R5008	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R5009	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R5010	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R5011	QRE141J-122Y	C RESISTOR	1.2kΩ 1/4W J	
R5012	QRE141J-182Y	C RESISTOR	1.8kΩ 1/4W J	
R5013	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	
R5014	QRE141J-272Y	C RESISTOR	2.7kΩ 1/4W J	
R5015	QRE141J-392Y	C RESISTOR	3.9kΩ 1/4W J	
R5016	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R5017	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R5018	QRE141J-122Y	C RESISTOR	1.2kΩ 1/4W J	
R5019	QRE141J-182Y	C RESISTOR	1.8kΩ 1/4W J	
R5020	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
R5021	QRE141J-272Y	C RESISTOR	2.7kΩ 1/4W J		R6806	QRE141J-333Y	C RESISTOR	33kΩ 1/4W J	
R5022	QRE141J-392Y	C RESISTOR	3.9kΩ 1/4W J		R6911	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R5023	QRE141J-562Y	C RESISTOR	5.6kΩ 1/4W J		R6912	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J	
R5024	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J		R6921	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R5025	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J		R6922	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J	
R5026	QRE141J-122Y	C RESISTOR	1.2kΩ 1/4W J		R6931	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R5027	QRE141J-182Y	C RESISTOR	1.8kΩ 1/4W J		R6932	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J	
R5028	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J		L6511	QQLZ035-R39	COIL	0.39uH	
R5029	QRE141J-272Y	C RESISTOR	2.7kΩ 1/4W J		L6521	QQLZ035-R39	COIL	0.39uH	
R5030	QRE141J-392Y	C RESISTOR	3.9kΩ 1/4W J		L6531	QQLZ035-R39	COIL	0.39uH	
R5035	QRE141J-161Y	C RESISTOR	160Ω 1/4W J		CN500	QGF1036F2-19	CONNECTOR	FFC/FPC (1-19)	
R5036	QRE141J-161Y	C RESISTOR	160Ω 1/4W J		CN601	QGB2510K2-09	CONNECTOR	B-B (1-9)	
R5037	QRE141J-560Y	C RESISTOR	56Ω 1/4W J		CN602	QGF1205C2-13	CONNECTOR	FFC/FPC (1-13)	
R5038	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J		CN603	QGF1205F2-11	CONNECTOR	FFC/FPC (1-11)	
R5039	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J		CN604	QGA2501F1-03	CONNECTOR	W-B (1-3)	
R5040	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J		CN651	QGB2510K2-13	CONNECTOR	B-B (1-13)	
R5041	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J		CN652	QGF1205C2-08	CONNECTOR	FFC/FPC (1-8)	
R5042	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J		FL500	QLF0150-001	FL TUBE		
R5043	QRE141J-271Y	C RESISTOR	270Ω 1/4W J		FW500	QUM153-18DGZ4-E	FLAT WIRE		
R5044	QRE141J-821Y	C RESISTOR	820Ω 1/4W J		S5000	QSW0683-001Z	PUSH SW I.M		
R5045	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J		S5001	QSW0683-001Z	PUSH SW I.M		
R5046	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J		S5002	QSW0683-001Z	PUSH SW I.M		
R5050	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J		S5003	QSW0683-001Z	PUSH SW I.M		
R6321	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J		S5004	QSW0683-001Z	PUSH SW I.M		
R6342	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J		S5005	QSW0683-001Z	PUSH SW I.M		
R6352	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J		S5006	QSW0683-001Z	PUSH SW I.M		
R6356	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J		S5007	QSW0683-001Z	PUSH SW I.M		
R6357	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J		S5008	QSW0683-001Z	PUSH SW I.M		
R6358	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J		S5009	QSW0683-001Z	PUSH SW I.M		
R6501	QRJ146J-102X	UNF C RESISTOR	1kΩ 1/4W J		S5010	QSW0683-001Z	PUSH SW I.M		
R6502	QRJ146J-102X	UNF C RESISTOR	1kΩ 1/4W J		S5011	QSW0683-001Z	PUSH SW I.M		
R6503	QRJ146J-102X	UNF C RESISTOR	1kΩ 1/4W J		S5012	QSW0683-001Z	PUSH SW I.M		
R6510	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J		S5013	QSW0683-001Z	PUSH SW I.M		
△ R6511	QRZ0224-R22	EMIT RESISTOR	0.22Ω		S5014	QSW0683-001Z	PUSH SW I.M		
R6512	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J		S5015	QSW0683-001Z	PUSH SW I.M		
△ R6513	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J		S5016	QSW0683-001Z	PUSH SW I.M		
R6514	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J		S5017	QSW0683-001Z	PUSH SW I.M		
R6516	QRE141J-562Y	C RESISTOR	5.6kΩ 1/4W J		S5018	QSW0683-001Z	PUSH SW I.M		
R6517	QRE141J-473Y	C RESISTOR	47kΩ 1/4W J		S5019	QSW0683-001Z	PUSH SW I.M		
△ R6518	QRJ146J-681X	UNF C RESISTOR	680Ω 1/4W J		S5020	QSW0683-001Z	PUSH SW I.M		
R6519	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J		S5021	QSW0683-001Z	PUSH SW I.M		
R6520	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J		S5022	QSW0683-001Z	PUSH SW I.M		
△ R6521	QRZ0224-R22	EMIT RESISTOR	0.22Ω		S5023	QSW0683-001Z	PUSH SW I.M		
R6522	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J		S5024	QSW0683-001Z	PUSH SW I.M		
△ R6523	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J		S5025	QSW0683-001Z	PUSH SW I.M		
△ R6524	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J		S5026	QSW0683-001Z	PUSH SW I.M		
R6526	QRE141J-562Y	C RESISTOR	5.6kΩ 1/4W J		S5027	QSW0683-001Z	PUSH SW I.M		
R6527	QRE141J-473Y	C RESISTOR	47kΩ 1/4W J		S5028	QSW0683-001Z	PUSH SW I.M		
△ R6528	QRJ146J-681X	UNF C RESISTOR	680Ω 1/4W J		S5029	QSW0683-001Z	PUSH SW I.M		
R6529	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J		S5030	QSW0683-001Z	PUSH SW I.M		
R6530	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J		S5031	QSW0683-001Z	PUSH SW I.M		
△ R6531	QRZ0224-R22	EMIT RESISTOR	0.22Ω		S5032	QSW0683-001Z	PUSH SW I.M		
R6532	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J		S5033	QSW0683-001Z	PUSH SW I.M		
△ R6533	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J		S5034	QSW0683-001Z	PUSH SW I.M		
R6534	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J		SP500	GV40205-004A	IC HOLDER		
R6536	QRE141J-562Y	C RESISTOR	5.6kΩ 1/4W J						
R6537	QRE141J-473Y	C RESISTOR	47kΩ 1/4W J						
△ R6538	QRJ146J-681X	UNF C RESISTOR	680Ω 1/4W J						
R6539	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J						
R6601	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J						
R6602	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J						
R6603	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J						
R6604	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J						
△ R6605	QRJ146J-150X	UNF C RESISTOR	15Ω 1/4W J						
R6606	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J						
R6607	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J						
△ R6608	QRJ146J-150X	UNF C RESISTOR	15Ω 1/4W J						
R6701	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J						
R6702	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J						
R6703	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J						
R6704	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J						
R6705	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J						
R6706	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J						
R6801	QRE141J-682Y	C RESISTOR	6.8kΩ 1/4W J						
R6802	QRE141J-682Y	C RESISTOR	6.8kΩ 1/4W J						
R6803	QRE141J-682Y	C RESISTOR	6.8kΩ 1/4W J						
R6804	QRE141J-682Y	C RESISTOR	6.8kΩ 1/4W J						
△ R6805	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J						

Primary board (DX-T66)

Block No. [0][9]

△ Symbol No.	Part No.	Part Name	Description	Local
C1002	QETN1HM-226Z	E CAPACITOR	22uF 50V M	
C1003	QETN1HM-226Z	E CAPACITOR	22uF 50V M	
C1004	QCB1HK-103Y	C CAPACITOR	0.01uF 50V K	
C1005	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C1010	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
C1011	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
C1012	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
C1013	QFZ0228-104Z	M CAPACITOR	0.1uF	
C1014	QFZ0228-104Z	M CAPACITOR	0.1uF	
C1015	QFZ0228-104Z	M CAPACITOR	0.1uF	
C1016	QETM2CM-226	E CAPACITOR	22uF 160V M	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
C1017	QETN2AM-107Z	E CAPACITOR	100uF 100V M		△ Q2007	KTA1046/Y/	TRANSISTOR		
C2000	QEZ0706-478	E CAPACITOR	4700uF		Q2008	KTC3199/GL/-T	TRANSISTOR		
C2004	QEZ0706-478	E CAPACITOR	4700uF		Q2009	KTC3199/GL/-T	TRANSISTOR		
C2006	QEZ0840-228	E CAPACITOR	2200uF		Q9300	KRA110M-T	TRANSISTOR		
C2008	QEZ0840-228	E CAPACITOR	2200uF		Q9301	KRC110M-T	TRANSISTOR		
C2009	QFZ0228-104Z	M CAPACITOR	0.1uF		Q9303	KTC3199/GL/-T	TRANSISTOR		
C2010	QCB11HK-103Y	C CAPACITOR	0.01uF 50V K		△ R1000	QRK126J-470X	UNF C RESISTOR	47Ω 1/2W J	
C2011	QCB11HK-221Y	C CAPACITOR	220pF 50V K		R1001	QRE141J-753Y	C RESISTOR	75kΩ 1/4W J	
C2012	QETM1CM-478	E CAPACITOR	4700uF 16V M		R1002	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
C2013	QETM1EM-478	E CAPACITOR	4700uF 25V M		R1003	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
C9200	QETN1AM-477Z	E CAPACITOR	470uF 10V M		R1004	QRK126J-1R0X	UNF C RESISTOR	1Ω 1/2W J	
C9204	QCB11HK-103Y	C CAPACITOR	0.01uF 50V K		R1005	QRE141J-753Y	C RESISTOR	75kΩ 1/4W J	
C9206	QETN1HM-105Z	E CAPACITOR	1uF 50V M		R1006	QRK126J-1R0X	UNF C RESISTOR	1Ω 1/2W J	
C9209	QETN1HM-226Z	E CAPACITOR	22uF 50V M		R2000	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
C9211	QETN1HM-105Z	E CAPACITOR	1uF 50V M		R2001	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
C9213	QETN1HM-105Z	E CAPACITOR	1uF 50V M		R2002	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
C9215	QETN1HM-105Z	E CAPACITOR	1uF 50V M		R2003	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
C9216	QCB11HK-104Y	C CAPACITOR	0.1uF 50V K		R2004	QRE141J-681Y	C RESISTOR	680Ω 1/4W J	
C9218	QETN0JM-477Z	E CAPACITOR	470uF 6.3V M		R2005	QRE141J-272Y	C RESISTOR	2.7kΩ 1/4W J	
C9221	QETN0JM-477Z	E CAPACITOR	470uF 6.3V M		R2006	QRE141J-681Y	C RESISTOR	680Ω 1/4W J	
C9224	QETN0JM-477Z	E CAPACITOR	470uF 6.3V M		R2007	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	
C9227	QETN0JM-477Z	E CAPACITOR	470uF 6.3V M		R2008	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
C9230	QETN0JM-477Z	E CAPACITOR	470uF 6.3V M		R2009	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
C9232	QCB11HK-103Y	C CAPACITOR	0.01uF 50V K		R2010	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
C9300	QETN1CM-107Z	E CAPACITOR	100uF 16V M		R2011	QRL01DJ-471X	OMF RESISTOR	470Ω 1W J	
C9303	QETN1CM-107Z	E CAPACITOR	100uF 16V M		R2012	QRL01DJ-471X	OMF RESISTOR	470Ω 1W J	
CN100	QGA7901C1-02	CONNECTOR	W-B (1-2)		R2013	QRE141J-273Y	C RESISTOR	27kΩ 1/4W J	
CN101	QGA7901C1-04	CONNECTOR	W-B (1-4)		R9201	QRE141J-431Y	C RESISTOR	430Ω 1/4W J	
CN102	QGA7901C1-03	CONNECTOR	W-B (1-3)		R9202	QRE141J-391Y	C RESISTOR	390Ω 1/4W J	
CN103	QGA3901F1-08	CONNECTOR	W-B (1-8)		R9203	QRE141J-391Y	C RESISTOR	390Ω 1/4W J	
CN104	QGB2510J1-13	CONNECTOR	B-B (1-13)		R9204	QRE141J-131Y	C RESISTOR	130Ω 1/4W J	
CN105	QGD2503F1-03	CONNECTOR	(1-3)		R9205	QRE141J-391Y	C RESISTOR	390Ω 1/4W J	
CN106	QGA3901F2-03	CONNECTOR	W-B (1-3)		R9206	QRE141J-131Y	C RESISTOR	130Ω 1/4W J	
CN200	QGB2510J1-13	CONNECTOR	B-B (1-13)		R9207	QRE141J-391Y	C RESISTOR	390Ω 1/4W J	
CN201	QGB2510J1-09	CONNECTOR	B-B (1-9)		R9208	QRE141J-431Y	C RESISTOR	430Ω 1/4W J	
CN202	QGD2504C1-03Z	CONNECTOR	(1-3)		R9209	QRE141J-391Y	C RESISTOR	390Ω 1/4W J	
CN203	QGB2510K2-07	CONNECTOR	B-B (1-7)		R9210	QRE141J-431Y	C RESISTOR	430Ω 1/4W J	
CN204	QGB2510K2-13	CONNECTOR	B-B (1-13)		R9218	QRE141J-750Y	C RESISTOR	75Ω 1/4W J	
CN920	QGF1205C2-08	CONNECTOR	FFC/FPC (1-8)		R9221	QRE141J-750Y	C RESISTOR	75Ω 1/4W J	
CN930	QGF1036C2-28	CONNECTOR	FFC/FPC (1-28)		R9224	QRE141J-750Y	C RESISTOR	75Ω 1/4W J	
CN931	QGF1205C2-11	CONNECTOR	FFC/FPC (1-11)		R9227	QRE141J-750Y	C RESISTOR	75Ω 1/4W J	
△ D1000	1N5402M-20	SI DIODE			R9230	QRE141J-750Y	C RESISTOR	75Ω 1/4W J	
D1001	1N5402M-20	SI DIODE			R9232	QRE141J-750Y	C RESISTOR	75Ω 1/4W J	
△ D1002	1N5402M-20	SI DIODE			R9300	QRT01DJ-2R2X	MF RESISTOR	2.2Ω 1W J	
△ D1003	1N5402M-20	SI DIODE			R9301	QRE141J-681Y	C RESISTOR	680Ω 1/4W J	
△ D1006	6A10E2	SI DIODE			R9302	QRZ9006-4R7X	FUSI RESISTOR	4.7Ω	
△ D1007	6A10E2	SI DIODE			R9303	QRE141J-271Y	C RESISTOR	270Ω 1/4W J	
△ D1010	6A10E2	SI DIODE			R9310	QRE141J-470Y	C RESISTOR	47Ω 1/4W J	
△ D1011	6A10E2	SI DIODE			△ S1000	QSW0812-001	VOLTAGE SWITCH		
D1012	MTZJ6.2B-T2	Z DIODE			Z1001	QNG0003-001Z	FUSE CLIP		
D1013	MTZJ18B-T2	Z DIODE			Z1002	QNG0003-001Z	FUSE CLIP		
D1014	MTZJ18B-T2	Z DIODE			Z1003	QNG0003-001Z	FUSE CLIP		
D1015	1N4003S-T5	SI DIODE			Z1004	QNG0003-001Z	FUSE CLIP		
D1016	1N4003S-T5	SI DIODE			Z1005	QNG0003-001Z	FUSE CLIP		
D1017	1N4003S-T5	SI DIODE			Z1006	QNG0003-001Z	FUSE CLIP		
△ D2001	GBU803	BRIDGE DIODE			Z1007	QNG0003-001Z	FUSE CLIP		
D2008	2A02-M	DIODE			Z1008	QNG0003-001Z	FUSE CLIP		
D2009	MTZJ5.1C-T2	Z DIODE			Z1009	QNG0003-001Z	FUSE CLIP		
D2013	1SS133-T2	SI DIODE			Z1010	QNG0003-001Z	FUSE CLIP		
D9300	2A02-M	DIODE			Z1011	QNG0003-001Z	FUSE CLIP		
D9301	MTZJ3.3B-T2	Z DIODE			Z1012	QNG0003-001Z	FUSE CLIP		
D9302	MTZJ2.0A-T2	Z DIODE			Z1013	QNG0003-001Z	FUSE CLIP		
D9303	MTZJ3.9B-T2	Z DIODE			Z1014	QNG0003-001Z	FUSE CLIP		
D9310	MTZJ3.0B-T2	Z DIODE			Z1015	QNG0003-001Z	FUSE CLIP		
D9311	1SS133-T2	SI DIODE			Z1016	QNG0003-001Z	FUSE CLIP		
D9312	1SS133-T2	SI DIODE							
D9313	1SS133-T2	SI DIODE							
H2001	GV40577-001A	HEAT SINK							
HS202	GV40620-003A	HEAT SINK							
IC920	BH7868FS-X	IC							
IC930	GP1FAV30TK0F	OPT TRANSMITTER							
IH920	GV40397-004A	IC HOLDER							
J920	QNN0572-001	PIN JACK							
J921	QNN0557-002	PIN JACK							
PP201	QZW0112-001	WIRE CLAMP							
PP202	QZW0112-001	WIRE CLAMP							
△ Q1000	KTC2026/Y/	TRANSISTOR							
Q1001	KTC3203/OY/-T	TRANSISTOR							

DVD servo board(FMU-SB4-1M)

(DX-T99,DX-T77)

Block No. [1][0]

△ Symbol No.	Part No.	Part Name	Description	Local
IC201	LA6502-X	IC		
IC301	MN2DS0009AA	IC		
IC302	MM1701CH-X	IC		
IC305	MM1563BF-X	IC	3.1V Regulator	
IC451	MN101C61GNW	IC		
IC452	BR93L56RF-W-X	IC		
IC453	S-80827CNNB-G-W	IC		
IC505	K4S641632H-UC75	IC		
IC505	or K4S641632K-UC75	IC		
IC509	-----	IC(MICRO C ROM)		
IC510	BR24L16F-W-X	IC(DIGITAL)		
IC701	AK4387ET-X	IC		
IC702	AK4387ET-X	IC		
IC703	AK4387ET-X	IC		
IC704	AK5358ET-X	IC		
IC705	MM1615AN-X	IC		
Q101	KTA1001/Y/-X	TRANSISTOR		
Q101	or 2SB1424/R/-W	TRANSISTOR		
Q102	2SC4617/R/-X	TRANSISTOR		
Q103	KTA1001/Y/-X	TRANSISTOR		
Q103	or 2SB1424/R/-W	TRANSISTOR		
Q104	2SC4617/R/-X	TRANSISTOR		
C101	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C102	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C103	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C104	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C105	NEAF0JM-476X	E CAPACITOR	47uF 6.3V M	
C106	NBE20JM-226X	TA E CAPACITOR	22uF 6.3V M	
C107	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C108	NBE20JM-226X	TA E CAPACITOR	22uF 6.3V M	
C201	NDC31HJ-221X	C CAPACITOR	220pF 50V J	
C202	NDC31HJ-221X	C CAPACITOR	220pF 50V J	
C203	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C204	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C205	NCB31HK-271X	C CAPACITOR	270pF 50V K	
C206	NDC31HJ-151X	C CAPACITOR	150pF 50V J	
C210	NCF31AZ-105X	C CAPACITOR	1uF 10V Z	
C211	NCB31EK-223X	C CAPACITOR	0.022uF 25V K	
C217	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C251	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C256	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C257	NCB31HK-822X	C CAPACITOR	8200pF 50V K	
C258	NCB31CK-153X	C CAPACITOR	0.015uF 16V K	
C259	NCB31CK-153X	C CAPACITOR	0.015uF 16V K	
C260	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	
C261	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	
C262	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	
C263	NEAF1CM-107X	E CAPACITOR	100uF 16V M	
C300	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C301	NEAF0GM-476X	E CAPACITOR	47uF 4V M	
C302	NEAF0GM-476X	E CAPACITOR	47uF 4V M	
C303	NEAF0GM-476X	E CAPACITOR	47uF 4V M	
C304	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
C305	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C306	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C307	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C308	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C309	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C310	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C312	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C313	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C314	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C315	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C316	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C318	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C319	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C320	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C321	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C322	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C323	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	

△ Symbol No.	Part No.	Part Name	Description	Local
C324	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
C325	NDC31HJ-120X	C CAPACITOR	12pF 50V J	
C326	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C328	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C329	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C330	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C331	NCB31CK-333X	C CAPACITOR	0.033uF 16V K	
C332	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C333	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C334	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C335	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C337	NCB31CK-183X	C CAPACITOR	0.018uF 16V K	
C338	NCB31HK-562X	C CAPACITOR	5600pF 50V K	
C339	NBE20JM-106X	TA E CAPACITOR	10uF 6.3V M	
C340	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
C341	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
C347	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C348	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C349	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C350	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C351	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C352	NCB31CK-153X	C CAPACITOR	0.015uF 16V K	
C353	NCB31HK-561X	C CAPACITOR	560pF 50V K	
C354	NCB31HK-561X	C CAPACITOR	560pF 50V K	
C356	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
C359	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
C371	NCF31AZ-105X	C CAPACITOR	1uF 10V Z	
C372	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C375	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C376	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C377	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C379	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C380	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C381	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C382	NCB31HK-471X	C CAPACITOR	470pF 50V K	
C383	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C386	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C393	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C451	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C452	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C453	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C454	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C455	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C551	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C554	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C555	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C556	NCF31AZ-105X	C CAPACITOR	1uF 10V Z	
C557	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C558	NEAF0GM-476X	E CAPACITOR	47uF 4V M	
C559	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C560	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C563	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C564	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C701	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C702	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C703	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
C704	NCF31AZ-105X	C CAPACITOR	1uF 10V Z	
C705	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C706	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C707	NEAF1CM-106X	E CAPACITOR	10uF 16V M	
C708	NEAF1CM-106X	E CAPACITOR	10uF 16V M	
C709	NEAF0JM-476X	E CAPACITOR	47uF 6.3V M	
C712	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C713	NEAF1CM-106X	E CAPACITOR	10uF 16V M	
C714	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C715	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C716	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C717	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C718	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C722	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
R101	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R102	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R103	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R104	NRSA63J-432X	MG RESISTOR	4.3kΩ 1/16W J	
R105	NRS181J-180X	MG RESISTOR	18Ω 1/8W J	
R106	NRSA63J-2R2X	MG RESISTOR	2.2Ω 1/16W J	
R107	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	

△ Symbol No.	Part No.	Part Name	Description	Local
R108	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R109	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R111	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R112	NRSA63J-432X	MG RESISTOR	4.3kΩ 1/16W J	
R113	NRS181J-180X	MG RESISTOR	18Ω 1/8W J	
R114	NRSA63J-2R2X	MG RESISTOR	2.2Ω 1/16W J	
R115	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R116	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R117	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R125	NRSA63J-1R0X	MG RESISTOR	1Ω 1/16W J	
R127	NRSA63J-432X	MG RESISTOR	4.3kΩ 1/16W J	
R128	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R202	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R204	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	
R205	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	
R206	NRSA63J-303X	MG RESISTOR	30kΩ 1/16W J	
R207	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R213	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R214	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R219	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J	
R220	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J	
R221	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R251	NRS125J-R39X	MG RESISTOR	0.39Ω 1/2W J	
R259	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R301	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	
R303	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R306	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R307	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R308	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R309	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R310	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R316	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R319	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R324	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R325	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R326	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R327	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R330	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R331	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R332	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R334	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R335	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R336	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R337	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R338	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R339	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R340	NRSA63D-303X	MG RESISTOR	30kΩ 1/16W D	
R341	NRSA63D-512X	MG RESISTOR	5.1kΩ 1/16W D	
R342	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	
R345	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R346	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R347	NRSA63J-203X	MG RESISTOR	20kΩ 1/16W J	
R348	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R350	NRSA63J-751X	MG RESISTOR	750Ω 1/16W J	
R351	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J	
R352	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	
R353	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R357	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R358	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R359	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R360	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R362	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R367	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R372	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R373	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R375	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R376	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R377	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R378	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R383	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R384	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R385	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R392	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R452	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R453	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R454	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R455	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R456	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	

△ Symbol No.	Part No.	Part Name	Description	Local
R457	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R458	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R461	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R463	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R464	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R465	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R535	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R541	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R542	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R701	NRSA63J-2R2X	MG RESISTOR	2.2Ω 1/16W J	
R703	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R704	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R705	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R706	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R707	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R708	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R714	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R715	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R716	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R717	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R719	NRSA63J-5R1X	MG RESISTOR	5.1Ω 1/16W J	
R720	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R722	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R731	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R732	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
CN101	QGF0523F3-24W	CONNECTOR	FFC/FPC (1-24)	
CN201	QGF1016F8-08W	CONNECTOR	FFC/FPC (1-8)	
CN451	QGF1016F8-15W	CONNECTOR	FFC/FPC (1-15)	
CN452	QGA2001F6-02X	CONNECTOR	W-B (1-2)	
CN453	QGA2001F6-03X	CONNECTOR	W-B (1-3)	
CN701	QGF1016F8-28W	CONNECTOR	FFC/FPC (1-28)	
CN702	QGF1016F8-10W	CONNECTOR	FFC/FPC (1-10)	
CN703	QGF1016F8-08W	CONNECTOR	FFC/FPC (1-8)	
K101	NQR0502-001X	FERRITE BEADS		
K351	NQR0502-001X	FERRITE BEADS		
K352	NQR0502-001X	FERRITE BEADS		
K454	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
K455	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
K456	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
K501	NQR0502-001X	FERRITE BEADS		
K710	NQR0022-002X	FERRITE BEADS		
K732	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
K733	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
K734	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
K735	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
K736	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
K737	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
K738	NQR0022-005X	FERRITE BEADS		
K741	NQR0022-002X	FERRITE BEADS		
K744	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
K748	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
K749	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
K750	NQR0022-002X	FERRITE BEADS		
K752	NQR0022-002X	FERRITE BEADS		
K754	NQR0022-002X	FERRITE BEADS		
K756	NQR0022-002X	FERRITE BEADS		
K758	NQR0022-002X	FERRITE BEADS		
TH301	NAD0025-103X	N THERMISTOR	10kΩ	
X301	NAX0741-001X	CRYSTAL	27.000MHz	
X451	NAX0248-001X	C OSCILLATOR	8.000MHz	

DVD loading board(FMU-SB4-1M)

(DX-T99,DX-T77)

Block No. [1][1]

△ Symbol No.	Part No.	Part Name	Description	Local
IC1	LB1641	IC		
IC2	LB1641	IC		
D1	MTZJ6.2A-T2	Z DIODE		

△ Symbol No.	Part No.	Part Name	Description	Local
C1	QEK1AM-107Z	E CAPACITOR	100uF 10V M	
C2	QCFB1HZ-104Y	C CAPACITOR	0.1uF 50V Z	
C3	QFLC1HJ-103Z	M CAPACITOR	0.01uF 50V J	
C5	QFLC1HJ-103Z	M CAPACITOR	0.01uF 50V J	
C6	QCFB1HZ-104Y	C CAPACITOR	0.1uF 50V Z	
C7	QCFB1HZ-104Y	C CAPACITOR	0.1uF 50V Z	
CN1	QGF1036F1-15	CONNECTOR	FFC/FPC (1-15)	
CN2	QGB2024K1-07S	CONNECTOR	B-B (1-7)	
CN3	QGB2024J1-07S	CONNECTOR	B-B (1-7)	
SW1	QSW0844-001	PUSH SWITCH		
SW2	QSW0844-001	PUSH SWITCH		
SW3	QSW0844-001	PUSH SWITCH		
SW4	QSW0844-001	PUSH SWITCH		
SW5	QSW0844-001	PUSH SWITCH		
SW6	QSW0854-002	PUSH SW		
SW8	QSW0923-001	DETECT SWITCH		

DVD servo board(FMU-SB4-11M)

(DX-T66)

Block No. [1][2]

△ Symbol No.	Part No.	Part Name	Description	Local
IC201	LA6502-X	IC		
IC301	MN2DS0009AA	IC		
IC302	MM1701CH-X	IC		
IC305	MM1563BF-X	IC	3.1V Regulator	
IC451	MN101C61GNW	IC		
IC452	BR93L56RF-W-X	IC		
IC453	S-80827CNNB-G-W	IC		
IC505	K4S641632H-UC75	IC		
IC505	or K4S641632K-UC75	IC		
IC509	SG32M90TFIR3	IC(MICRO C ROM)		
IC509	or SG32A90TFIR3	IC(MICRO C ROM)		
IC510	BR24L16F-W-X	IC(DIGITAL)		
IC701	AK4387ET-X	IC		
IC705	MM1615AN-X	IC		
Q101	KTA1001/Y/-X	TRANSISTOR		
Q101	or 2SB1424/R/-W	TRANSISTOR		
Q102	2SC4617/R/-X	TRANSISTOR		
Q103	KTA1001/Y/-X	TRANSISTOR		
Q103	or 2SB1424/R/-W	TRANSISTOR		
Q104	2SC4617/R/-X	TRANSISTOR		
C101	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C102	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C103	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C104	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C105	NEAF0JM-476X	E CAPACITOR	47uF 6.3V M	
C106	NBE20JM-226X	TA E CAPACITOR	22uF 6.3V M	
C107	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C108	NBE20JM-226X	TA E CAPACITOR	22uF 6.3V M	
C201	NDC31HJ-221X	C CAPACITOR	220pF 50V J	
C202	NDC31HJ-221X	C CAPACITOR	220pF 50V J	
C203	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C204	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C205	NCB31HK-271X	C CAPACITOR	270pF 50V K	
C206	NDC31HJ-151X	C CAPACITOR	150pF 50V J	
C210	NCF31AZ-105X	C CAPACITOR	1uF 10V Z	
C211	NCB31EK-223X	C CAPACITOR	0.022uF 25V K	
C217	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C251	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C256	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C257	NCB31HK-822X	C CAPACITOR	8200pF 50V K	
C258	NCB31CK-153X	C CAPACITOR	0.015uF 16V K	
C259	NCB31CK-153X	C CAPACITOR	0.015uF 16V K	
C260	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	
C261	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	
C262	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	
C263	NEAF1CM-107X	E CAPACITOR	100uF 16V M	
C300	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	

△ Symbol No.	Part No.	Part Name	Description	Local
C301	NEAF0GM-476X	E CAPACITOR	47uF 4V M	
C302	NEAF0GM-476X	E CAPACITOR	47uF 4V M	
C303	NEAF0GM-476X	E CAPACITOR	47uF 4V M	
C304	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
C305	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C306	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C307	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C308	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C309	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C310	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C312	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C313	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C314	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C315	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C316	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C318	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C319	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C320	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C321	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C322	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C323	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C324	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
C325	NDC31HJ-120X	C CAPACITOR	12pF 50V J	
C326	NDC31HJ-100X	C CAPACITOR	10pF 50V J	
C328	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C329	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C330	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C331	NCB31CK-333X	C CAPACITOR	0.033uF 16V K	
C332	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C333	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C334	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C335	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C337	NCB31CK-183X	C CAPACITOR	0.018uF 16V K	
C338	NCB31HK-562X	C CAPACITOR	5600pF 50V K	
C339	NBE20JM-106X	TA E CAPACITOR	10uF 6.3V M	
C340	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
C341	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
C347	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C348	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C349	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C350	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C351	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C352	NCB31CK-153X	C CAPACITOR	0.015uF 16V K	
C353	NCB31HK-561X	C CAPACITOR	560pF 50V K	
C354	NCB31HK-561X	C CAPACITOR	560pF 50V K	
C356	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
C359	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
C371	NCF31AZ-105X	C CAPACITOR	1uF 10V Z	
C372	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C375	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C376	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C377	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C379	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C380	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C381	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	
C382	NCB31HK-471X	C CAPACITOR	470pF 50V K	
C383	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C386	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C393	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C451	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C452	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C453	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C454	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C455	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C551	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C554	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C555	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C556	NCF31AZ-105X	C CAPACITOR	1uF 10V Z	
C557	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C558	NEAF0GM-476X	E CAPACITOR	47uF 4V M	
C559	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C560	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C563	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C564	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C701	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C702	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
C703	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
C709	NEAF0JM-476X	E CAPACITOR	47uF 6.3V M	

△ Symbol No.	Part No.	Part Name	Description	Local
C712	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C713	NEAF1CM-106X	E CAPACITOR	10uF 16V M	
C714	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
C722	NCF31EZ-104X	C CAPACITOR	0.1uF 25V Z	
R101	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R102	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R103	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R104	NRSA63J-432X	MG RESISTOR	4.3kΩ 1/16W J	
R105	NRS181J-180X	MG RESISTOR	18Ω 1/8W J	
R106	NRSA63J-2R2X	MG RESISTOR	2.2Ω 1/16W J	
R107	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R108	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R109	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R111	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R112	NRSA63J-432X	MG RESISTOR	4.3kΩ 1/16W J	
R113	NRS181J-180X	MG RESISTOR	18Ω 1/8W J	
R114	NRSA63J-2R2X	MG RESISTOR	2.2Ω 1/16W J	
R115	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R116	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R117	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R125	NRSA63J-1R0X	MG RESISTOR	1Ω 1/16W J	
R127	NRSA63J-432X	MG RESISTOR	4.3kΩ 1/16W J	
R128	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R202	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R204	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	
R205	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	
R206	NRSA63J-303X	MG RESISTOR	30kΩ 1/16W J	
R207	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R213	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R214	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R219	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J	
R220	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J	
R221	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R251	NRS125J-R39X	MG RESISTOR	0.39Ω 1/2W J	
R259	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R301	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	
R303	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R306	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R307	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R308	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R309	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R310	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R316	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R319	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R324	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R325	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R326	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R327	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R334	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R335	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R336	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R337	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R338	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R339	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R340	NRSA63D-303X	MG RESISTOR	30kΩ 1/16W D	
R341	NRSA63D-512X	MG RESISTOR	5.1kΩ 1/16W D	
R342	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	
R345	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R346	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R347	NRSA63J-203X	MG RESISTOR	20kΩ 1/16W J	
R348	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R350	NRSA63J-751X	MG RESISTOR	750Ω 1/16W J	
R351	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J	
R352	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	
R353	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R357	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R358	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R362	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R367	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R372	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R373	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R375	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R376	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R377	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R378	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R383	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R384	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	

△ Symbol No.	Part No.	Part Name	Description	Local
R385	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R392	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R452	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R453	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R454	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R455	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R456	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R457	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R458	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R461	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R463	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R464	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R465	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R535	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R541	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R542	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R701	NRSA63J-2R2X	MG RESISTOR	2.2Ω 1/16W J	
R703	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R704	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R717	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R731	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R732	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	

CN101	QGF0523F3-24W	CONNECTOR	FFC/FPC (1-24)
CN201	QGF1016F8-08W	CONNECTOR	FFC/FPC (1-8)
CN451	QGF1016F8-15W	CONNECTOR	FFC/FPC (1-15)
CN452	QGA2001F6-02X	CONNECTOR	W-B (1-2)
CN453	QGA2001F6-03X	CONNECTOR	W-B (1-3)
CN701	QGF1016F8-28W	CONNECTOR	FFC/FPC (1-28)
CN702	QGF1016F8-10W	CONNECTOR	FFC/FPC (1-10)
K101	NQR0502-001X	FERRITE BEADS	
K351	NQR0502-001X	FERRITE BEADS	
K352	NQR0502-001X	FERRITE BEADS	
K454	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
K455	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
K456	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
K501	NQR0502-001X	FERRITE BEADS	
K710	NQR0022-002X	FERRITE BEADS	
K732	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
K733	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
K734	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
K735	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
K736	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
K737	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
K738	NQR0022-005X	FERRITE BEADS	
K744	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
K748	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
K749	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
K750	NQR0022-002X	FERRITE BEADS	
K752	NQR0022-002X	FERRITE BEADS	
K754	NQR0022-002X	FERRITE BEADS	
K756	NQR0022-002X	FERRITE BEADS	
K758	NQR0022-002X	FERRITE BEADS	
TH301	NAD0025-103X	N THERMISTOR	10kΩ
X301	NAX0741-001X	CRYSTAL	27.000MHz
X451	NAX0248-001X	C OSCILLATOR	8.000MHz

DVD loading board(FMU-SB4-11M)

(DX-T66)

Block No. [1][3]

△ Symbol No.	Part No.	Part Name	Description	Local
IC1	LB1641	IC		
IC2	LB1641	IC		
D1	MTZJ6.2A-T2	Z DIODE		
C1	QKCC1CM-107Z	E CAPACITOR	100uF 16V M	
C2	QCB1HK-104Y	C CAPACITOR	0.1uF 50V K	
C3	QFLC1HJ-103Z	M CAPACITOR	0.01uF 50V J	
C5	QFLC1HJ-103Z	M CAPACITOR	0.01uF 50V J	
C6	QCB1HK-104Y	C CAPACITOR	0.1uF 50V K	

△ Symbol No.	Part No.	Part Name	Description	Local
C7	QCBB1HK-104Y	C CAPACITOR	0.1uF 50V K	
CN1	QGF1036F2-15	CONNECTOR	FFC/FPC (1-15)	
CN2	QGB2024K1-07S	CONNECTOR	B-B (1-7)	
CN3	QGB2024J1-07S	CONNECTOR	B-B (1-7)	
SW1	QSW0844-002	PUSH SWITCH		
SW2	QSW0844-002	PUSH SWITCH		
SW3	QSW0844-002	PUSH SWITCH		
SW4	QSW0844-002	PUSH SWITCH		
SW5	QSW0844-002	PUSH SWITCH		
SW6	QSW0854-002	PUSH SW		
SW8	QSW0923-001	DETECT SWITCH		

Head amplifier & Cassette switch board (SLC-S401M)-CassetteA (Common)

Block No. [1][4]

△ Symbol No.	Part No.	Part Name	Description	Local
IC1	SG-105F3/Z1/	PHOTO SENSER		
IC41	NJM4565D	IC		
IC43	CD4094BE	IC		
Q460	2SC3576-JVC-T	TRANSISTOR		
Q461	2SC3576-JVC-T	TRANSISTOR		
Q481	KTA1271/OY/-T	TRANSISTOR		
Q482	KRC107M-T	DIGI TRANSISTOR		
Q485	2SB562/C/-T	TRANSISTOR		
Q486	KTC3199/GL/-T	TRANSISTOR		
D1	1SR139-400-T2	SI DIODE		
D482	1SS133-T2	SI DIODE		
D483	1SS133-T2	SI DIODE		
D485	MTZJ5.1B-T2	Z DIODE		
C449	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	
C450	QDGB1HK-821Y	C CAPACITOR	820pF 50V K	
C451	QDGB1HK-821Y	C CAPACITOR	820pF 50V K	
C452	QCBB1HK-101Y	C CAPACITOR	100pF 50V K	
C453	QCBB1HK-101Y	C CAPACITOR	100pF 50V K	
C458	QEKJ1AM-107Z	E CAPACITOR	100uF 10V M	
C459	QCBB1HK-391Y	C CAPACITOR	390pF 50V K	
C460	QCBB1HK-103Y	C CAPACITOR	0.01uF 50V K	
C461	QCBB1HK-103Y	C CAPACITOR	0.01uF 50V K	
C462	QEKJ1AM-107Z	E CAPACITOR	100uF 10V M	
C463	QEKJ1HM-225Z	E CAPACITOR	2.2uF 50V M	
C465	QEKJ1AM-107Z	E CAPACITOR	100uF 10V M	
C466	QCBB1HK-391Y	C CAPACITOR	390pF 50V K	
C467	QEKJ1HM-225Z	E CAPACITOR	2.2uF 50V M	
C468	QEKJ1HM-225Z	E CAPACITOR	2.2uF 50V M	
C469	QEKJ1HM-225Z	E CAPACITOR	2.2uF 50V M	
C480	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	
C481	QEKJ1AM-107Z	E CAPACITOR	100uF 10V M	
C484	QEKJ1EM-475Z	E CAPACITOR	4.7uF 25V M	
C486	QCBB1HK-103Y	C CAPACITOR	0.01uF 50V K	
R371	QRE141J-123Y	C RESISTOR	12kΩ 1/4W J	
R449	QRE141J-221Y	C RESISTOR	220Ω 1/4W J	
R452	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J	
R453	QRE141J-101Y	C RESISTOR	100Ω 1/4W J	
R454	QRE141J-101Y	C RESISTOR	100Ω 1/4W J	
R456	QRE141J-133Y	C RESISTOR	13kΩ 1/4W J	
R457	QRE141J-133Y	C RESISTOR	13kΩ 1/4W J	
R458	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	
R459	QRE141J-473Y	C RESISTOR	47kΩ 1/4W J	
R460	QRE141J-334Y	C RESISTOR	330kΩ 1/4W J	
R461	QRE141J-334Y	C RESISTOR	330kΩ 1/4W J	
R462	QRE141J-101Y	C RESISTOR	100Ω 1/4W J	
R463	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J	
R465	QRE141J-101Y	C RESISTOR	100Ω 1/4W J	
R466	QRE141J-473Y	C RESISTOR	47kΩ 1/4W J	
R467	QRE141J-473Y	C RESISTOR	47kΩ 1/4W J	
R468	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	

△ Symbol No.	Part No.	Part Name	Description	Local
R469	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	
R470	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	
R471	QRE141J-473Y	C RESISTOR	47kΩ 1/4W J	
R480	QRE141J-123Y	C RESISTOR	12kΩ 1/4W J	
R481	QRE141J-183Y	C RESISTOR	18kΩ 1/4W J	
R482	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R483	QRE141J-681Y	C RESISTOR	680Ω 1/4W J	
R485	QRE141J-151Y	C RESISTOR	150Ω 1/4W J	
R486	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	
R487	QRE141J-332Y	C RESISTOR	3.3kΩ 1/4W J	
R488	QRE141J-332Y	C RESISTOR	3.3kΩ 1/4W J	
R489	QRE141J-243Y	C RESISTOR	24kΩ 1/4W J	
VR37	QVP0077-103Z	TRIM RESISTOR	10kΩ	
CN1	QGF1205F1-09	CONNECTOR	FFC/FPC (1-9)	
CN41	QGF1205F1-09	CONNECTOR	FFC/FPC (1-9)	
CN45	QGF1205F1-25	CONNECTOR	FFC/FPC (1-25)	
CN46	QGF1210G1-09	CONNECTOR	FFC/FPC (1-9)	
CN47	QGF1210G1-10	CONNECTOR	FFC/FPC (1-10)	
CN48	QGF1205F1-06	CONNECTOR	FFC/FPC (1-6)	
FW100	QUM024-07A2Z3	PARA RIBON WIRE		
P1	QNZ0104-001	POST PIN		
SW2	QSW0832-001	CASS.SWITCH		
SW6	QSW0859-001	DETECT SWITCH		

Head amplifier & Cassette switch board (SLC-S304M)-CassetteB (Common)

Block No. [1][5]

△ Symbol No.	Part No.	Part Name	Description	Local
IC1	GP2S24CJ000F	PHOTO SENSOR		
IC32	HA12238F	IC		
IC33	CD4094BE	IC		
Q302	2SC2001/K/-T	TRANSISTOR		
Q305	2SC2001/K/-T	TRANSISTOR		
Q342	KRA111M-T	DIGI TRANSISTOR		
Q343	2SC3576-JVC-T	TRANSISTOR		
Q344	2SC3576-JVC-T	TRANSISTOR		
Q345	2SC3576-JVC-T	TRANSISTOR		
Q346	2SC3576-JVC-T	TRANSISTOR		
Q347	KRC107M-T	DIGI TRANSISTOR		
Q348	KRC113M-T	TRANSISTOR		
Q371	KTA1271/OY/-T	TRANSISTOR		
Q372	KRC107M-T	DIGI TRANSISTOR		
Q375	2SB562/C/-T	TRANSISTOR		
Q376	KTC3199/GL/-T	TRANSISTOR		
D1	1SR139-400-T2	SI DIODE		
D375	MTZJ5.1B-T2	Z DIODE		
C101	QDGB1HK-821Y	C CAPACITOR	820pF 50V K	
C102	QDYB1CM-103Y	C CAPACITOR	0.01uF 16V M	
C103	QFLA1HJ-104Z	M CAPACITOR	0.1uF 50V J	
C105	QCBB1HK-391Y	C CAPACITOR	390pF 50V K	
C106	QERF1HM-225Z	E CAPACITOR	2.2uF 50V M	
C109	QEKJ1EM-475Z	E CAPACITOR	4.7uF 25V M	
C110	QDXB1CM-682Y	C CAPACITOR	6800pF 16V M	
C113	QFLA1HJ-104Z	M CAPACITOR	0.1uF 50V J	
C120	QCSB1HK-4R7Y	C CAPACITOR	4.7pF 50V K	
C121	QCBB1HK-331Y	C CAPACITOR	330pF 50V K	
C201	QDGB1HK-821Y	C CAPACITOR	820pF 50V K	
C202	QDYB1CM-103Y	C CAPACITOR	0.01uF 16V M	
C203	QFLA1HJ-104Z	M CAPACITOR	0.1uF 50V J	
C205	QCBB1HK-391Y	C CAPACITOR	390pF 50V K	
C206	QERF1HM-225Z	E CAPACITOR	2.2uF 50V M	
C207	QCBB1HK-271Y	C CAPACITOR	270pF 50V K	
C208	QDYB1CM-103Y	C CAPACITOR	0.01uF 16V M	
C209	QEKJ1EM-475Z	E CAPACITOR	4.7uF 25V M	
C210	QDXB1CM-682Y	C CAPACITOR	6800pF 16V M	
C211	QCBB1HK-151Y	C CAPACITOR	150pF 50V K	
C212	QCBB1HK-271Y	C CAPACITOR	270pF 50V K	

△ Symbol No.	Part No.	Part Name	Description	Local
C213	QFLA1HJ-104Z	M CAPACITOR	0.1uF 50V J	
C214	QCB1HK-151Y	C CAPACITOR	150pF 50V K	
C220	QCSB1HK-4R7Y	C CAPACITOR	4.7pF 50V K	
C221	QCB1HK-331Y	C CAPACITOR	330pF 50V K	
C300	QEKJ1HM-105Z	E CAPACITOR	1uF 50V M	
C301	QEKJ1AM-107Z	E CAPACITOR	100uF 10V M	
C304	QEKJ1CM-106Z	E CAPACITOR	10uF 16V M	
C306	QETJ1AM-227Z	E CAPACITOR	220uF 10V M	
C307	QDGB1HK-102Y	C CAPACITOR	1000pF 50V K	
C308	QDXB1CM-152Y	C CAPACITOR	1500pF 16V M	
C310	QCB1HK-223Y	C CAPACITOR	0.022uF 50V K	
C313	QEKJ1AM-107Z	E CAPACITOR	100uF 10V M	
C314	QCFB1HZ-105Y	C CAPACITOR	1uF 50V Z	
C316	QFG32AJ-223Z	PP CAPACITOR	0.022uF 100V J	
C319	QFLC1HJ-472Z	M CAPACITOR	4700pF 50V J	
C331	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	
C340	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	
C341	QEKJ1HM-105Z	E CAPACITOR	1uF 50V M	
C342	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	
C371	QEKJ1EM-475Z	E CAPACITOR	4.7uF 25V M	
C374	QEKJ1AM-107Z	E CAPACITOR	100uF 10V M	
C376	QDYB1CM-103Y	C CAPACITOR	0.01uF 16V M	
R101	QRE141J-512Y	C RESISTOR	5.1kΩ 1/4W J	
R102	QRE141J-512Y	C RESISTOR	5.1kΩ 1/4W J	
R104	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	
R105	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
R106	QRE141J-113Y	C RESISTOR	11kΩ 1/4W J	
R107	QRE141J-912Y	C RESISTOR	9.1kΩ 1/4W J	
R108	QRE141J-273Y	C RESISTOR	27kΩ 1/4W J	
R110	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R116	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R121	QRE141J-153Y	C RESISTOR	15kΩ 1/4W J	
R201	QRE141J-512Y	C RESISTOR	5.1kΩ 1/4W J	
R202	QRE141J-512Y	C RESISTOR	5.1kΩ 1/4W J	
R204	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	
R205	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
R206	QRE141J-113Y	C RESISTOR	11kΩ 1/4W J	
R207	QRE141J-912Y	C RESISTOR	9.1kΩ 1/4W J	
R208	QRE141J-273Y	C RESISTOR	27kΩ 1/4W J	
R210	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R216	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R221	QRE141J-153Y	C RESISTOR	15kΩ 1/4W J	
R301	QRE141J-221Y	C RESISTOR	220Ω 1/4W J	
R302	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	
R303	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	
R304	QRJ146J-101X	UNF C RESISTOR	100Ω 1/4W J	
R305	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R306	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	
△ R310	QRJ146J-4R7X	UNF C RESISTOR	4.7Ω 1/4W J	
R313	QRE141J-2R2Y	C RESISTOR	2.2Ω 1/4W J	
R314	QRE141J-153Y	C RESISTOR	15kΩ 1/4W J	
R315	QRE141J-101Y	C RESISTOR	100Ω 1/4W J	
R327	QRE141J-474Y	C RESISTOR	470kΩ 1/4W J	
R335	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	
R336	QRE141J-223Y	C RESISTOR	22kΩ 1/4W J	
R337	QRE141J-332Y	C RESISTOR	3.3kΩ 1/4W J	
R338	QRE141J-392Y	C RESISTOR	3.9kΩ 1/4W J	
R339	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
R340	QRE141J-471Y	C RESISTOR	470Ω 1/4W J	
R341	QRE141J-123Y	C RESISTOR	12kΩ 1/4W J	
R342	QRE141J-243Y	C RESISTOR	24kΩ 1/4W J	
R343	QRE141J-183Y	C RESISTOR	18kΩ 1/4W J	
R344	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	
R345	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	
R346	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	
R347	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
△ R353	QRZ9005-100X	FUSI RESISTOR	10Ω	
R371	QRE141J-123Y	C RESISTOR	12kΩ 1/4W J	
R372	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R375	QRE141J-151Y	C RESISTOR	150Ω 1/4W J	
R376	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	
VR31	QVP0008-203Z	TRIM RESISTOR	20kΩ	
VR37	QVP0077-103Z	TRIM RESISTOR	10kΩ	
L301	QQR1118-002	OSC COIL(BIAS)		
L303	QQL244K-100Z	COIL	10uH K	

△ Symbol No.	Part No.	Part Name	Description	Local
CN1	QGF1205F1-09	CONNECTOR	FFC/FPC (1-9)	
CN31	QGF1205F1-06	CONNECTOR	FFC/FPC (1-6)	
CN32	QGF1205F1-09	CONNECTOR	FFC/FPC (1-9)	
CN33	QGF1205F1-09	CONNECTOR	FFC/FPC (1-9)	
CN34	QGF1201F3-10	CONNECTOR	FFC/FPC (1-10)	
FW100	QUM024-07A2Z3-E	PARA RIBON WIRE		
H32	GV40397-002A	IC HOLDER		
P1	QNZ0104-001	POST PIN		
SW1	QSW0832-001	CASS.SWITCH		
SW2	QSW0832-001	CASS.SWITCH		
SW5	QSW0832-001	CASS.SWITCH		
SW6	QSW0859-001	DETECT SWITCH		


< MEMO >

Packing materials and accessories parts list

(DX-T99)

Block No. M 4 M M

No additional / supplemental order of WARRANTY CARDS are available

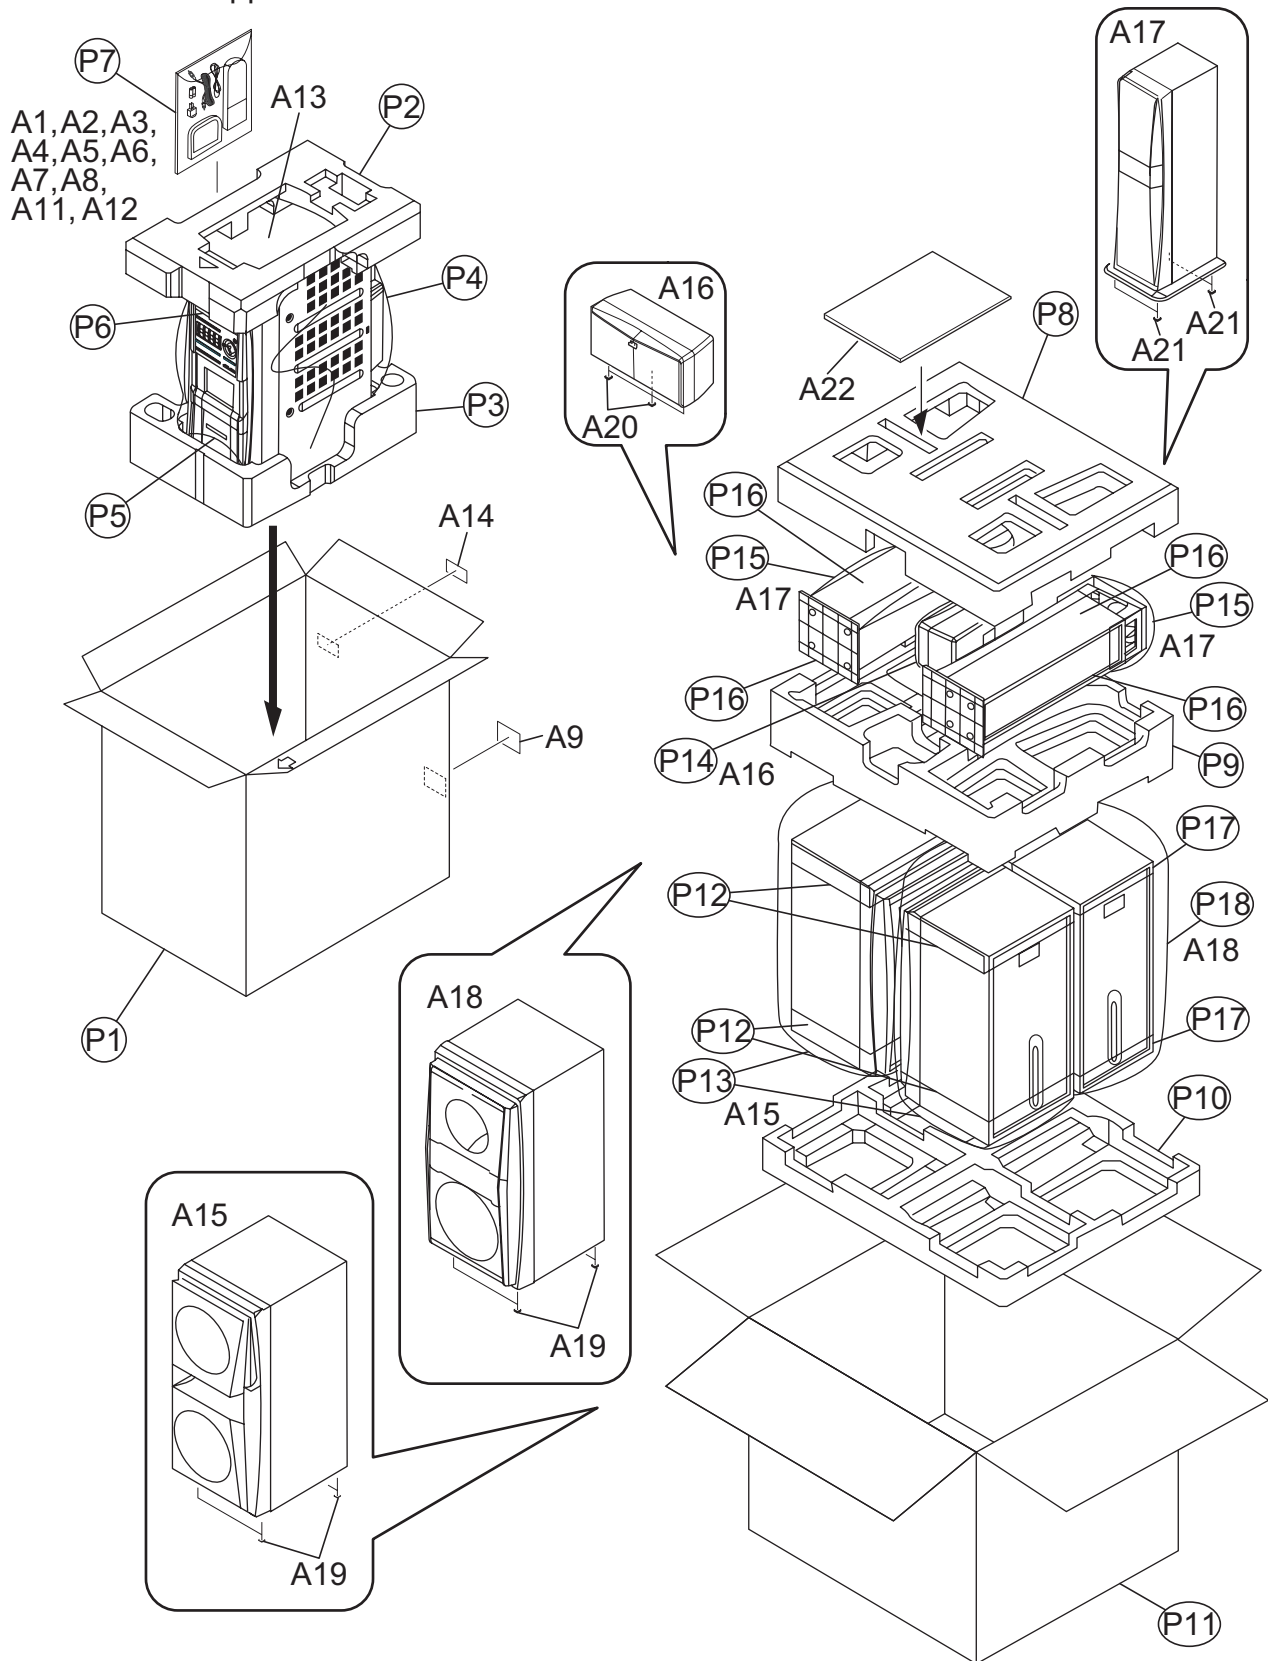

Packing and Accessories (DX-T99)

Block No. [M][4][M][M]


△	Symbol No.	Part No.	Part Name	Description	Local
	A 1	GVT0166-005A	INST BOOK	ENG	T99A
	A 1	GVT0166-004A	INST BOOK	RUS	T99EE
	A 1	GVT0166-001A	INST BOOK	ENG CHI(PEKIN)	T99US, T99UN
	A 1	GVT0166-003A	INST BOOK	ENG SPA POR	T99UW
	A 1	GVT0166-002A	INST BOOK	ENG ARA PER	T99UX, T99UG
	A 2	QAL0014-003	AM LOOP ANT		
△	A 3	QAM0112-002	PLUG ADAPTOR		T99US, T99UW, T99UN
	A 4	QAM0216-001	SIGNAL CORD		
	A 5	RM-SDXT99U	REMOCON		
	A 6	QAL0457-001	ANT.WIRE		
	A 7	-----	BATTERY	1.5V(x2)	
	A 8	GV40634-001A	DEMO SHEET		T99A, T99US, T99UW, T99UX, T99UG, T99UN
	A 8	GV40634-002A	DEMO SHEET		T99EE
	A 9	LE40796-001A	VERANCE LABEL		
	A 11	-----	WARRANTY CARD	BT-56012-1	T99A
	A 12	-----	WARRANTY CARD	BT-54028-1	T99EE
	A 13	GVT0184-001A	VOL SEL SHEET		T99UN
	A 14	GV40641-002A	NOM LABEL		T99UW
	A 14	GV40597-001A	SASO LABEL		T99UX
	A 15	ASL8MXT99-EB10	SPEAKER BOX	MAIN SPK(x2)	
	A 16	ASL8CXT99-EB10	SPEAKER BOX	CENTER SPK	
	A 17	ASL8SXT99-EB10	SPEAKER BOX	SURROUND SPK(x2)	
	A 18	ASL8WXT99-EB10	SPEAKER BOX	SUBWOOFER(x2)	T99A, T99EE, T99US, T99UX, T99UG
	A 18	ASL8WXT99-EB20	SPEAKER BOX	SUBWOOFER(x2)	T99UN
	A 18	ASL8WXT99-EB30	SPEAKER BOX	SUBWOOFER(x2)	T99UW
	A 19	DUF803001-0001	LEG CUSHION	(x16)	
	A 20	DUF803001-0002	LEG CUSHION	(x3)	
	A 21	DUF803001-0003	LEG CUSHION	(x8)	
	A 22	YOM800001-0273	USER MANUAL	ENG ARA PER CHI	T99A, T99US, T99UX, T99UG, T99UN
	A 22	YOM800001-0274	USER MANUAL	ENG SPA POR	T99UW
	A 22	YOM800001-0275	USER MANUAL	RUS	T99EE
	P 1	GV20421-002A	CARTON ASSY.		T99A, T99UW
	P 1	GV20421-004A	CARTON ASSY.		T99EE
	P 1	GV20421-003A	CARTON ASSY.		T99US, T99UN
	P 1	GV20421-001A	CARTON ASSY.		T99UX, T99UG
	P 2	GV10341-001A	CUSHION (TOP)		
	P 3	GV10342-001A	CUSHION (BOTTOM)		
	P 4	QPC07507530P	POLY BAG	75cm x 75cm	
	P 5	GV40168-014A	SHEET		
	P 6	GV40168-015A	SHEET		
	P 7	QPC02503515P	POLY BAG	25cm x 35cm	
	P 8	ITF830366-0001	TOP CUSHION		
	P 9	ITF830366-0002	CENTER CUSHION		
	P 10	ITF830366-0003	BOTTOM CUSHION		
	P 11	ICC8DXT99-EB10	PACKING CASE		T99A, T99US, T99UW, T99UX, T99UG, T99UN
	P 11	ICC8DXT99-EB40	PACKING CASE		T99EE
	P 12	IVH803001-0006	MIRAMAT SHEET	(x4)	
	P 13	IVA803101-0024	HDPE BAG	(x2)	
	P 14	IVA803101-0023	HDPE BAG		
	P 15	IVA803101-0027	HDPE BAG	(x2)	
	P 16	IVH803001-0009	MIRAMAT SHEET	(x4)	
	P 17	IVH803001-0007	MIRAMAT SHEET	(x4)	
	P 18	IVA803101-0025	HDPE BAG	(x2)	

Packing materials and accessories parts list

(DX-T77)

Block No. M 5 M M

No additional / supplemental order of WARRANTY CARDS are available

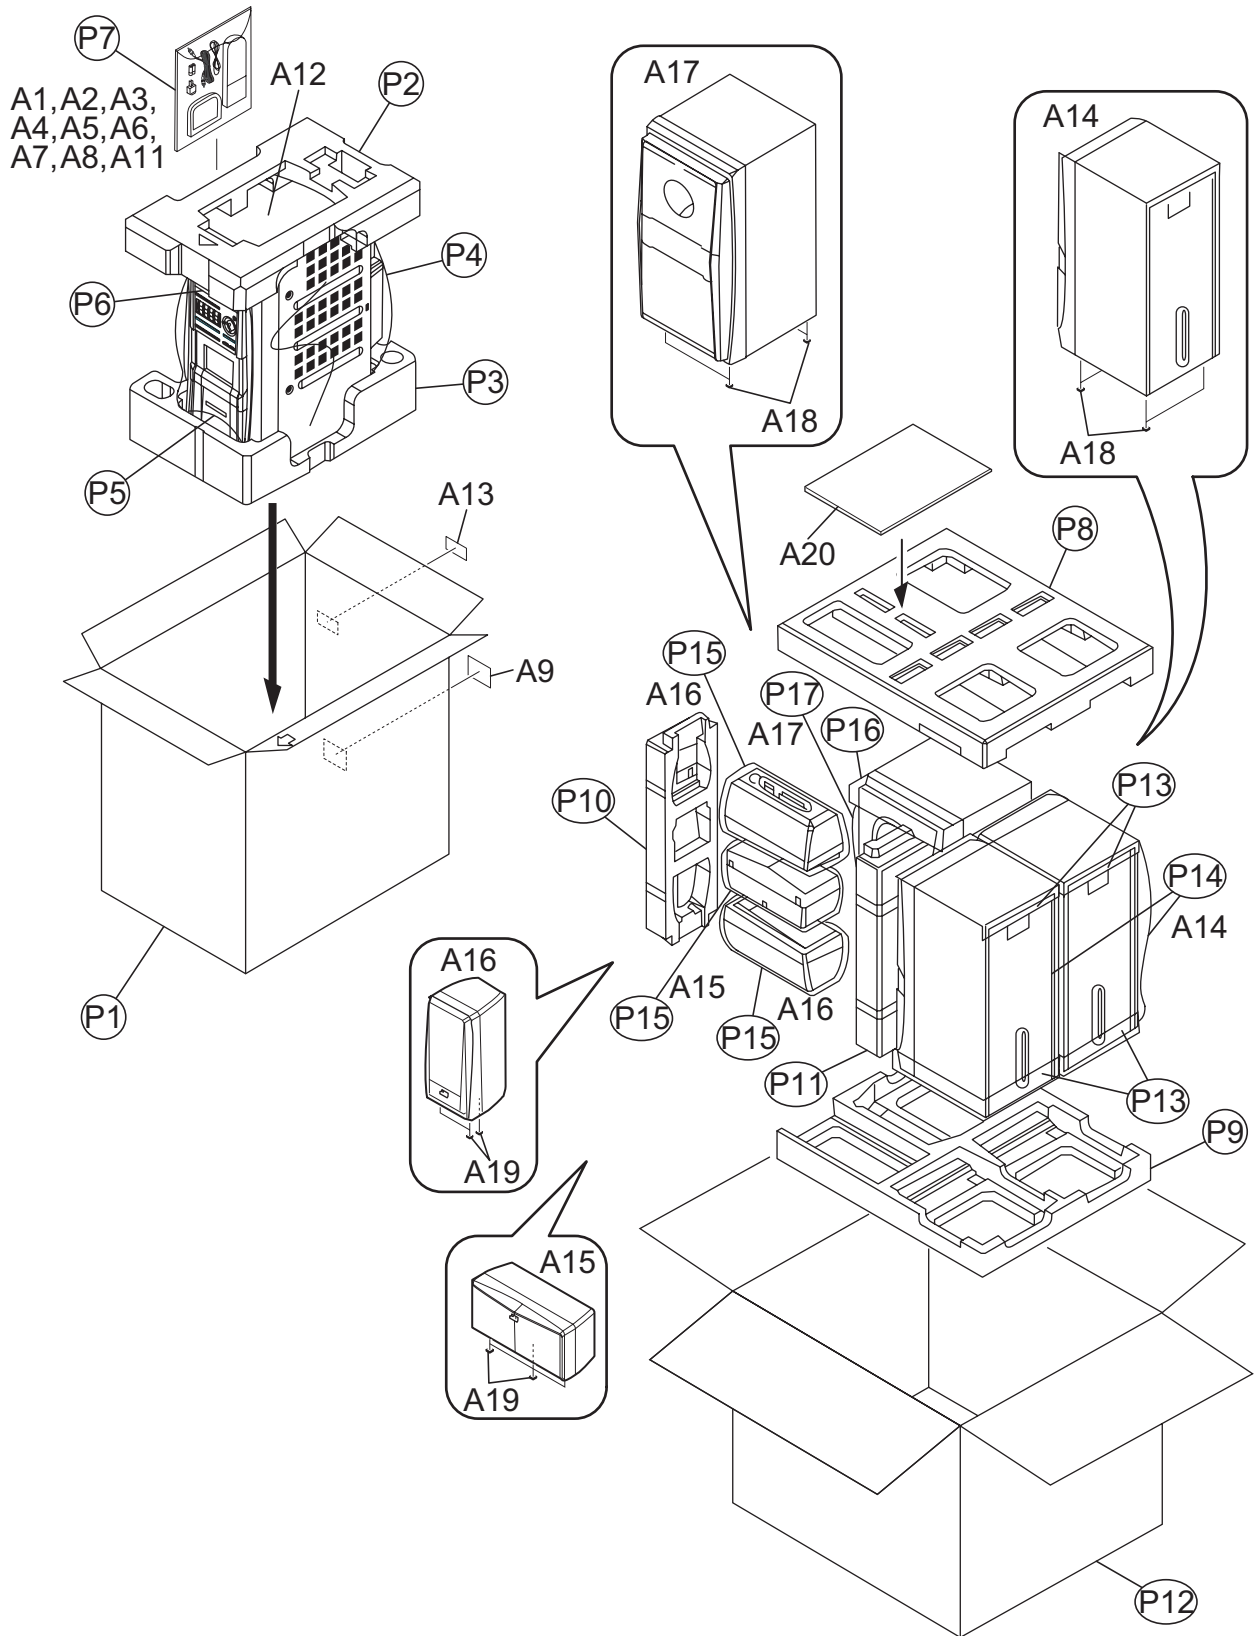

Packing and Accessories (DX-T77)

Block No. [M][5][M][M]


△	Symbol No.	Part No.	Part Name	Description	Local
	A 1	GVT0166-004A	INST BOOK	RUS	T77EE
	A 1	GVT0166-001A	INST BOOK	ENG CHI(PEKIN)	T77US,T77UN
	A 1	GVT0166-003A	INST BOOK	ENG SPA POR	T77UW
	A 1	GVT0166-002A	INST BOOK	ENG ARA PER	T77UX,T77UG
	A 1	GVT0166-006A	INST BOOK	SPA	T77UY
	A 2	QAL0014-003	AM LOOP ANT		
△	A 3	QAM0112-002	PLUG ADAPTOR		T77US,T77UW,T77UN
	A 4	QAM0216-001	SIGNAL CORD		
	A 5	RM-SDXT99U	REMOCON		
	A 6	QAL0457-001	ANT.WIRE		
	A 7	-----	BATTERY	1.5V(x2)	
	A 8	GV40634-002A	DEMO SHEET		T77EE
	A 8	GV40634-001A	DEMO SHEET		T77US,T77UW,T77UX,T77UY,T77UG,T77UN
	A 9	LE40796-001A	VERANCE LABEL		
	A 11	-----	WARRANTY CARD	BT-54028-1	T77EE
	A 12	GVT0184-001A	VOL SEL SHEET		T77UN
	A 13	GV40641-002A	NOM LABEL		T77UW
	A 14	ASL8MXT99-EB10	SPEAKER BOX	MAIN SPK(x2)	
	A 15	ASL8CXT77-EB10	SPEAKER BOX	CENTER SPK	
	A 16	ASL8SXT77-EB10	SPEAKER BOX	SURROUND SPK(x2)	
	A 17	ASL8WXT99-EB10	SPEAKER BOX	SUBWOOFER	T77EE,T77US,T77UX,T77UG
	A 17	ASL8WXT99-EB30	SPEAKER BOX	SUBWOOFER	T77UW,T77UY
	A 17	ASL8WXT99-EB20	SPEAKER BOX	SUBWOOFER	T77UN
	A 18	DUF803001-0001	LEG CUSHION	(x12)	
	A 19	DUF803001-0002	LEG CUSHION	(x9)	
	A 20	YOM800001-0270	USER MANUAL	ENG ARA PER CHI	T77US,T77UX,T77UG,T77UN
	A 20	YOM800001-0272	USER MANUAL	RUS	T77EE
	A 20	YOM800001-0271	USER MANUAL	ENG SPA POR	T77UW,T77UY
	P 1	GV20422-004A	CARTON ASSY.		T77EE
	P 1	GV20422-003A	CARTON ASSY.		T77US,T77UN
	P 1	GV20422-002A	CARTON ASSY.		T77UW,T77UY
	P 1	GV20422-001A	CARTON ASSY.		T77UX,T77UG
	P 2	GV10341-001A	CUSHION (TOP)		
	P 3	GV10342-001A	CUSHION (BOTTOM)		
	P 4	QPC07507530P	POLY BAG	75cm x 75cm	
	P 5	GV40168-014A	SHEET		
	P 6	GV40168-015A	SHEET		
	P 7	QPC02503515P	POLY BAG	25cm x 35cm	
	P 8	ITF830365-0001	TOP CUSHION		
	P 9	ITF830365-0002	BOTTOM CUSHION		
	P 10	ITF830365-0003	CUSHION		
	P 11	ITF830365-0004	CUSHION		
	P 12	ICC8DXT77-EB10	PACKING CASE		T77US,T77UW,T77UX,T77UY,T77UG,T77UN
	P 12	ICC8DXT77-EB50	PACKING CASE		T77EE
	P 13	IVH803001-0006	MIRAMAT SHEET	(x4)	
	P 14	IWA803101-0024	HDPE BAG	(x2)	
	P 15	IWA803101-0023	HDPE BAG	(x3)	
	P 16	IVH803001-0007	MIRAMAT SHEET	(x2)	
	P 17	IWA803101-0025	HDPE BAG		

Packing materials and accessories parts list

(DX-T66)

Block No. M 6 M M

No additional / supplemental order of WARRANTY CARDS are available

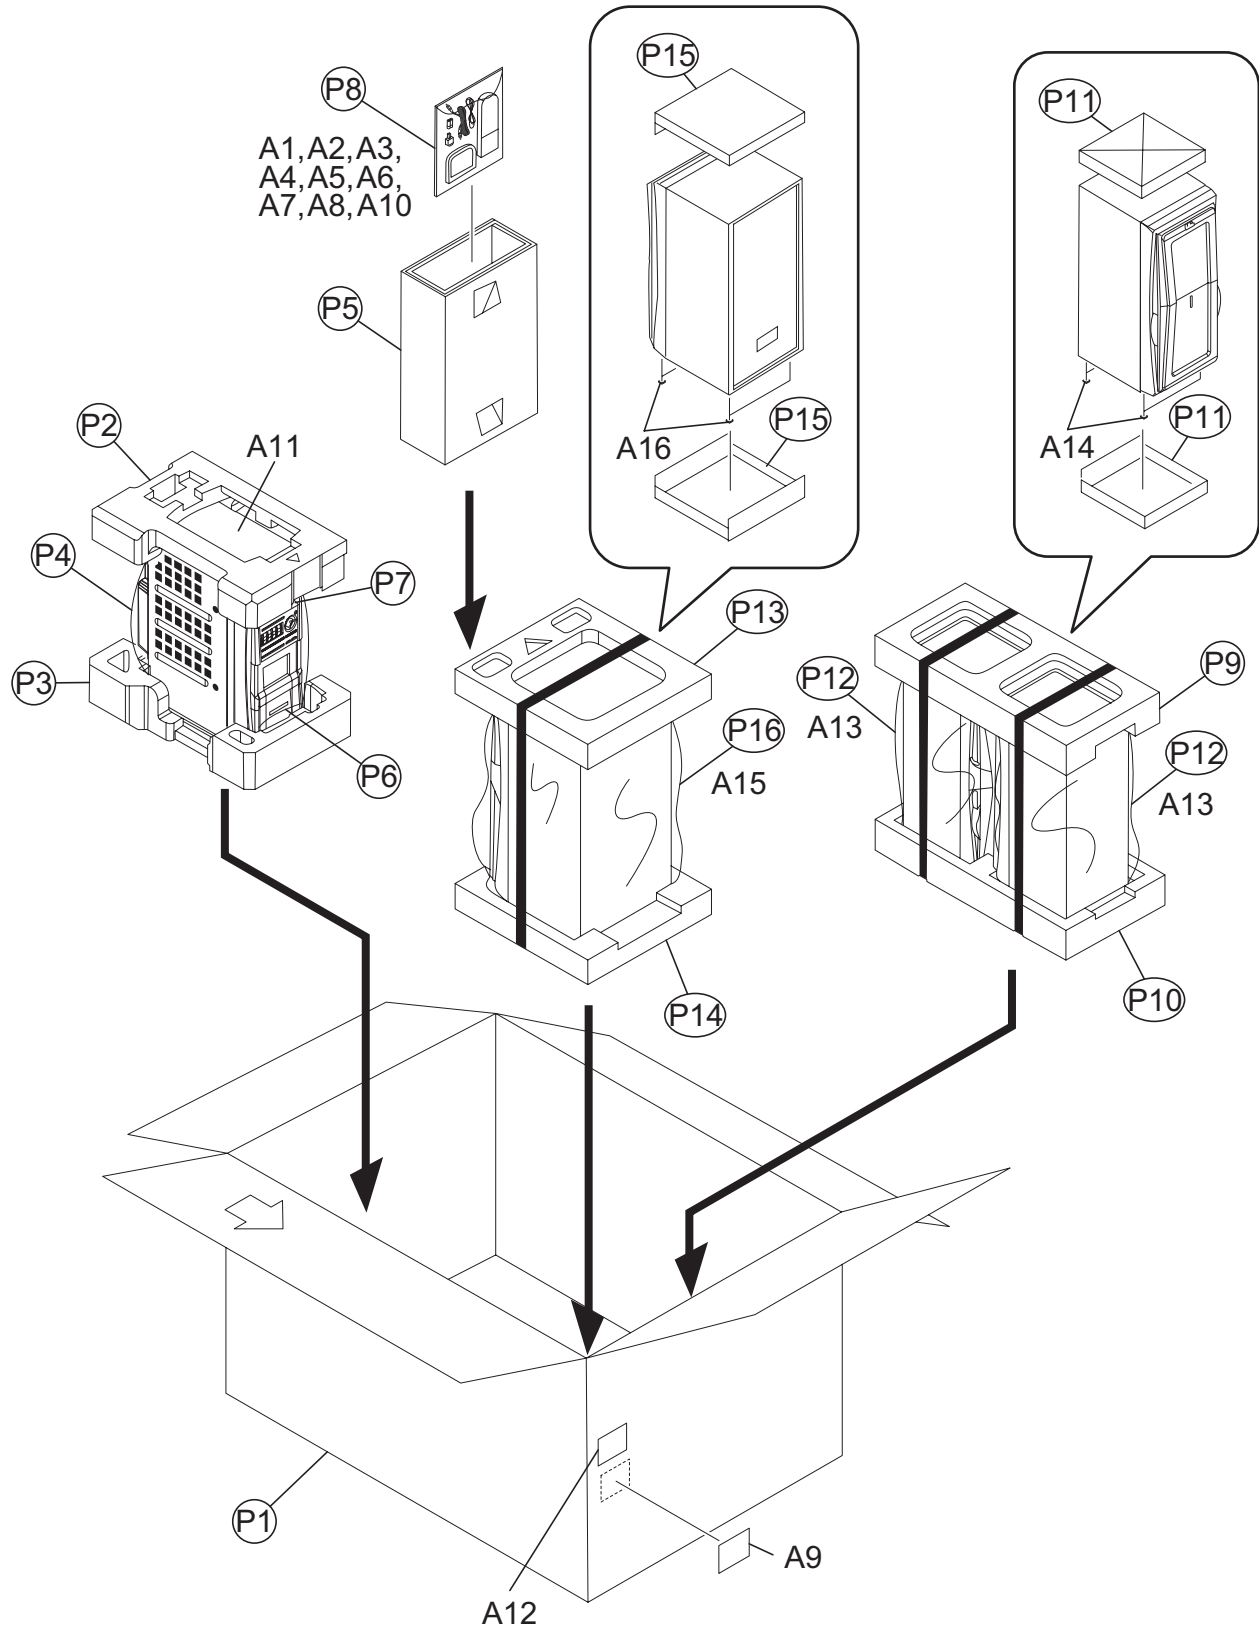

Packing and Accessories (DX-T66)

Block No. [M][6][M][M]

△	Symbol No.	Part No.	Part Name	Description	Local
	A 1	GVT0165-004A	INST BOOK	RUS	T66EE
	A 1	GVT0165-001B	INST BOOK	ENG CHI/(PEKIN)	T66US, T66UN
	A 1	GVT0165-003A	INST BOOK	ENG SPA POR	T66UW
	A 1	GVT0165-002B	INST BOOK	ENG ARA PER	T66UX, T66UG
	A 1	GVT0165-006A	INST BOOK	SPA	T66UY
	A 2	QAL0014-003	AM LOOP ANT		
△	A 3	QAM0112-002	PLUG ADAPTOR		T66US, T66UW, T66UN
	A 4	QAM0216-001	SIGNAL CORD		
	A 5	RM-SDXT66U	REMOCON		
	A 6	QAL0457-001	ANT.WIRE		
	A 7	-----	BATTERY	1.5V(x2)	
	A 8	GV40634-002A	DEMO SHEET		T66EE
	A 8	GV40634-001A	DEMO SHEET		T66US, T66UW, T66UX, T66UY, T66UG, T66UN
	A 9	LE40796-001A	VERANCE LABEL		
	A 10	-----	WARRANTY CARD	BT-54028-1	T66EE
	A 11	GVT0184-001A	VOL SEL SHEET		T66UN
	A 12	GV40641-002A	NOM LABEL		T66UW
	A 13	ASL8MXT66-EB10	SPEAKER BOX	MAIN SPK(x2)	
	A 14	DUF803001-0001	LEG CUSHION	(x8)	
	A 15	GV30911-001A	SPEAKER BOX	SUBWOOFER	
	A 16	DUF803001-0001	LEG CUSHION	(x4)	
P 1		GV20423-008A	CARTON ASSY		T66EE
P 1		GV20423-007A	CARTON ASSY		T66US, T66UN
P 1		GV20423-006A	CARTON ASSY		T66UW, T66UY
P 1		GV20423-005A	CARTON ASSY		T66UX, T66UG
P 2		GV10339-002A	CUSHION (TOP)		
P 3		GV10340-002A	CUSHION (BOTTOM)		
P 4		QPC07507530P	POLY BAG	75cm x 75cm	
P 5		GV30916-002A	CARTON SPACER		
P 6		GV40168-014A	SHEET		
P 7		GV40168-015A	SHEET		
P 8		QPC02503515P	POLY BAG	25cm x 35cm	
P 9		ITF830361-0001	TOP CUSHION		
P 10		ITF830361-0002	BOTTOM CUSHION		
P 11		IVH803001-0006	MIRAMAT SHEET	(x4)	
P 12		IVA803101-0024	HDPE BAG	(x2)	
P 13		ITF830364-0001	TOP CUSHION		
P 14		ITF830364-0002	BOTTOM CUSHION		
P 15		IVH803001-0007	MIRAMAT SHEET	(x2)	
P 16		IVA803101-0025	HDPE BAG		