

Features

- CMOS technology
- Low power consumption
- Two voltage output channel in the same chip
- 16-bit dynamic range
- Low total harmonic distortion
- 5 voltage single power supply
- 8-pin SOP package

Applications

- Digital audio equipment
- CD ROM/VCD
- MPEG card

General Description


HT82V731 is a 16-bit digital-to-analog converter IC utilizing CMOS technology specially designed for stereo audio application.

HT82V731 converts the 16 bits serial data into an analog output voltage. The digital data is internally converted to floating point expression whose format consists of 10 bits mantissa and 7step exponent.


Using an R-string voltage divider, this floating point expression data is then converted to analog voltage.

It is compatible with TDA1311. It is available in 8-pin SOP package.

Block Diagram

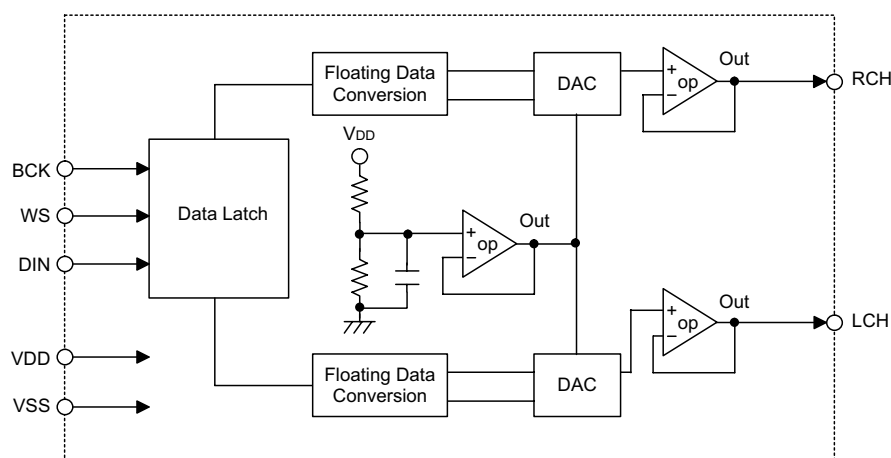

Pin Assignment

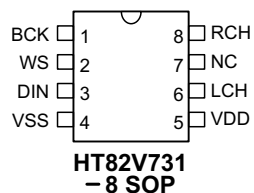

Pin Description


Pin No.	Pin Name	I/O	Description
1	BCK	I	Bit serial clock input
2	WS	I	Word select input
3	DIN	I	Data input
4	VSS	—	Negative power supply
5	VDD	—	Positive power supply
6	LCH	O	Left channel output
7	NC	—	No connection
8	RCH	O	Right channel output

Electrical Characteristics


Ta=25°C

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
		V _{DD}	Conditions				
V _O	Maximum Output Amplitude	5V	—	—	2.5	—	V _{pp}
THD	Total Harmonic Distortion	5V	1kHz, 0dB	—	0.12	—	%
DR	Dynamic Range	5V	—	—	16	—	Bit
S/N	Signal to Noise Ratio	5V	1kHz, 0dB	—	82	—	dB
CT	Cross Talk	5V	1kHz, 0dB	—	—	—	dB

Timing Diagrams

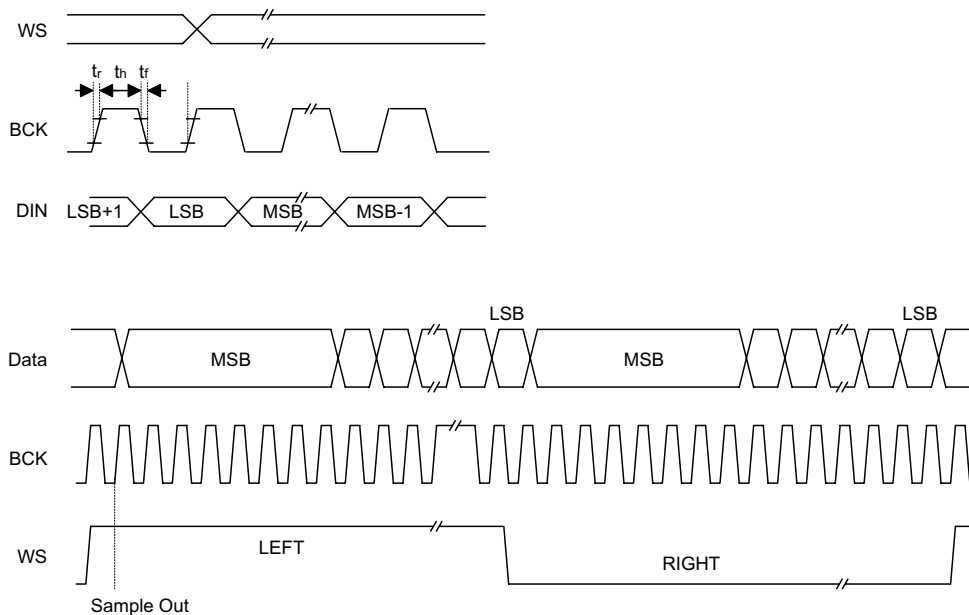

Application Circuits

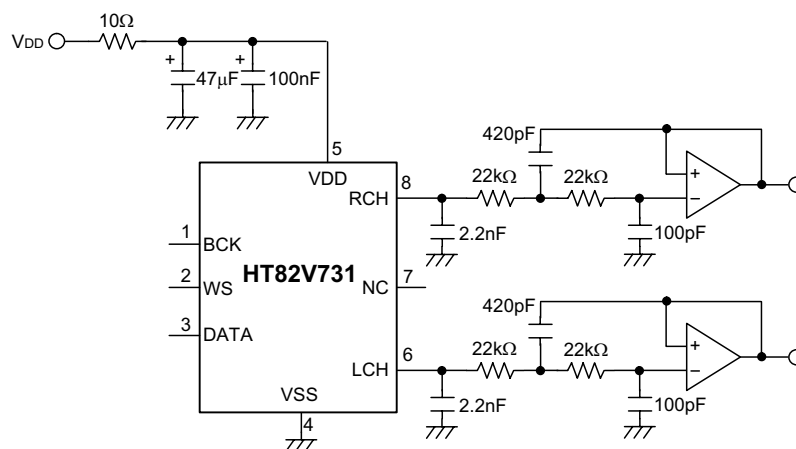

Holtek Semiconductor Inc. (Headquarters)

No.3, Creation Rd. II, Science-based Industrial Park, Hsinchu, Taiwan
Tel: 886-3-563-1999
Fax: 886-3-563-1189

Holtek Semiconductor Inc. (Taipei Office)

11F, No.576, Sec.7 Chung Hsiao E. Rd., Taipei, Taiwan
Tel: 886-2-2782-9635
Fax: 886-2-2782-9636
Fax: 886-2-2782-7128 (International sales hotline)

Holtek Semiconductor (Hong Kong) Ltd.

RM.711, Tower 2, Cheung Sha Wan Plaza, 833 Cheung Sha Wan Rd., Kowloon, Hong Kong
Tel: 852-2-745-8288
Fax: 852-2-742-8657

Holtek Semiconductor (Shanghai) Ltd.

7th Floor, Building 2, No.889, Yi Shan Rd., Shanghai, China
Tel: 021-6485-5560
Fax: 021-6485-0313

Holmate Technology Corp.

48531 Warm Springs Boulevard, Suite 413, Fremont, CA 94539
Tel: 510-252-9880
Fax: 510-252-9885

Copyright © 2000 by HOLTEK SEMICONDUCTOR INC.

The information appearing in this Data Sheet is believed to be accurate at the time of publication. However, Holtek assumes no responsibility arising from the use of the specifications described. The applications mentioned herein are used solely for the purpose of illustration and Holtek makes no warranty or representation that such applications will be suitable without further modification, nor recommends the use of its products for application that may present a risk to human life due to malfunction or otherwise. Holtek reserves the right to alter its products without prior notification. For the most up-to-date information, please visit our web site at <http://www.holtek.com.tw>.