


- 1) Enter SERVICE MODE : Press keys of User Remocon, as follows.  
Ch91, Sharpness 0, Skip(red), Move(green), Menu.
- 2) Choice SERVICE MENU : Pr-Up/Down
- 3) Enter SERVICE SUB MENU : Vol-Up/Down

# CM-908/F CHASSIS Ver. 1

## PIP OPTION

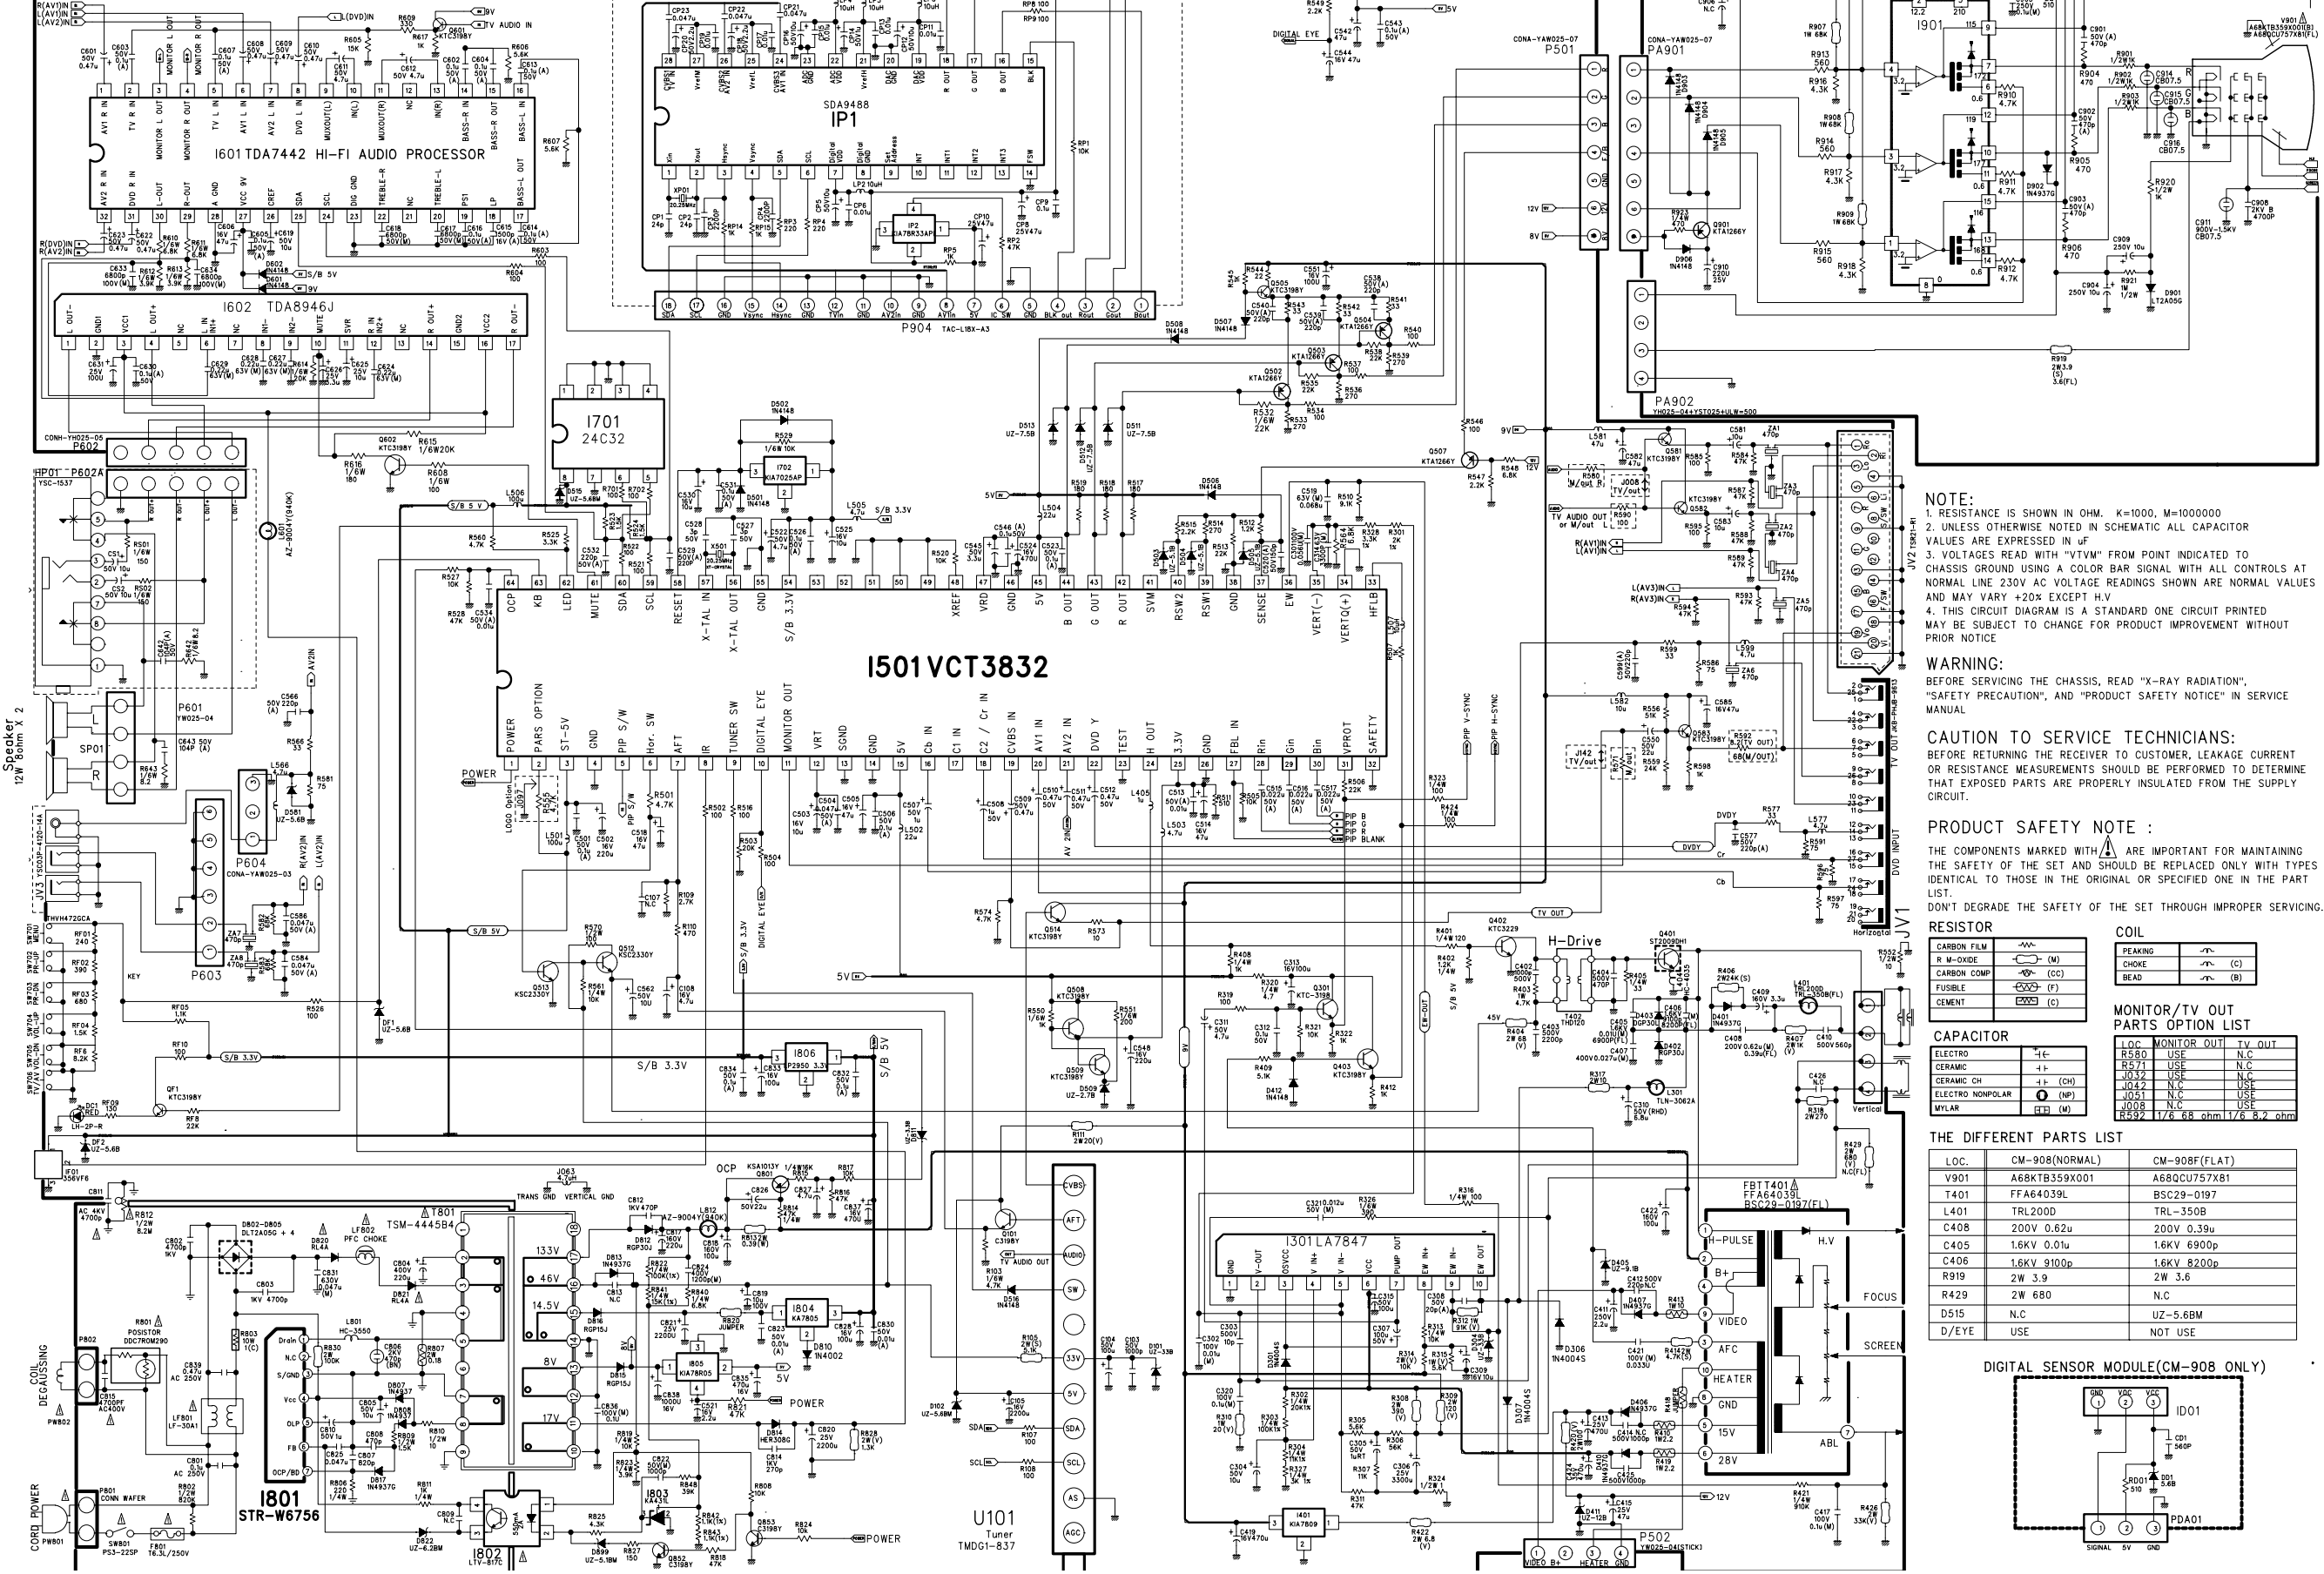

**NOTE:**  
 1. RESISTANCE IS SHOWN IN OHM. K=1000, M=1000000  
 2. UNLESS OTHERWISE NOTED IN SCHEMATIC ALL CAPACITOR VALUES ARE EXPRESSED IN  $\mu$ F  
 3. VOLTAGES READ WITH "VTVM" FROM POINT INDICATED TO CHASSIS GROUND USING A COLOR BAR SIGNAL WITH ALL CONTROLS AT NORMAL LINE 230V AC VOLTAGE READINGS SHOWN ARE NORMAL VALUES AND MAY VARY  $\pm 20\%$  EXCEPT H.V.  
 4. THIS CIRCUIT DIAGRAM IS A STANDARD ONE CIRCUIT PRINTED MAY BE SUBJECT TO CHANGE FOR PRODUCT IMPROVEMENT WITHOUT PRIOR NOTICE

**WARNING:**  
 BEFORE SERVICING THE CHASSIS, READ "X-RAY RADIATION", "SAFETY PRECAUTION", AND "PRODUCT SAFETY NOTICE" IN SERVICE MANUAL

**CAUTION TO SERVICE TECHNICIANS:**  
 BEFORE RETURNING THE RECEIVER TO CUSTOMER, LEAKAGE CURRENT OR RESISTANCE MEASUREMENTS SHOULD BE PERFORMED TO DETERMINE THAT EXPOSED PARTS ARE PROPERLY INSULATED FROM THE SUPPLY CIRCUIT.

**PRODUCT SAFETY NOTE :**  
 THE COMPONENTS MARKED WITH  $\Delta$  ARE IMPORTANT FOR MAINTAINING THE SAFETY OF THE SET AND SHOULD BE REPLACED ONLY WITH TYPES IDENTICAL TO THOSE IN THE ORIGINAL OR SPECIFIED ONE IN THE PART LIST. DON'T DEGRADE THE SAFETY OF THE SET THROUGH IMPROPER SERVICING.

**RESISTOR**

CARBON FILM	
R-M-OXIDE	
CARBON COMP	
FUSIBLE	
CEMENT	

**COIL**

PEAKING	
CHOKING	
BEAD	

**CAPACITOR**

ELECTRO	
CERAMIC	
CERAMIC CH	
ELECTRO NONPOLAR	
MYLAR	

**MONITOR/TV OUT PARTS OPTION LIST**

LOC	MONITOR OUT	TV OUT
ELECTRO	USE	N.C.
R571	USE	N.C.
J025	USE	N.C.
J026	USE	N.C.
J051	N.C.	USE
J008	N.C.	USE
R592	176.68 ohm	176.6.2 ohm

**THE DIFFERENT PARTS LIST**

LOC.	CM-908(NORMAL)	CM-908F(FLAT)
V901	A69KT8359X001	A68QC0757X81
T401	FFA64039L	BSC29-0197
L401	TRL200D	TRL-350B
C408	200V 0.62u	200V 0.39u
C405	1.6KV 0.01u	1.6KV 6900p
C406	1.6KV 9100p	1.6KV 8200p
R919	2W 3.9	2W 3.6
R429	2W 680	N.C.
D515	N.C.	UZ-5.6BM
D/EYE	USE	NOT USE

