


CTV CHASSIS 12.1

6 BZ 820-02

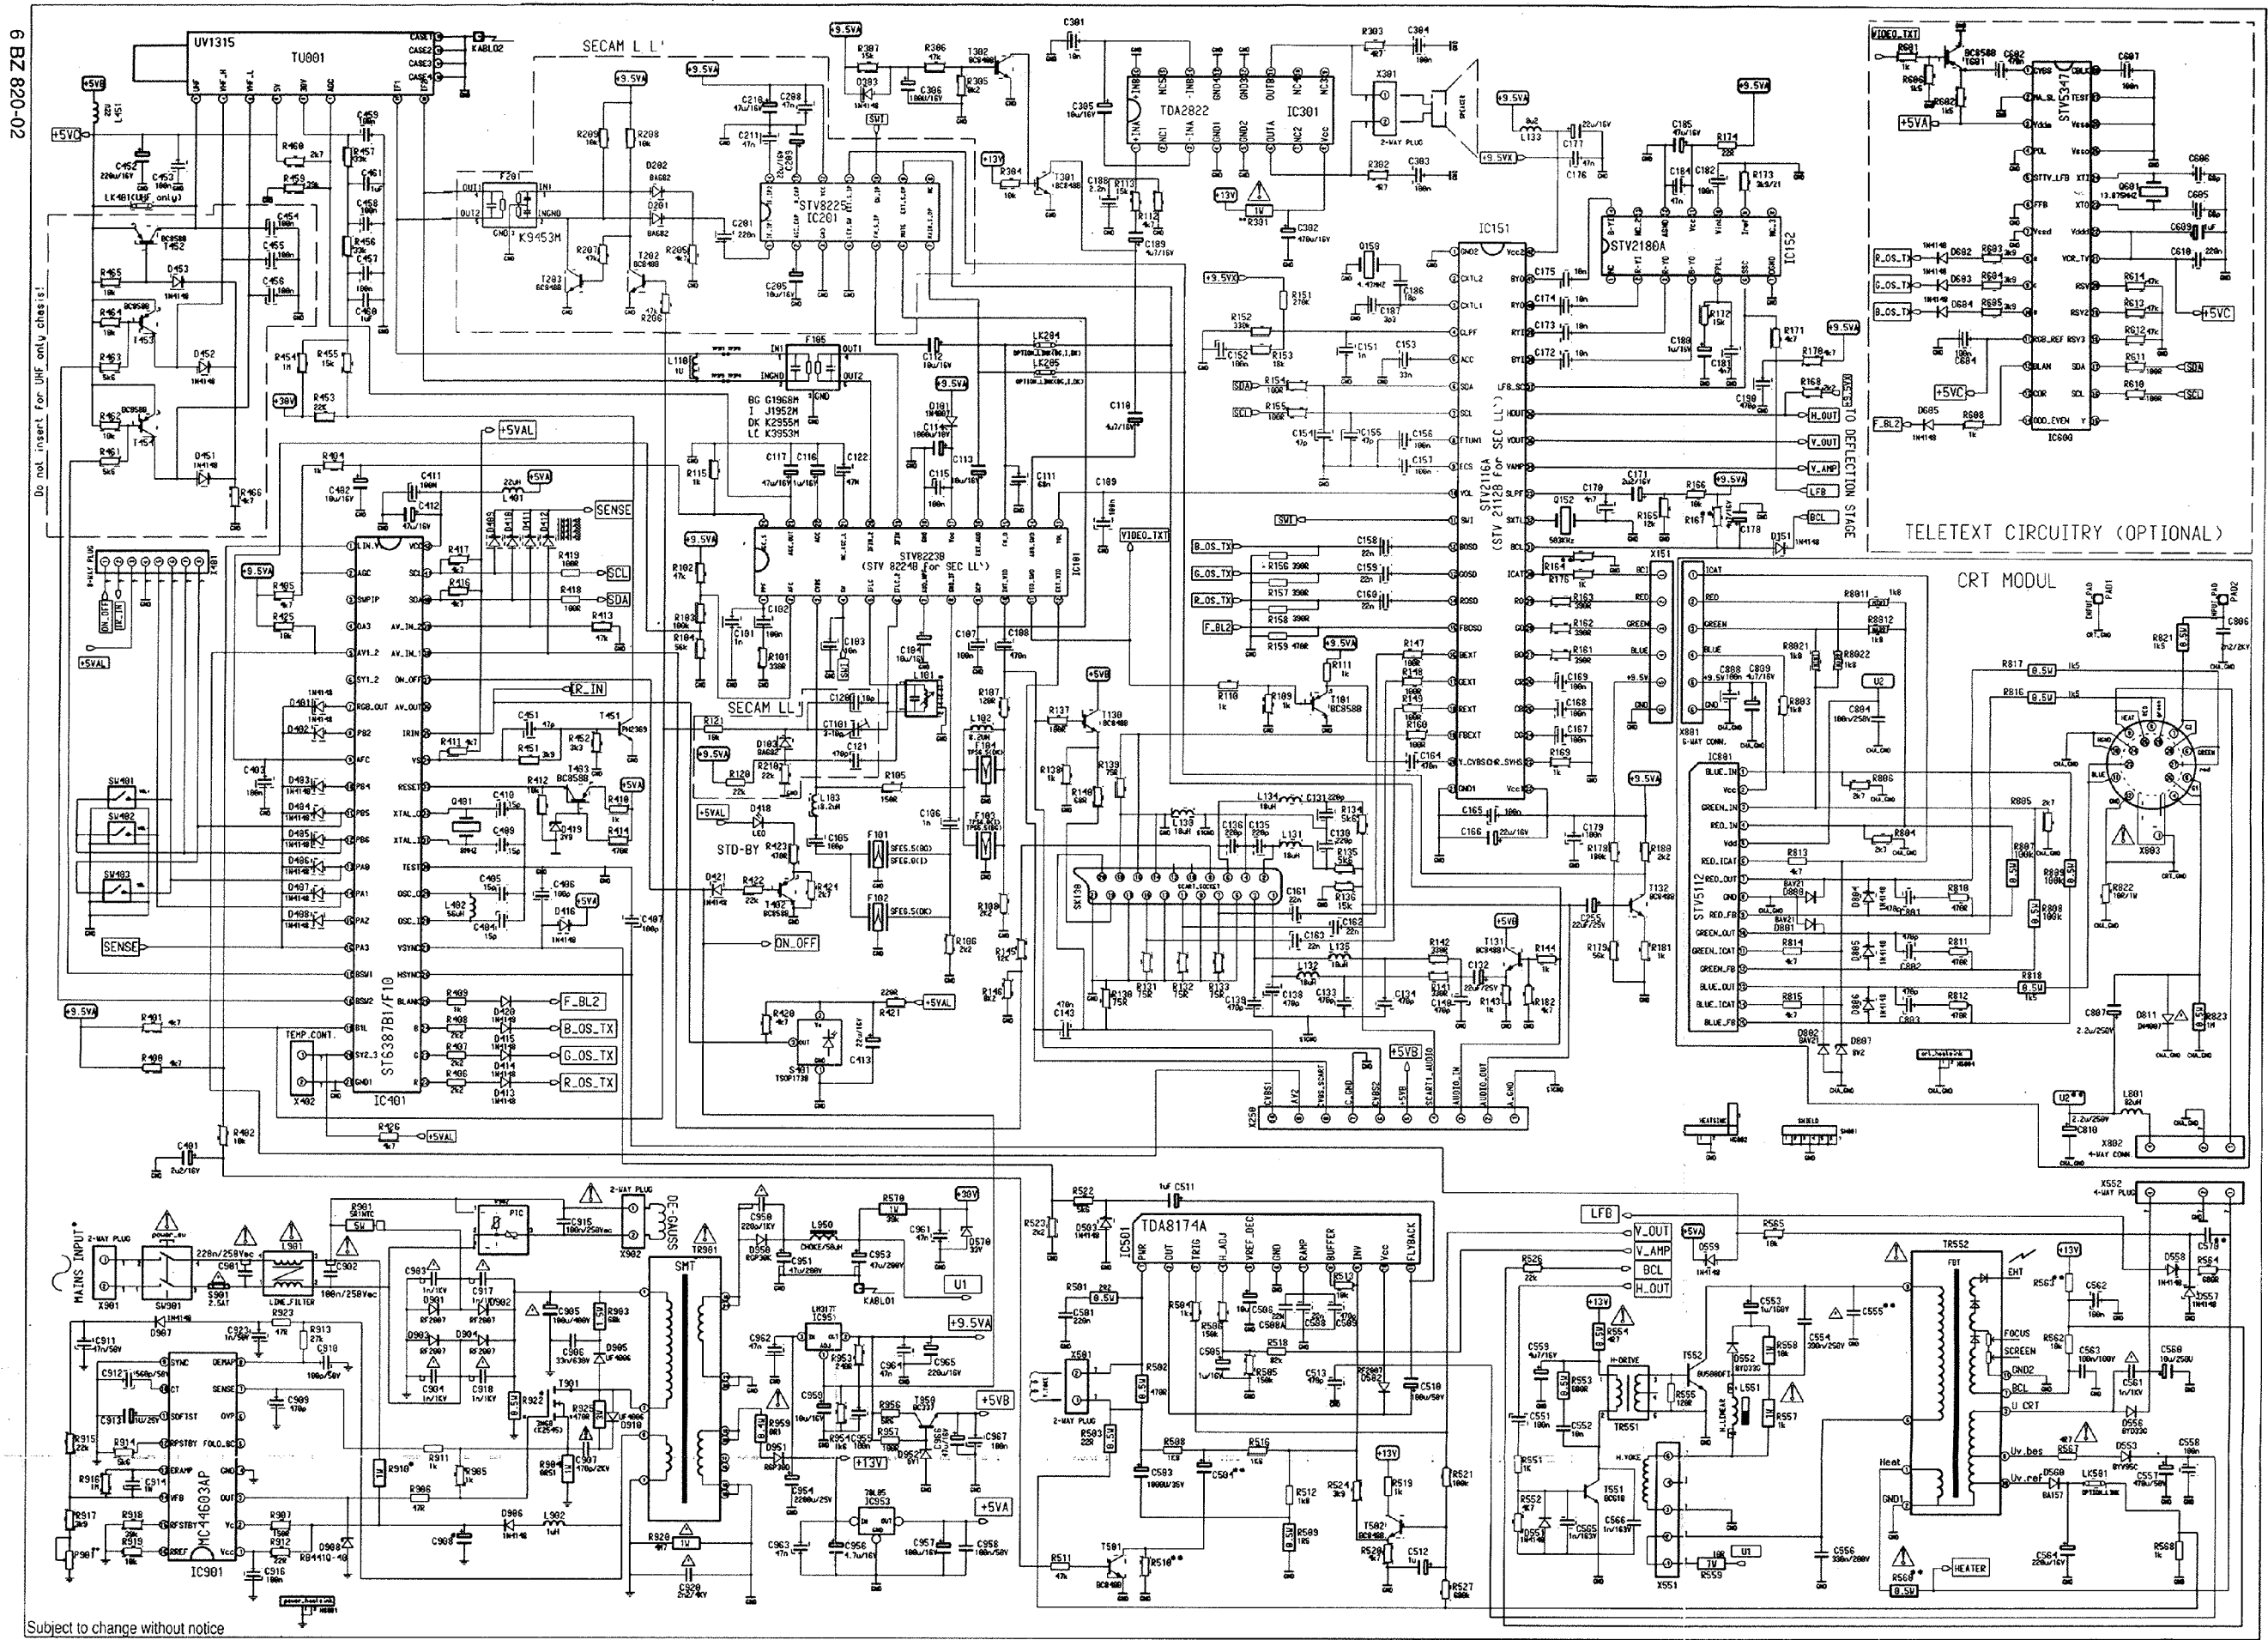

Subject to change without notice

D401: UHF ONLY TUNER
 D403: BACKGROUND FREE OSD
 D411: AV2
 D407: SEC L/L
 OSD_LANG_ENGLISH: D404
 OSD_LANG_FRENCH: D404 and D405
 OSD_LANG_GERMAN: D495
 OSD_LANG_ITALIAN: D402

* Operation Range 105VAC~270VAC: R910= 47K; R922=470K; C908=68uF
 * Operation Range 140VAC~270VAC: R910=120K; R922= -; C908=47uF

** 14" SAMSUNG CPT: U1=108V; R510=150R; R560=1R2; R563=8k2; C504=100uF; C555=6n8F; R164=47k; R167=220k; J2=185V; P901=1k5; R527=open; R301=3R3; C570=open
 14" LG CPT: U1=104V; R510=150R; R560=1R2; R563=8k2; C504=100uF; C555=6n8F; R164=47k; R167=220k; J2=185V; P901=1k5; R527=680k; R301=3R3; C570=open
 14" PHILIPS CPT: U1=107V; R510=150R; R560=1R2; R563=8k2; C504=100uF; C555=6n8F; R164=47k; R167=220k; J2=185V; P901=1k5; R527=680k; R301=3R3; C570=open
 14" TRICO CPT: U1=113V; R510=150R; R560=1R2; R563=8k2; C504=100uF; C555=6n8F; R164=47k; R167=220k; J2=185V; P901=1k5; R527=open; R301=3R3; C570=open
 20" SAMSUNG CPT: U1=121V; R510=100R; R560=R47; R563=6k8; C504=220uF; C555=3n1F; R164=15k; R167=100k; J2=220V; P901=2k2; R527=open; R301=2R2; C570=10nF
 20" LG CPT: U1=117V; R510=100R; R560=R22; R563=6k8; C504=220uF; C555=3n1F; R164=15k; R167=100k; J2=220V; P901=2k2; R527=open; R301=2R2; C570=10nF
 21" SAMSUNG CPT: U1=119V; R510=100R; R560=R47; R563=6k8; C504=220uF; C555=3n1F; R164=15k; R167=100k; J2=220V; P901=2k2; R527=680k; R301=2R2; C570=10nF
 21" LG CPT: U1=113V; R510=100R; R560=R10; R563=6k8; C504=220uF; C555=3n1F; R164=15k; R167=100k; J2=220V; P901=2k2; R527=680k; R301=2R2; C570=10nF

EMC related components: C130, C131, C133, C134, C135, C136, C138, C139