


TA8696F

γ CORRECTION IC FOR LCD TV

TA8696F operates with a power supply voltage of 3.3~7.5 V and can be directly driven with a dry battery.

FEATURES

- Enables high-precision γ correction using logarithmic compression.
- γ correction for Normally White LCD panel is possible.
- Offset/Cancel input circuit enables high-quality γ correction without distorting the primary color input signals.
- Cut-off voltage and drive voltage can be independently controlled.
- Unsusceptible to negative effects of fluctuation of power supply voltage.
- Either Latch Mode or Through Mode can be selected using the CH display mode switching pin.

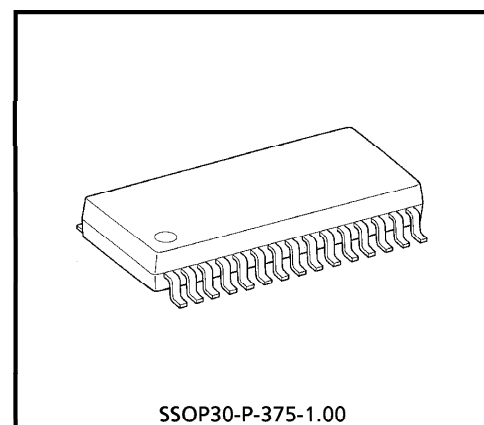


Weight : 0.63 g (Typ.)

980910EBA1

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

BLOCK DIAGRAM

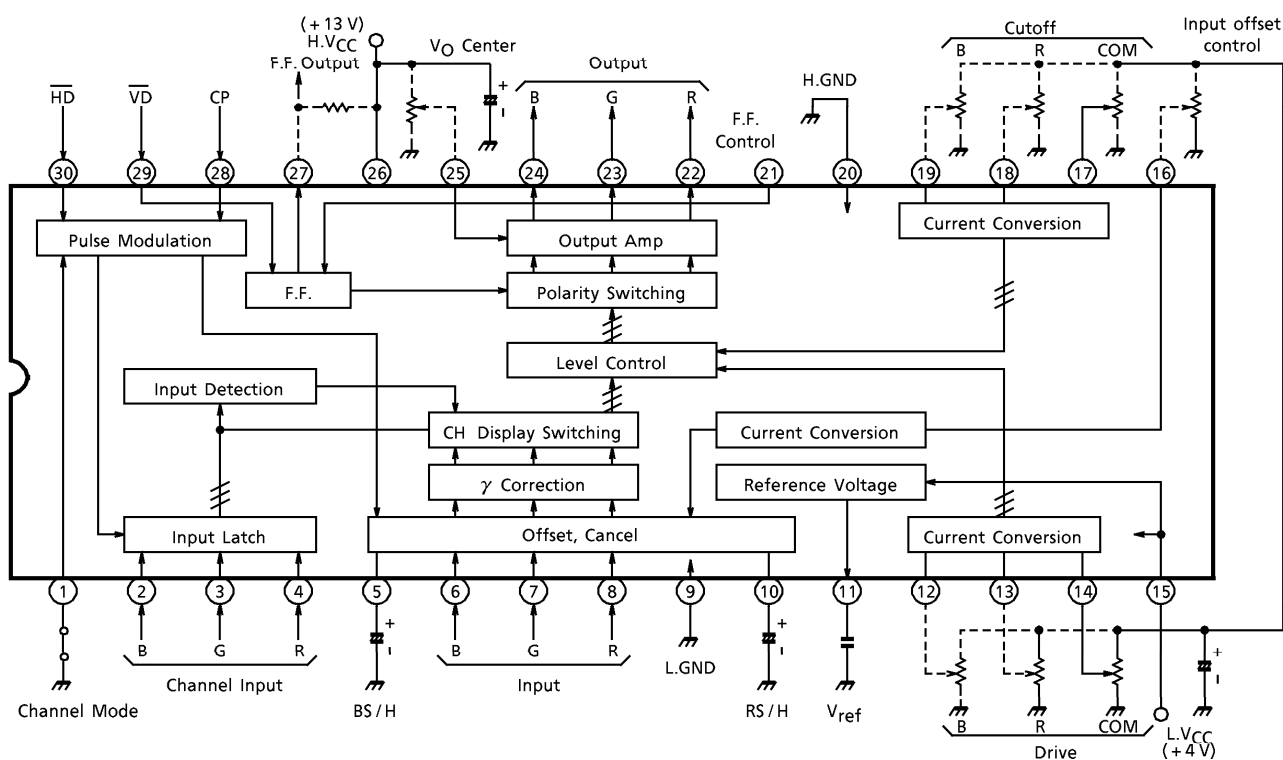





PIN FUNCTION

PIN No.	PIN NAME	REFERENCE VOLTAGE (V)	REFERENCE CURRENT (mA)	FUNCTION
1	Mode Switch	0	0	CH display mode switching (Latch Mode / Through Mode)
2	CH B Input	0	0	CH display signal blue input
3	CH G Input	0	0	CH display signal green input
4	CH R Input	0	0	CH display signal red input
5	BS / H	1.6	0	Blue input signal sample and hold capacitor
6	B Input	1.6	0	Blue primary color input
7	G Input	1.6	0	Green primary color input
8	R Input	1.6	0	Red primary color input
9	L.GND	0	- 8.1	Low-voltage signal GND
10	RS / H	1.6	0	Red input signal sample and hold capacitor
11	V _{ref}	1.6	0	Internal reference voltage
12	B Drive	2	0	B-axis drive control
13	R Drive	2	0	R-axis drive control
14	COM Drive	2	0	Common drive control
15	L.V _{CC}	4.0	8.1	Low-voltage signal V _{CC}
16	γ Offset	2	0	γ correction starting point control
17	COM Cut-off	2	0	Common cut-off control
18	R Cut-off	2	0	R-axis cut-off control
19	B Cut-off	2	0	B-axis cut-off control
20	H.GND	0	- 4.6	High-voltage signal
21	F.F. CONT.	1.4	—	—
22	R Output	6.5	0	Red signal input
23	G Output	6.5	0	Green signal input
24	B Output	6.5	0	Blue signal input
25	V _O Center	6.5	0	Signal output center voltage control
26	H.V _{CC}	13.0	4.6	High-voltage signal V _{CC}
27	F.F. Output	0.2	0	Flip-flop output
28	CP	0.9	0	Clamp pulse input
29	VD	1.4	0	Vertical drive pulse input
30	HD	0.9	0	Horizontal drive pulse input

(Note) : Reference voltage and reference current are for DC bias with no signal.
The current which flows into the IC considered to be positive current.

PACKAGE DIMENSIONS
SSOP30-P-375-1.00

Unit : mm

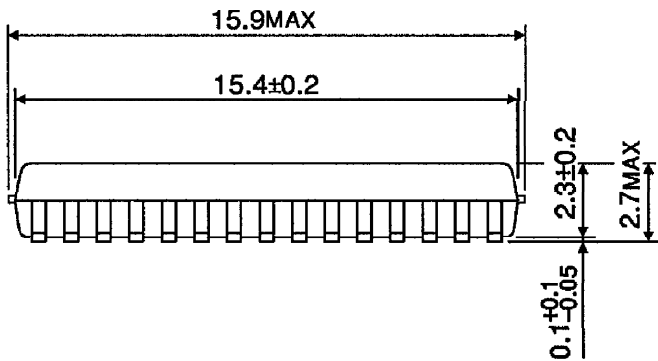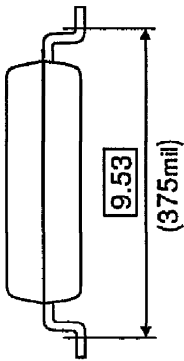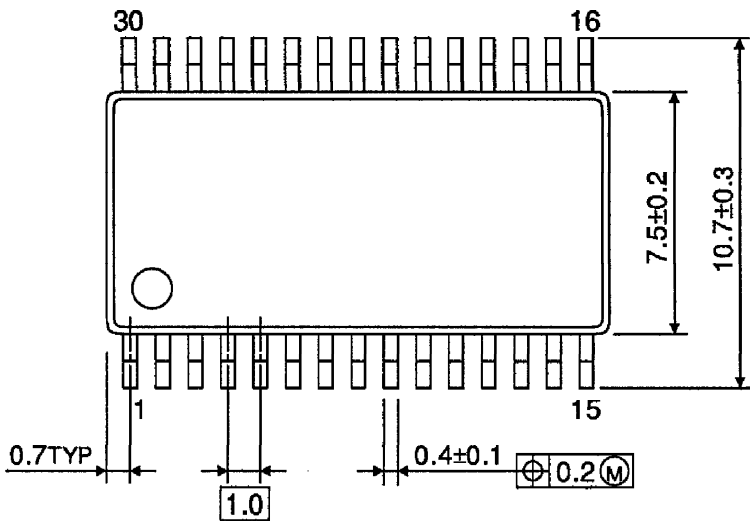

Weight : 0.63 g (Typ.)