


REMARK:

CONTROL RANGE TABLE				
	MIN.	MAX.	CENTER	
CONT.	2.8U	4.0U		
BRI.	0.9U	2.4U		
SAT	2.1U	3.3U		
HUE	1.5U	3.9U	2.8U	

	A0	A1	A2
PCF8581	7b	8a	9b
PCF8582	7a	8b	9b

SCHEMATIC NOTES:

1. RESISTANCE IS SHOWN IN OHMS  $R=1.000$   
 $M=1.000.000$
2. CAPACITANCE IS SHOWN IN  $\mu F$   $nF$   $pF$   
T TANTALUM CAPACITOR  
M FILM CAPACITOR
3. STANDARD FILM RESISTOR (SFR25)
4. VOLTAGE READ WITH DIGITAL VOLTMETER FROM POINT INDICATED TO CHASSIS GROUND USING A NORMAL PICTURE
5. VOLTAGE READINGS SHOWN ARE NORMAL VALUES AND MAY VARY  $\pm 20\%$  (EXCEPT H.V.)
6. SCHEMATIC SUBJECT TO CHANGE WITHOUT NOTICE

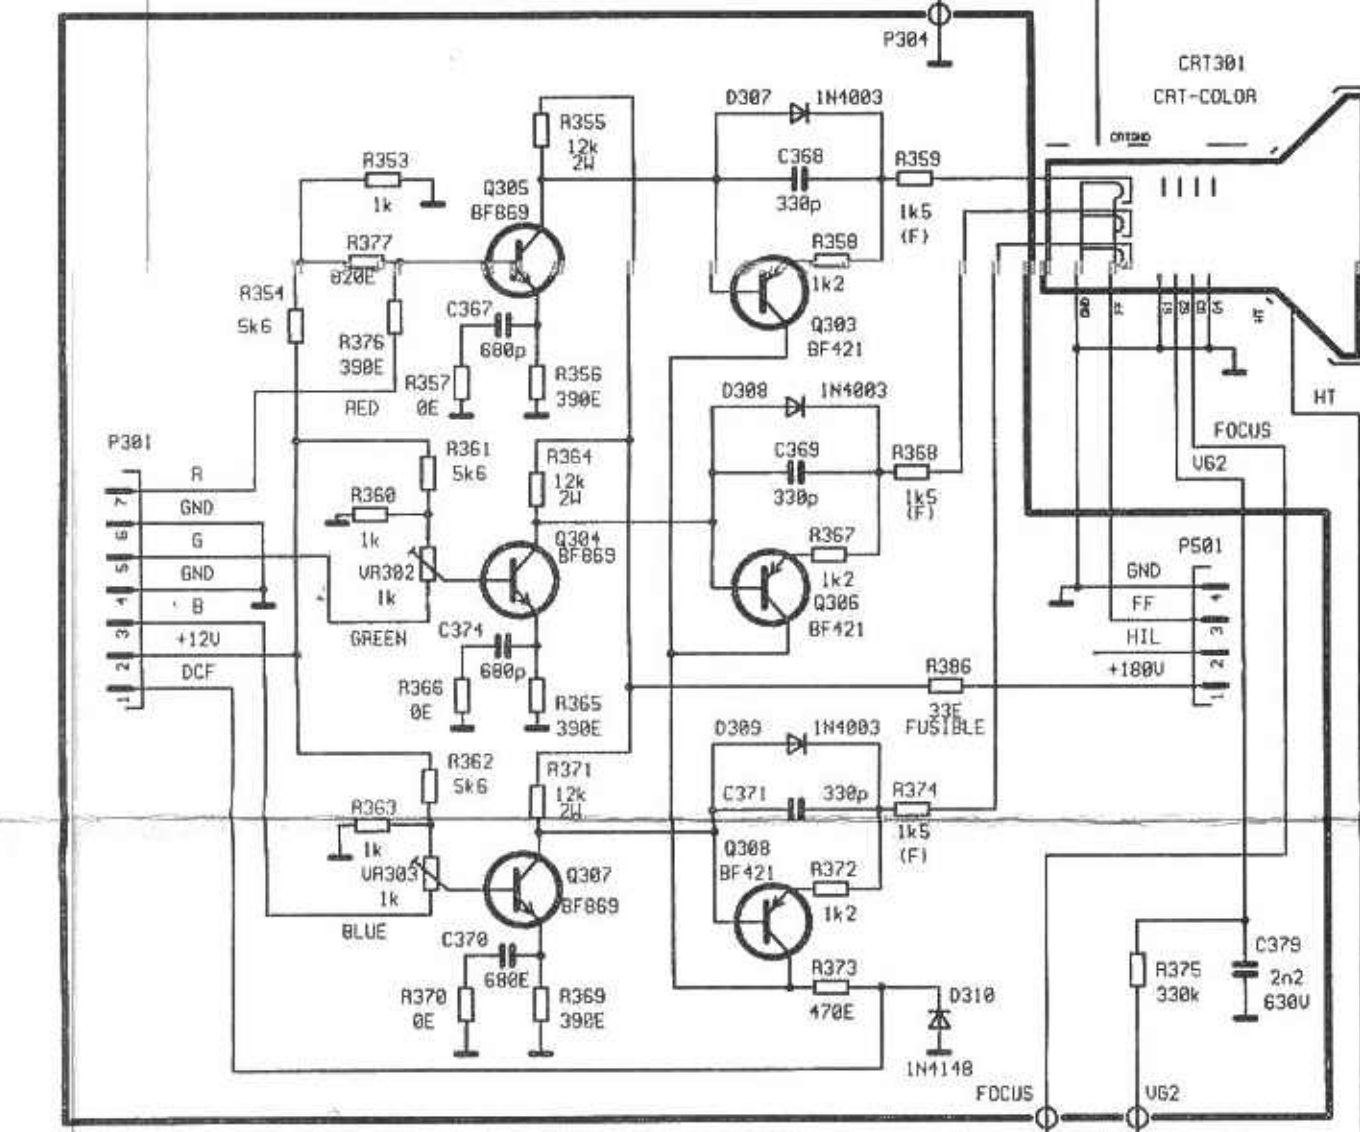

IC101			
TUNING STEP DELAY	PIN16	PIN17	
40 ms	OFF	ON	
52 ms	OFF	OFF	
61 ms	ON	OFF	
83 ms	ON	ON	

"OFF - OPTION DIODE ABSENT"  
"ON - OPTION DIODE PRESENT"

# AXXION SCHEMAT IDEOWY OTVC 20", 21" RC4020, RC4120, RC4021