



SCHEMATIC DIAGRAM CHASSIS : P69SA-1(01)

COLOR TELEVISION RECEIVER
CHASSIS : P69SA1 & RM135-1, SUPER BOMB (OPTION)
MODEL : CK5035TR1BW




MODEL : CK3383ZR1BW
CK5083ZR1BW

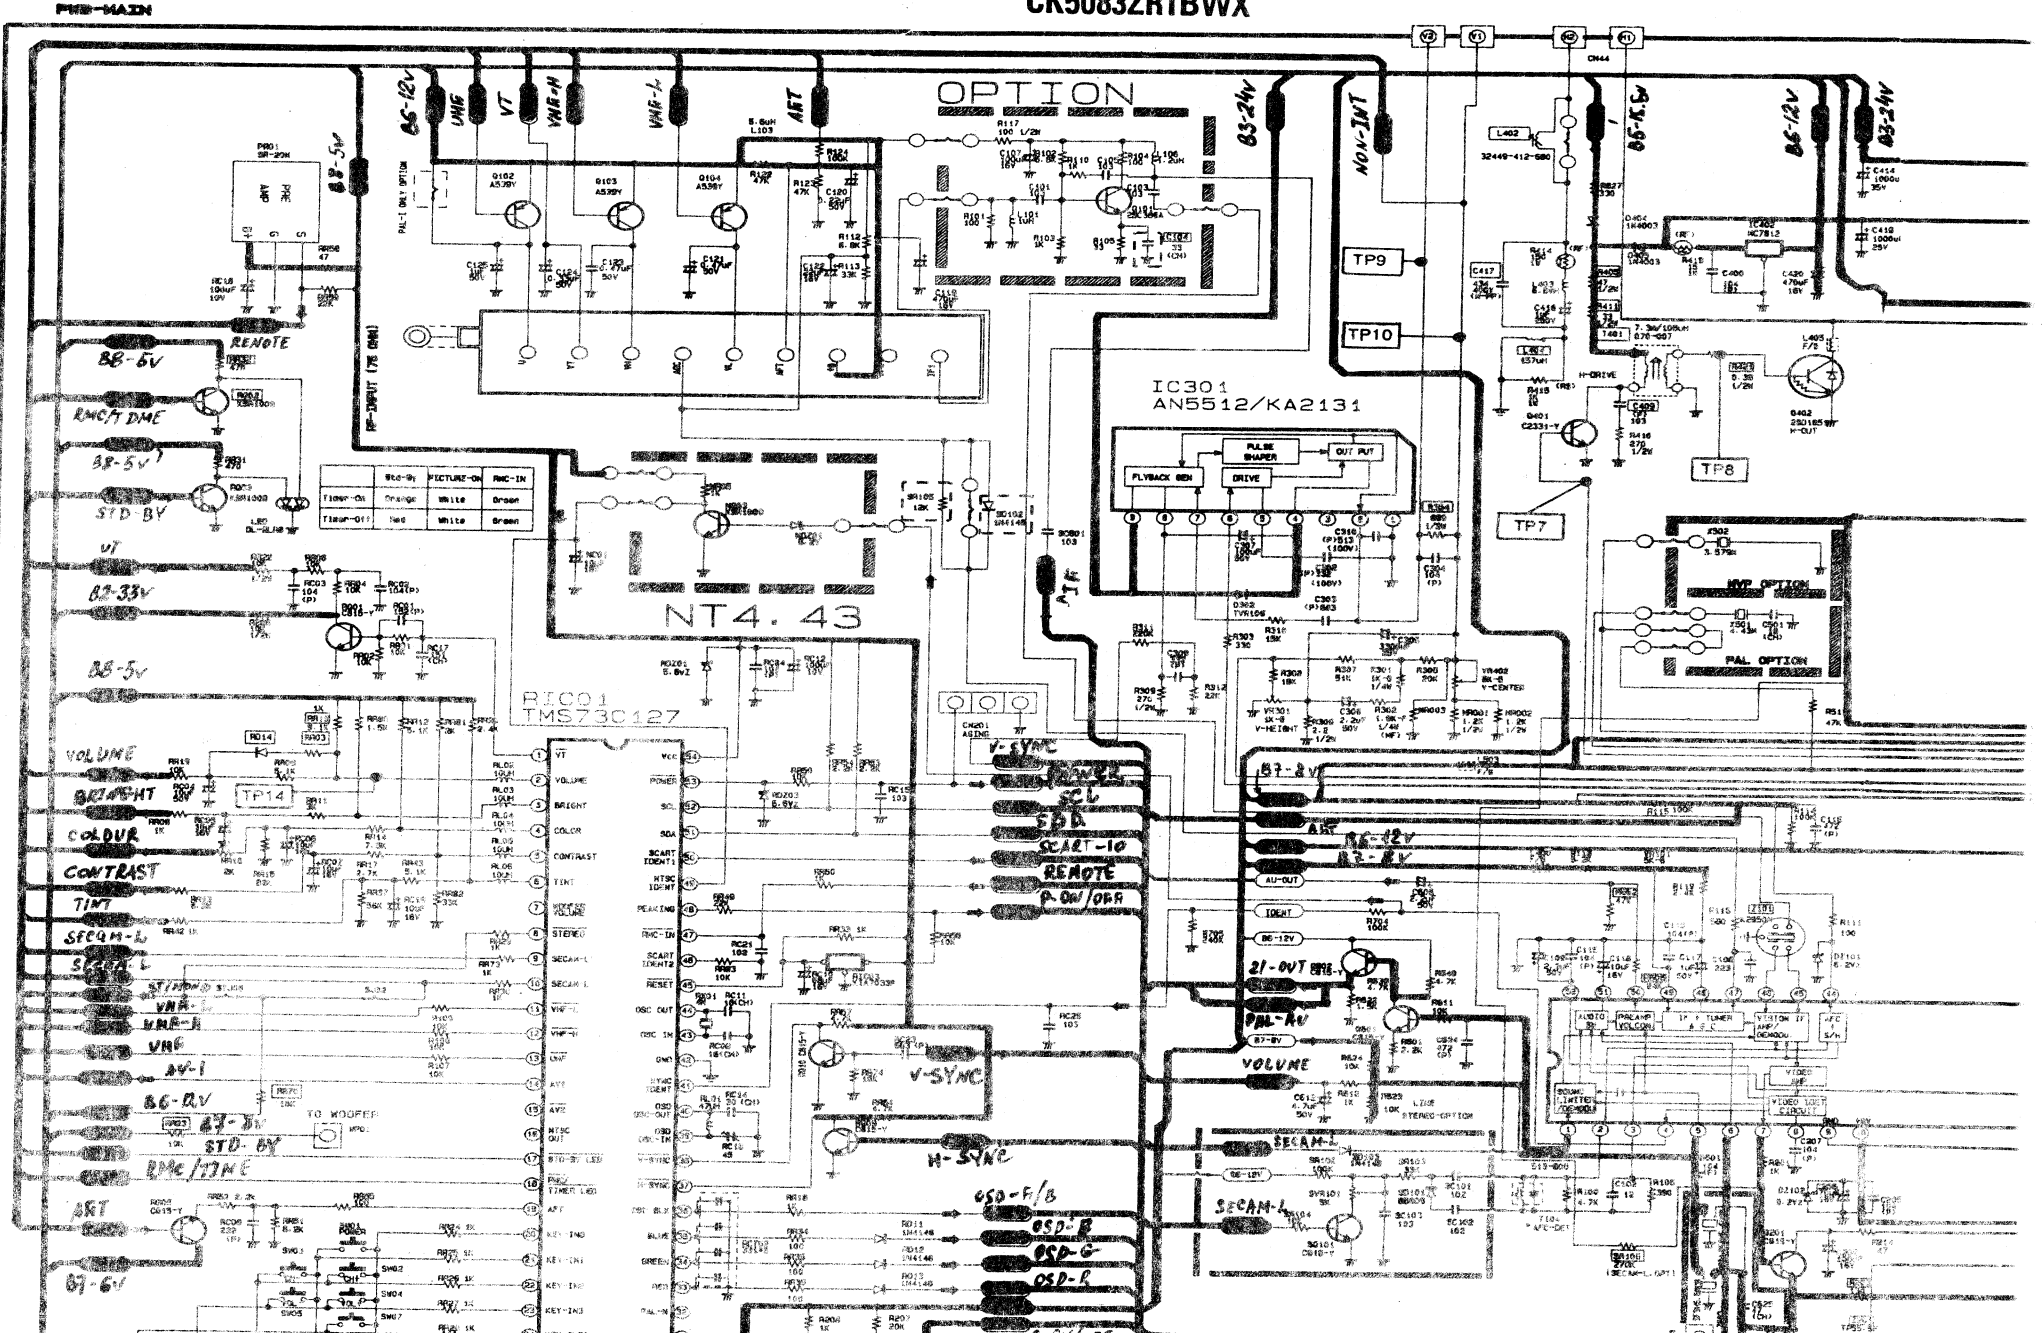

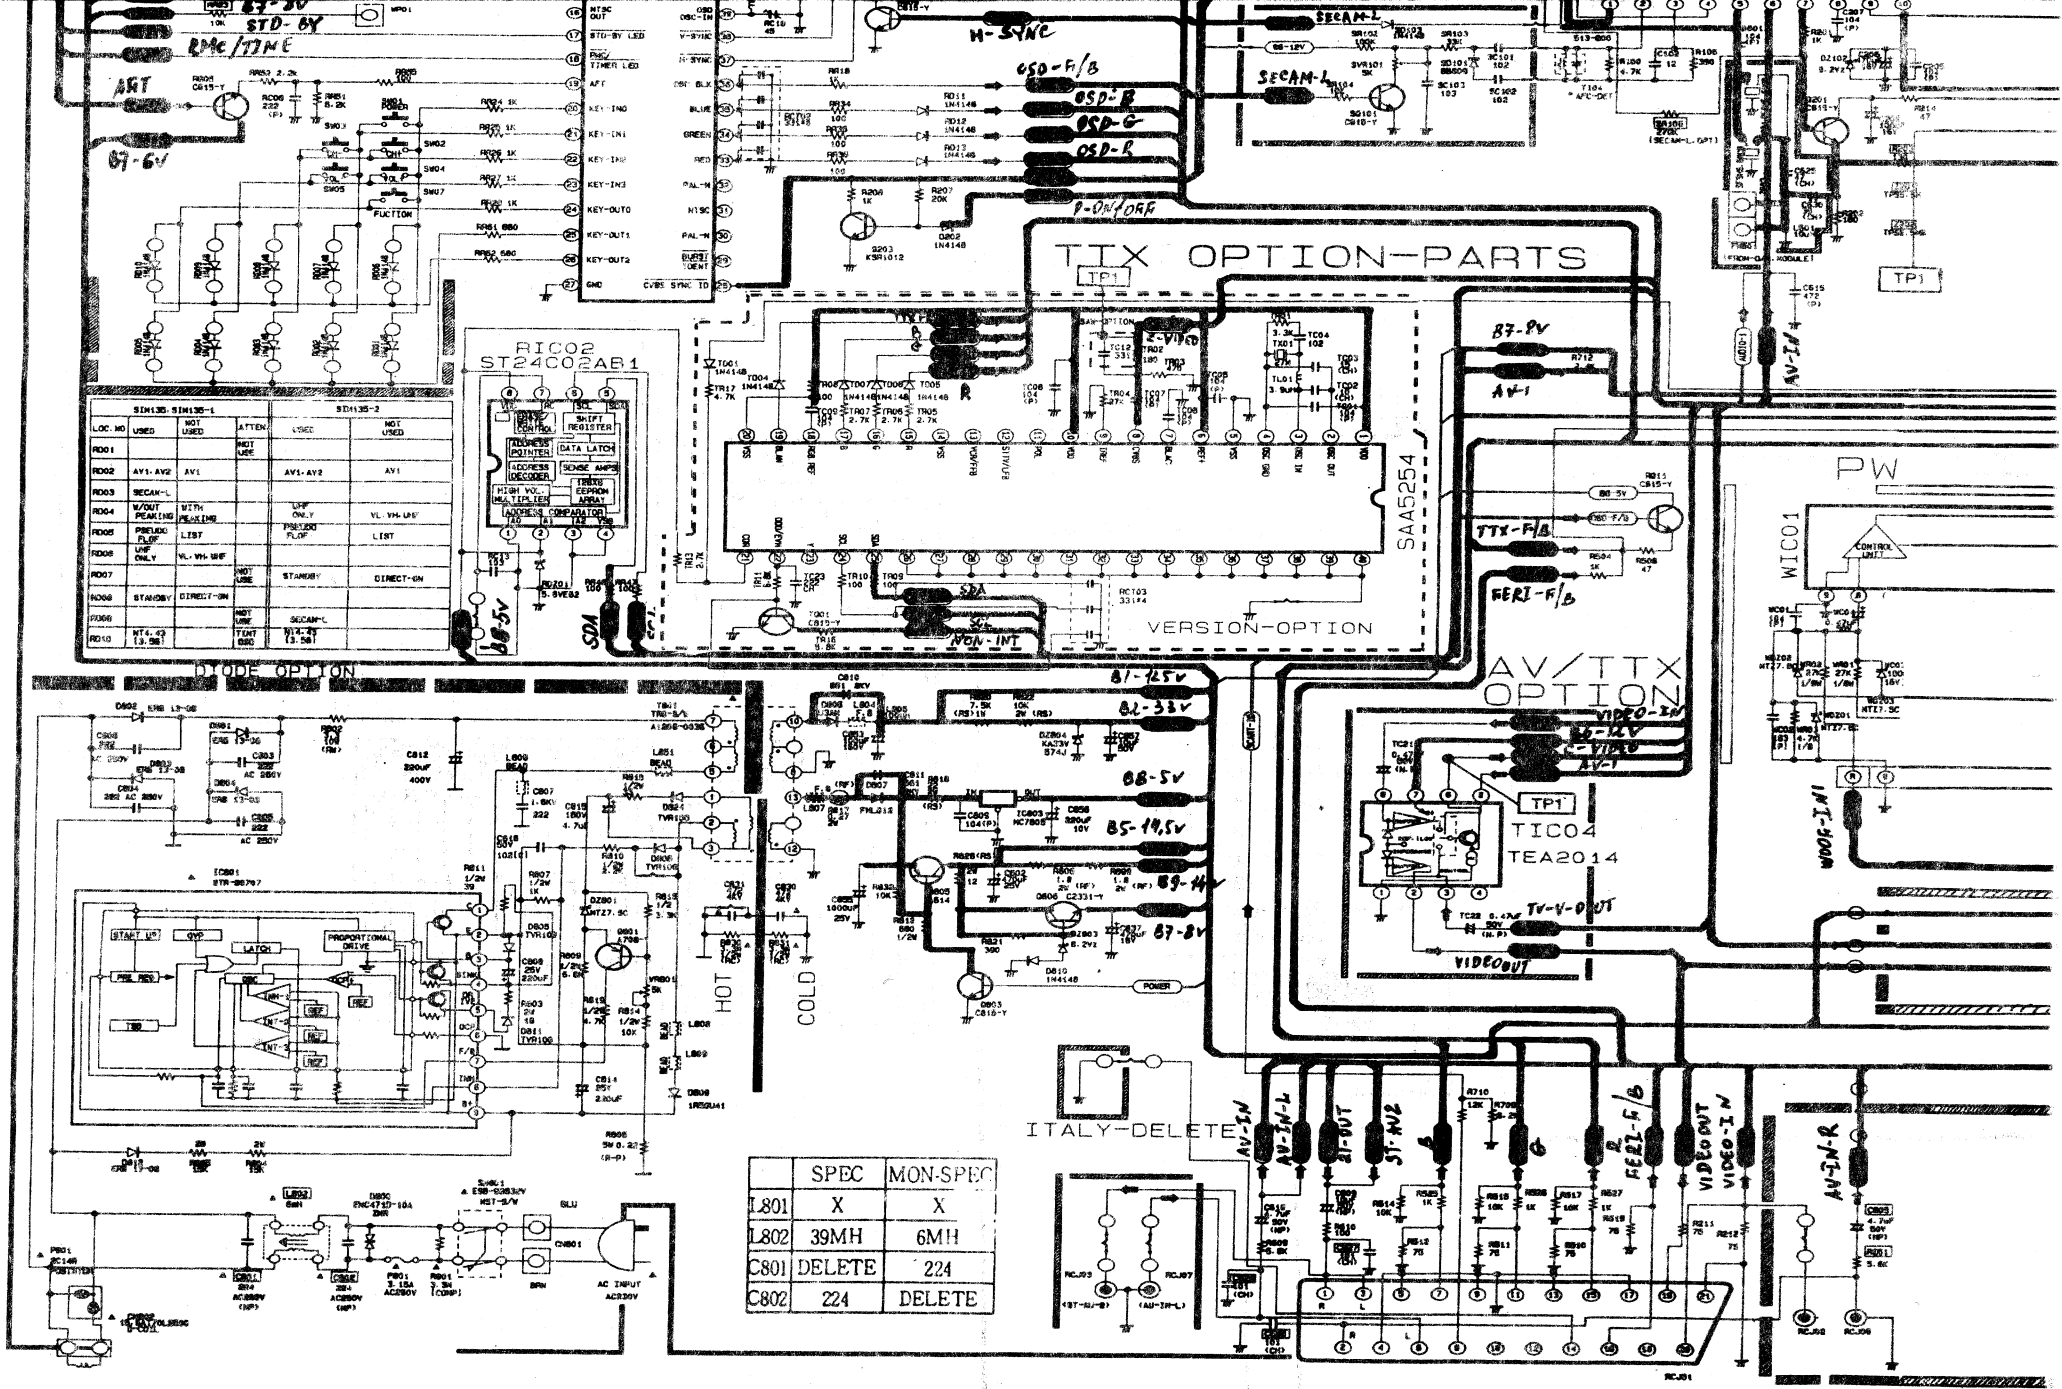

SD1130-1		SD1130-2	
LOC. NO	USED	NOT USED	ATTEN.
R001		AV1-AV2	AV1
R002		AV1-AV2	AV1
R003		SECAM-L	
R004		WITH PEAKING	VL-VH-LVF
R005		FLIP LIST	FLIP LIST
R006		FLIP ONLY	VL-VH-LVF
R007		STANDBY	DIRECT-ON
R008		STANDBY	DIRECT-ON
R009		NT 4.43	NT 4.43
R010		NT 5.25	NT 5.25

	SPEC	MON-SPEC
L801	X	X
L802	39MH	6MH
C801	DELETE	224
C802	224	DELETE

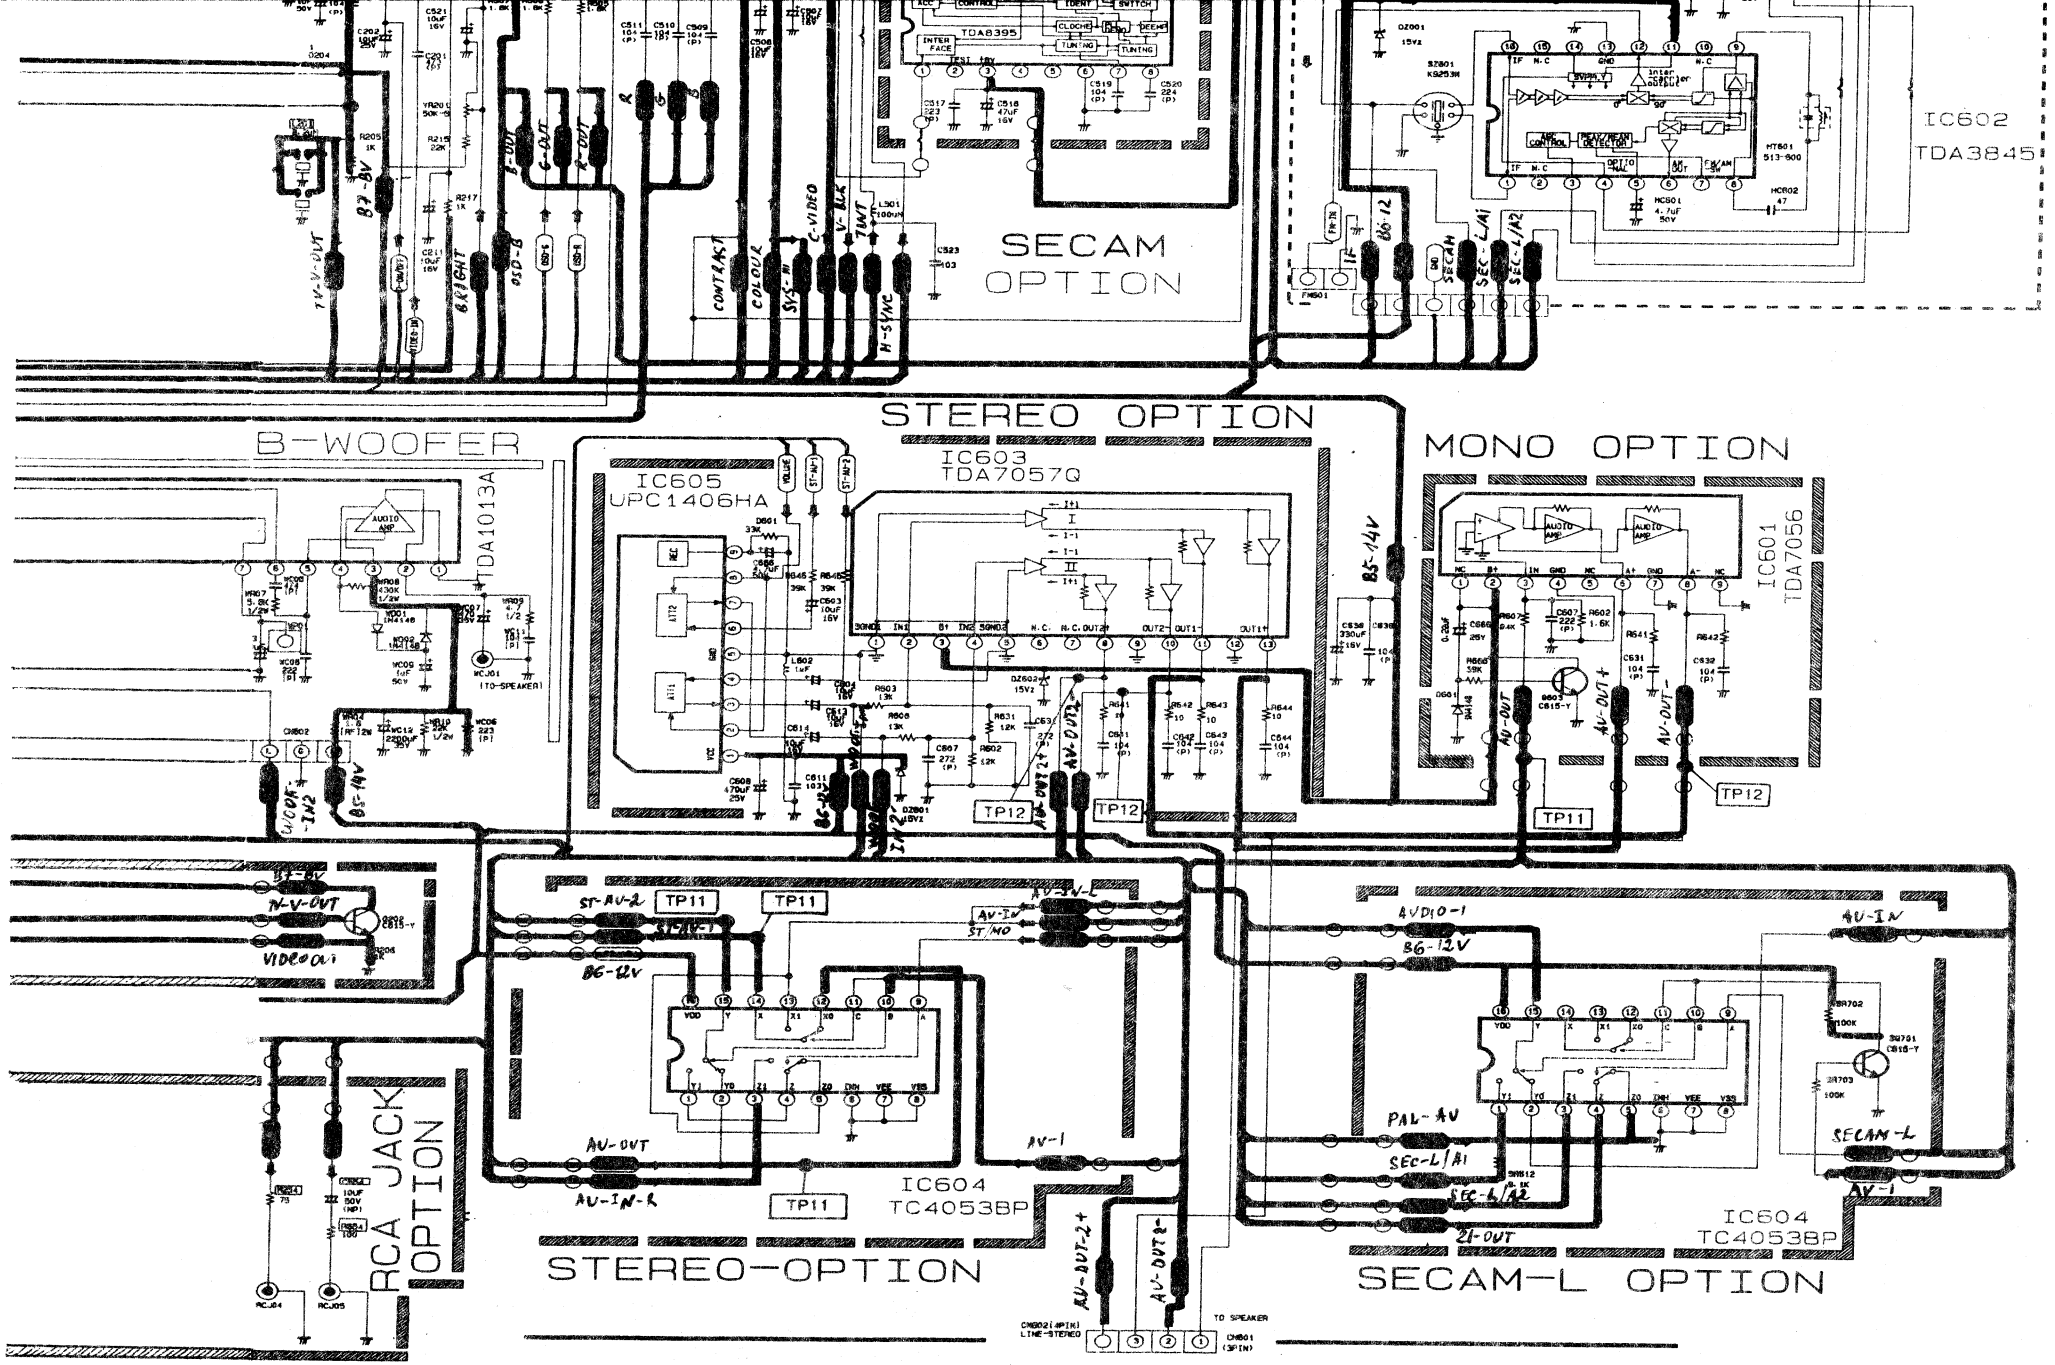

— SIGNAL LINE
 - - - POWER LINE

DIFERENTIAL PARTS FOR FUNCTION

140PP-40PPOSITE

	AV-IN/OUT (TV-OUT-MONO)	LINE-STEREO (MONITOR-OUT)
IC601	TD47056	DELETE
IC603	DELETE	TD470570
IC605	DELETE	UPC14069A
IC604	DELETE	TC40538P
C666	C-ELEC. 25V 2.22UF	C-ELEC. 50V 4.7UF (OPP)
D601	DIODE 1N4148	1/8T 39K-J
R608	1/8T 39K-J	JUMPER
R603	TR CB15-Y	DELETE
C606	C-ELEC. 50V 2.2UF	DELETE
R607	1/8T 24K-J	DELETE
C604	DELETE	C-ELEC. 16V 10UF
C603	DELETE	C-ELEC. 16V 10UF
C614	DELETE	C-ELEC. 16V 10UF
C613	DELETE	C-ELEC. 16V 10UF
R608	DELETE	1/8T 13K-J
R603	DELETE	1/8T 13K-J
R631	DELETE	1/8T 12K-J
C631	DELETE	C-POLY 63V 272
D2602	DELETE	DIODE-ZENER MT215C
D2601	DELETE	DIODE-ZENER MT215C
C608	DELETE	C-ELEC. 25V 470UF
C611	DELETE	C-CERA 50V 103
R643	DELETE	1/8T 10-J
R644	DELETE	1/8T 10-J
C643	DELETE	C-POLY 63V 104
C644	DELETE	C-POLY 63V 104
C6601	POST-3PIN	DELETE
C6603	DELETE	POST-4PIN
C6602	DELETE	POST-5PIN (FOR WOOKER)
R623	DELETE	1/8T 10K-J
R624	DELETE	1/8T 10K-J
C612	DELETE	C-ELEC. 50V 4.7UF
RR29	DELETE	1/8T 1K-J
RR16	1/8T 1K-J	1/8T 5.1K-J
R661	DELETE	1/8T 5.6K-J
C605	DELETE	C-ELEC. 50V 4.7UF (NP)
C654	DELETE	C-ELEC. 50V 10UF (NP)
R611	1/8T 10K-J	DELETE
R601	1/8T 2.2K-J	DELETE
R639	1/8T 4.7K-J	DELETE
R640	1/8T 4.7K-J	DELETE
D601	TR CB15-Y	DELETE
R602	TR CB15-Y	DELETE
R622	1/8T 1.5K-J	DELETE
RR70	DELETE	1/8T 10K-J
R602	DELETE	1/8T 12K-J
R645	DELETE	1/8T 39K-J

	AV-IN/OUT (TV-OUT-MONO)	LINE-STEREO (MONITOR-OUT)
R646	DELETE	1/8T 39K-J
RC04	C-ELEC. 50V 2.2UF	C-ELEC. 50V 10UF
R662	DELETE	1/8T 47K-J
R605	1/8T 1K-J	1/8T 24K-J
STJ21	JUMPER (8362750SHRT)	DELETE
J139	JUMPER (8362750LONG)	DELETE
STJ200	JUMPER (405312)	DELETE
STJ07	DELETE	JUMPER (405313)
R607	DELETE	1/8T 24K-J
C604	DELETE	JUMPER (AU-IN-L)
STJ11	DELETE	JUMPER (405314)
STJ16	DELETE	JUMPER (11408A12.8)
STJ10	DELETE	JUMPER (405312)
STJ12	DELETE	C-ELEC. (405313)
STJ19	DELETE	JUMPER (405315)
STJ09	DELETE	JUMPER (405314)
STJ25	DELETE	JUMPER (405311)
J360	DELETE	JUMPER (11408A18)
J161	DELETE	JUMPER (405315)
J148	DELETE	JUMPER (405310.111)
J601	DELETE	JUMPER (11408A18)
J147	JUMPER (705612)	DELETE
J361	JUMPER (705616)	DELETE
STJ01	DELETE	JUMPER (405313)
J128	DELETE	JUMPER (8062EWITTER)
STJ06	DELETE	JUMPER (405315)
STJ04	DELETE	JUMPER (AU-IN-R)
J130	DELETE	JUMPER (AU-IN-L)
J130B	JUMPER (AU-IN)	DELETE
STJ03	DELETE	JUMPER (AU-OUT-L)
STJ15	DELETE	JUMPER (AU-OUT-L)
STJ05	DELETE	JUMPER (AU-IN-R)
J121	DELETE	JUMPER (21PIN 2-6)
J271	DELETE	JUMPER (11408A12.8)
J150	DELETE	JUMPER (J271 PATTERN)
J149	JUMPER (J150 PATTERN)	DELETE
J143	JUMPER (J149 PATTERN)	DELETE
J209	JUMPER (836211)	DELETE
J206	JUMPER (836216)	DELETE
R666	DELETE	JUMPER (705711)
RCJ01	JACK-2PIN	DELETE
RCJ02	JACK-BLOCK-2PIN	JACK-BLOCK-8PIN

	TELETEXT	W/O-TELETEXT
RC103	C-NETWORK 33174	DELETE
RD01	DIODE 1N4148	DELETE
RD05	DIODE 1N4148 (OPTIION)	DELETE
TC01	C-POLY 63V 104	DELETE
TC02	C-CERA 50V CH 100-J	DELETE
TC03	C-CERA 50V CH 150-J	DELETE
TC04	C-CERA 50V 102-K	DELETE
TC05	C-POLY 63V 104-J	DELETE
TC06	C-POLY 63V 104-J	DELETE
TC07	C-POLY 63V 104-J	DELETE
TC08	C-POLY 63V 104-J	DELETE
TC09	C-POLY 63V 104-J	DELETE
TC12 (CB-CX)	C-CERA 50V 331-J	DELETE
TC12 (CK-CK)	C-CERA 50V RM 181-J	DELETE
TD01	DIODE 1N4148	DELETE
TD04	DIODE 1N4148	DELETE
TD05	DIODE 1N4148	DELETE
TD06	DIODE 1N4148	DELETE
TD07	DIODE 1N4148	DELETE
TI001	SAAS254P/E	DELETE
TI001	SAAS254P/H	DELETE
TI001	SAAS254P/T	DELETE
TL01	COIL 13.9UH	DELETE
TR01	TR CB15-Y	DELETE
TR01	1/8T 3.3K	DELETE
TR02	1/8T 180	DELETE
TR03	1/8T 470	DELETE
TR04	1/8T 27K	DELETE
TR05	1/8T 2.7K	DELETE
TR06	1/8T 2.7K	DELETE
TR07	1/8T 2.7K	DELETE
TR08	1/8T 100	DELETE
TR09	1/8T 100	DELETE
TR10	1/8T 100	DELETE
TR11	1/8T 5.9K	DELETE
TR13	1/8T 2.7K	DELETE
TR16	1/8T 6.8K	DELETE
TR17	1/8T 4.7K	DELETE
TX01	X-TAL 27MHz (PHILIPS)	DELETE
TC23	C-CERA 50V 222-2	DELETE

	LINE-STEREO (MONITOR-OUT)	SECAM-L/L
IC601	DELETE	IC-TD47056
IC603	TD470570	DELETE
IC605	UPC14069A	DELETE
R654	1/8T 100-J	DELETE
C666	C-ELEC. 50V 4.7UF (OPP)	C-ELEC. 25V 0.22UF
D601	1/8T 39K-J	DIODE 1N4148
R666	JUMPER	1-8T 39K-J
R603	DELETE	TR CB15-Y
C606	DELETE	C-ELEC. 50V 2.2UF
R607	DELETE	1/8T 24K-J
C604	C-ELEC. 16V 10UF	DELETE
C603	C-ELEC. 16V 10UF	DELETE
C614	C-ELEC. 16V 10UF	DELETE
C613	C-ELEC. 16V 10UF	DELETE
R608	DELETE	1/8T 13K-J
R603	1/8T 13K-J	DELETE
R631	1/8T 12K-J	DELETE
C631	C-POLY 63V 272	DELETE
D2602	DIODE-ZENER MT215C	DELETE
C608	C-ELEC. 25V 470UF	DELETE
C611	C-CERA 50V 103	DELETE
R643	1/8T 10-J	DELETE
R644	1/8T 10-J	DELETE
C643	C-POLY 63V 104	DELETE
C644	C-POLY 63V 104	DELETE
C6601	DELETE	POST-3PIN
C6603	DELETE	POST-4PIN
C6602	DELETE	POST-5PIN (FOR WOOKER)
R623	DELETE	1/8T 10K-J
R624	DELETE	1/8T 10K-J
C612	DELETE	C-ELEC. 50V 4.7UF
RR29	DELETE	1/8T 1K-J
RR16	1/8T 9.1K-J	1/8T 1K-J
R661	1/8T 5.6K-J	1/8T 6.2K-J
C605	C-ELEC. 50V 10UF (NP)	DELETE
C654	C-ELEC. 50V 10UF (NP)	DELETE
R611	DELETE	1/8T 10K-J
R601	DELETE	1/8T 2.2K-J
R639	DELETE	1/8T 4.7K-J
R640	DELETE	1/8T 4.7K-J
D601	DELETE	TR CB15-Y
R602	DELETE	TR CB15-Y
R622	DELETE	1/8T 1.5K-J
RR70	1/8T 10K-J	1/8T 5.6K-J
R602	1/8T 12K-J	1/8T 1.6K-J
R645	1/8T 39K-J	DELETE

	LINE-STEREO (MONITOR-OUT)	SECAM-L/L
R646	1/8T 39K-J	DELETE
R669	DELETE	DELETE
R606	DELETE	DELETE
R662	1/8T 47K-J	DELETE
R605	1/8T 24K-J	1/8T 1K-J
MODULE	3039-00001-260	3039-00001-260
RR73	DELETE	1/8T 100-J
RR30	DELETE	1/8T 1K-J
R708	DELETE	1/8T 10K-J
SR104	DELETE	1/8T 10K-J
SR702	DELETE	1/8T 10K-J
SR101	DELETE	1/8T 100K-J
SR102	DELETE	1/8T 100K-J
SR105	DELETE	1/8T 12K-J
SR103	DELETE	1/8T 33K-J
SR703	DELETE	1/8T 51K-J
R609	1/8T 5.6K-J	1/8T 6.2K-J
SR612	DELETE	1/8T 9.1K-J
SVR101	DELETE	VR-90K
C615	C-POLY 63V 472	C-CERA 50V 471-K
SC101	DELETE	C-CERA 50V 102
SC102	DELETE	C-CERA 50V 102
SC103	DELETE	C-CERA 50V 103
C124	C-ELEC 50V 0.33UF	C-ELEC 50V 1UF
C117	C-ELEC 50V 1UF	C-ELEC 50V 4.7UF
***	DELETE	C-ELEC 50V 22UF (NP)
C609	C-ELEC 50V 10UF (NP)	C-ELEC 25V 22UF (NP)
C706	DELETE	C-ELEC 50V 10UF (NP)
S0701	DELETE	TR CB15-Y
S0101	DELETE	TR CB15-Y
S0103	DELETE	DIODE 1N4148
RD03	DELETE	DIODE 1N4148
S0102	DELETE	DIODE 1N4148
S0101	DELETE	VARIABLE 00009
IC101	TD48362B	TD48362
STJ21	JUMPER (8362750SHRT)	DELETE
J139	DELETE	JUMPER (8362750LONG)
STJ200	JUMPER (405312)	DELETE
STJ07	JUMPER (405313)	DELETE
STJ11	JUMPER (405314)	DELETE
STJ16	JUMPER (11408A12.8)	DELETE
STJ10	JUMPER (405312)	DELETE
STJ12	DELETE	C-ELEC. (405313)
STJ19	DELETE	JUMPER (405315)
STJ09	DELETE	JUMPER (405314)
STJ25	DELETE	JUMPER (405311)
J360	DELETE	JUMPER (11408A18)
J161	DELETE	JUMPER (405315)
J148	DELETE	JUMPER (405310.111)
J601	DELETE	JUMPER (11408A18)
J147	JUMPER (705612)	DELETE
J361	JUMPER (705616)	DELETE
STJ01	DELETE	JUMPER (405313)
J128	DELETE	JUMPER (8062EWITTER)
STJ06	DELETE	JUMPER (405315)
STJ04	DELETE	JUMPER (AU-IN-R)
J130	DELETE	JUMPER (AU-IN-L)
J130B	JUMPER (AU-IN)	DELETE
STJ03	DELETE	JUMPER (AU-OUT-L)
STJ15	DELETE	JUMPER (AU-OUT-L)
STJ05	DELETE	JUMPER (AU-IN-R)
J121	DELETE	JUMPER (21PIN 2-6)
J271	DELETE	JUMPER (11408A12.8)
J150	DELETE	JUMPER (J271 PATTERN)
J149	JUMPER (J150 PATTERN)	DELETE
J143	JUMPER (J149 PATTERN)	DELETE
J209	JUMPER (836211)	DELETE
J206	JUMPER (836216)	DELETE
R666	DELETE	JUMPER (705711)
RCJ01	JACK-2PIN	DELETE
RCJ02	JACK-BLOCK-2PIN	JACK-BLOCK-8PIN

	LINE-STEREO (MONITOR-OUT)	SECAM-L/L
STJ01	JUMPER (405313)	DELETE
STJ06	JUMPER (405315)	DELETE
STJ04	JUMPER (AU-IN-R)	DELETE
STJ03	JUMPER (AU-OUT-L)	DELETE
STJ15	JUMPER (AU-OUT-L)	DELETE
STJ05	JUMPER (AU-IN-R)	DELETE
J121	DELETE	JUMPER (21PIN 2/4)
J271	JUMPER (11408A12.8)	DELETE
J150	JUMPER (J271 PAT.)	DELETE
J149	DELETE	JUMPER (J150 PAT.)
J143	DELETE	JUMPER (J149 PAT.)
J209	DELETE	JUMPER (836211)
J208	DELETE	JUMPER (836216)
J666	DELETE	JUMPER (7057011)
SJ09	DELETE	JUMPER (405314)
STJ20	DELETE	JUMPER (405312.12)
SJ02	DELETE	JUMPER (HICOM F10)
STJ01D	DELETE	JUMPER (10602 EMITTER)
RCJ01	DELETE	JACK-PERI
RCJ02	JACK-6PIN	DELETE

	DELETE	JUMPER (405310)
J148	DELETE	JUMPER (405310)
STJ20	DELETE	JUMPER (405312)
SJ02	DELETE	JUMPER (HICOM F10)
STJ01D	DELETE	JUMPER (10602 EMITTER)
J166	DELETE	JUMPER (AU-DH-L)
J461	DELETE	JUMPER (405318)

DIFERENTIAL PARTS FOR CRT

	14INCH-SED	14INCH-PHILIPS	20INCH-SED	20INCH-WF	21INCH-SED
CRT	A34K042X	A34EAC1X06	A48K0R22X	A48EOR11X16	A51KTR23X-1R A51KJL23X-1.7R
R925	R-FUSE:2T 1.0-J	R-FUSE:2T 1.0-J	R-FUSE:1T 1.0-J	R-FUSE:1T 1.0-J	R-FUSE:1T 1.0-J
R924	R-FUSE:1T 0.47-J	R-FUSE:1T 1.0-J	R-FUSE:1T 1.0-J	R-FUSE:1T 1.0-J	R-FUSE:1T 1.0-J
C417	C-M.POLY:400V 354	C-M.POLY:400V 364	C-M.POLY:400V 434	C-M.POLY:400V 434	C-M.POLY:400V 434
R213	R-CAR: 1/8T 2K-J	R-CAR: 1/8T 2K-J	R-CAR: 1/8T 3.3K-J	R-CAR: 1/8T 3.3K-J	R-CAR: 1/8T 3.3K-J
G402	25D1650 25D1711	25D1650 25D1711	KSL 1072YD	KS05072YD	KSD5072YD
T444	FTK14A004P	FTK14A004P	FOH2A*15	FOH2A015	FOH2A015
L404	32449-730-010	32449-730-010	32446-J5-040	32446-705-040	32446-705-040
CN602	32479-029-380	32479-029-380	A1149-0111.FREEVOLT A1149-0113.220VOLT	A1149-0011.FREEVOLT A1149-0012.220VOLT	A1149-0010.FREEVOLT A1149-0012.220VOLT
C411	C-FILM:1.6KV 632	C-FILM:1.6KV 722	C-FI 1.1.6KV 632	C-FILM:1.6KV 722	C-FILM:1.6KV 632
C415	C-CERA:2KV 681	C-CERA:2KV 331	DELETE	C-CERA:2KV 331	C-CERA:2KV 331
R501	R-CAR: 1/8T 3.6K-J	R-CAR: 1/8T 3.6K-J	R-CAR: 1/8T 5.6K-J	R-CAR: 1/8T 5.6K-J	R-CAR: 1/8T 3.3K-J
C409	C-POLY:63V 103	C-POLY:63V 103	C-POLY:63V 822	C-POLY:63V 822	C-POLY:63V 822
Y999	A3047-0013(WITH)	A3047-0013(WITH)	A3047-0010(HIBI)	A3047-0010(HIBI)	A3047-0010(HIBI)
L402	JUMPER WIDTH-COLL:412-650	JUMPER WIDTH-COLL:412-650	JUMPER	WIDTH-COLL:412-680	WIDTH-COLL:412-680
R411	R-CAR: 1/2T 10-J	R-CAR: 1/2T 10-J	R-CAR: 1/2T 33-J	R-CAR: 1/2T 33-J	R-CAR: 1/2T 33-J
R304	R-CAR: 1/2T 600-J	R-CAR: 1/2T 330-J	R-CAR: 1/2T 330-J	R-CAR: 1/2T 600-J	R-CAR: 1/2T 330-J
R421	JUMPER	JUMPER	R-CAR: 1/2T 0.39-J	R-CAR: 1/2T 0.39-J	R-CAR: 1/2T 0.39-J
R405	R-CAR: 1/2T 12-J	R-CAR: 1/2T 12-J	R-CAR: 1/2T 47-J	R-CAR: 1/2T 47-J	R-CAR: 1/2T 47-J
R312	R-CAR: 1/8T 33K-J	R-CAR: 1/8T 33K-J	R-CAR: 1/8T 22K-J	R-CAR: 1/8T 22K-J</	