


## WIRING

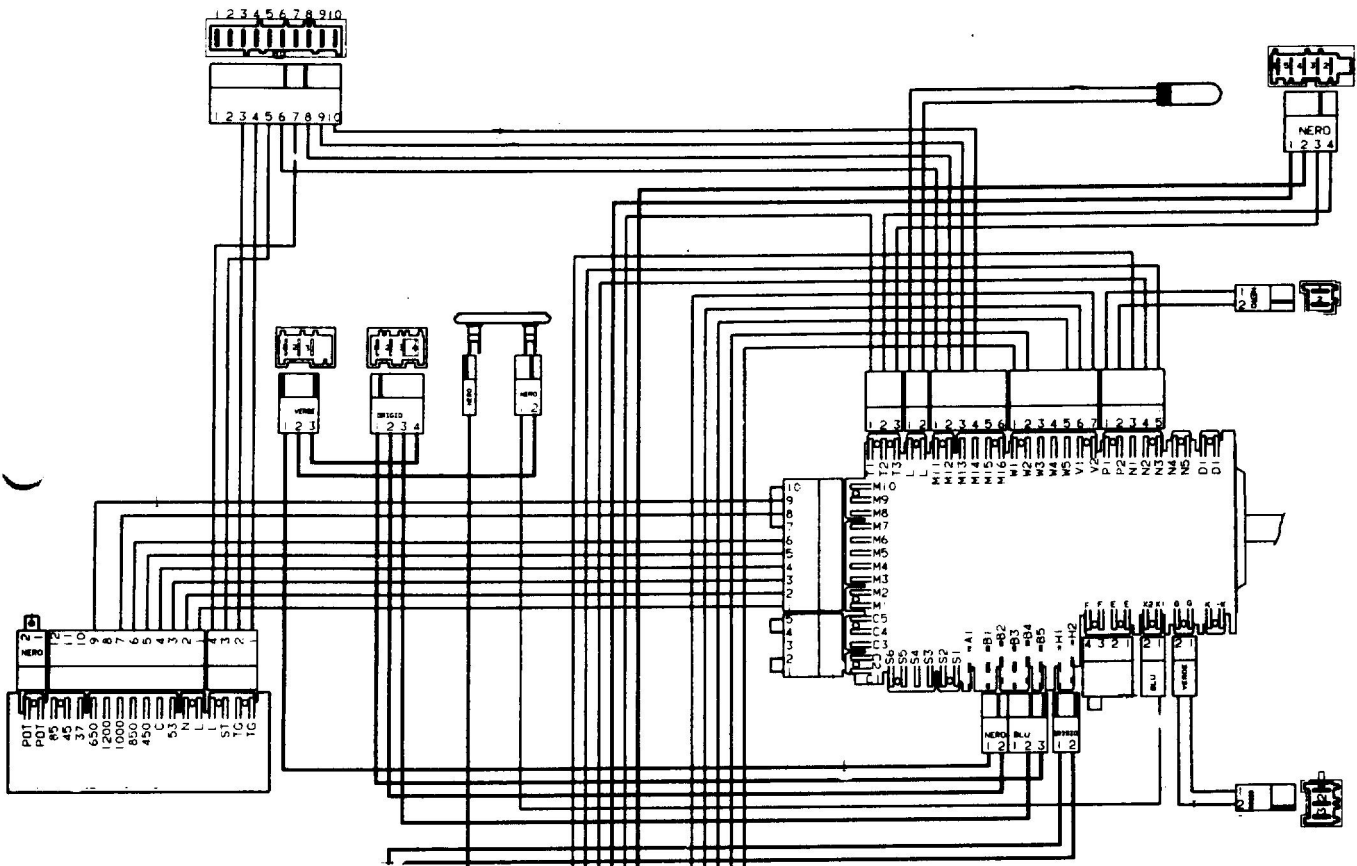

### GENERAL FEATURES

Connection between the various components is provided by wiring modules including terminal connections.

Terminal connectors, having a number of contacts ranging from 2 to 12, are of two types:- one for connecting printed circuit boards, the other for connecting components having tag-type terminals.

The technique adopted to connect the wiring leads to the connector contacts is that of the wire-insulation piercing type.

To prevent erroneous connections said connectors are biased.

### EFFICIENCY CHECK

1. Check, with the aid of an ohm-meter, continuity between the corresponding connector terminals.
2. Always check connectors are plugged-in properly so as to avoid the possible presence of false contacts.