



THIS SPECIFICATION IS THE PROPERTY OF BOE BJ AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF BOE BJ AND MUST BE RETURNED TO BOE BJ UPON ITS REQUEST

SPEC. NUMBER

PRODUCT GROUP

Rev.

ISSUE DATE

PAGE

TFT-LCD

P0

2016.04.30

1 OF 36

# NT156WHM-N50

## Preliminary Product Specification

Rev. P0

Chongqing BOE OPTOELECTRONICS TECHNOLOGY CO.,LTD



<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	P0	2014.04.30
SPEC. NUMBER	SPEC. TITLE NT156WHM-N50 Preliminary Product Specification		PAGE 3 OF 36

## Contents

No.	Items	Page
	REVISION HISTORY	2
	CONTENTS	3
1.0	General Description	4
2.0	Absolute Maximum ratings	6
3.0	Electrical specifications.	7
4.0	Optical specifications.	10
5.0	Interface Connection	15
6.0	Signal Timing waveforms	19
7.0	Signal Timing waveforms of interface signal	21
8.0	Input signals, Basic display colors & gray scale of colors	23
9.0	Power sequence	24
10.0	Connector description	25
11.0	Mechanical Characteristics	26
12.0	Reliability Test	27
13.0	Handling & Cautions.	27
14.0	Label	28
15.0	Packing information	28
16.0	Mechanical Outline Dimension	31
17.0	EDID Table	33


<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	P0	2014.04.30
SPEC. NUMBER	SPEC. TITLE	PAGE	
	NT156WHM-N50 Preliminary Product Specification	4 OF 36	

## 1.0 GENERAL DESCRIPTION

### 1.1 Introduction

NT156WHM-N50 is a color active matrix TFT LCD module using amorphous silicon TFT's (Thin Film Transistors) as an active switching devices. This module has a 15.6 inch diagonally measured active area with HD resolutions (1366 horizontal by 768 vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical Stripe and this module can display 262,144 colors. The TFT-LCD panel used for this module is a low reflection and higher color type. Therefore, this module is suitable for Notebook PC. The LED Driver for back-light driving is built in this model.

All input signals are LVDS interface compatible.

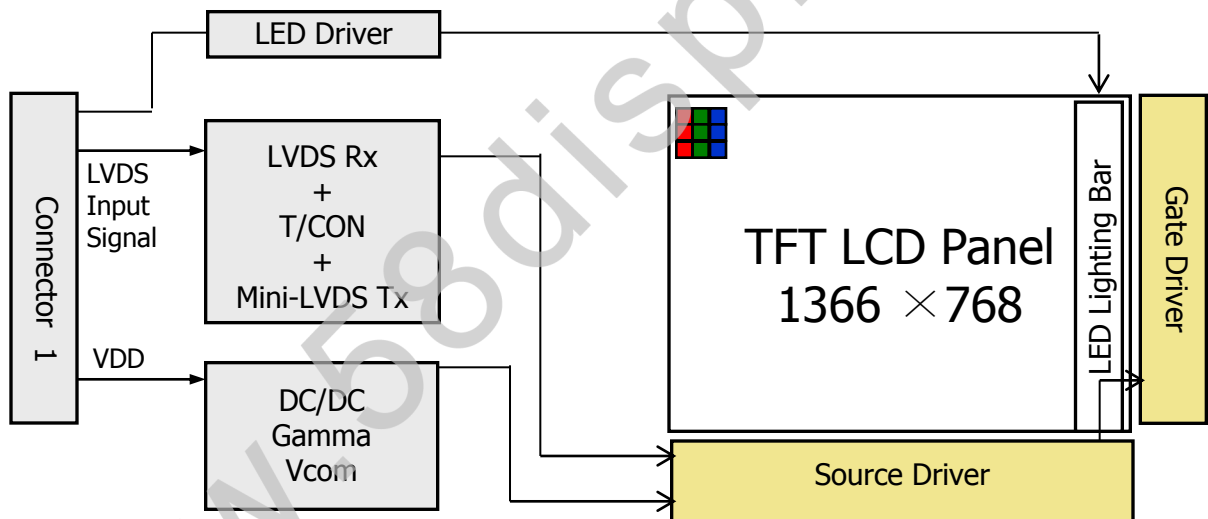

### 1.2 Features

- 1 Channel LVDS Interface with 1 pixel / clock
- Thin and light weight
- 6-bit color depth, display 262K colors
- Single LED Lighting Bar. (Down side/Horizontal Direction)
- Data enable signal mode
- Up/Down Mounting Frame
- Green Product (RoHS & Halogen free product)
- On board LED Driving circuit
- Low driving voltage and low power consumption
- On board EDID chip

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	P0	2014.04.30
SPEC. NUMBER	SPEC. TITLE	PAGE	
	NT156WHM-N50 Preliminary Product Specification	5 OF 36	

### 1.3 Application

- Notebook PC (Wide type)

### 1.4 General Specification

The followings are general specifications at the model NT156WHM-N50. (listed in Table 1.)

<Table 1. General Specifications>

Parameter	Specification	Unit	Remarks
Active area	344.23(H) × 193.54(V)	mm	
Number of pixels	1366 (H) × 768 (V)	pixels	
Pixel pitch	0.252 (H) X 0.252 (V)	mm	
Pixel arrangement	RGB Vertical stripe		
Display colors	262K	colors	
Display mode	Normally White		
Dimensional outline	359.32(H)*209.54(V) (W/PCB)*5.5(Max)	mm	
Weight	450 (max)	g	
Surface treatment	Glare		
Back-light	Lower Down side, 1-LED Lighting Bar type		Note 1
Power consumption	P <sub>D</sub> : 1.2 (max)	W	
	P <sub>B/L</sub> :2.3(max)	W	
	P <sub>total</sub> :3.5(max)	W	

Notes : 1. LED Lighting Bar (27\*LED Array)

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	P0	2014.04.30
SPEC. NUMBER	SPEC. TITLE	PAGE	
	NT156WHM-N50 Preliminary Product Specification	6 OF 36	


## 2.0 ABSOLUTE MAXIMUM RATINGS

The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 2.

< Table 2. Absolute Maximum Ratings >  $T_a=25\pm 2^\circ\text{C}$

Parameter	Symbol	Min.	Max.	Unit	Remarks
Power Supply Voltage	$V_{DD}$	-0.3	4.0	V	Note 1
Logic Supply Voltage	$V_{IN}$	$V_{SS}-0.3$	$V_{DD}+0.3$	V	
Operating Temperature	$T_{OP}$	0	+50	$^\circ\text{C}$	Note 2
Storage Temperature	$T_{ST}$	-20	+60	$^\circ\text{C}$	

- Notes : 1. Permanent damage to the device may occur if maximum values are exceeded functional operation should be restricted to the condition described under normal operating conditions.
2. Temperature and relative humidity range are shown in the figure below.  
 95 % RH Max. ( $40^\circ\text{C} \geq T_a$ )  
 Maximum wet - bulb temperature at  $39^\circ\text{C}$  or less. ( $T_a > 40^\circ\text{C}$ ) No condensation.

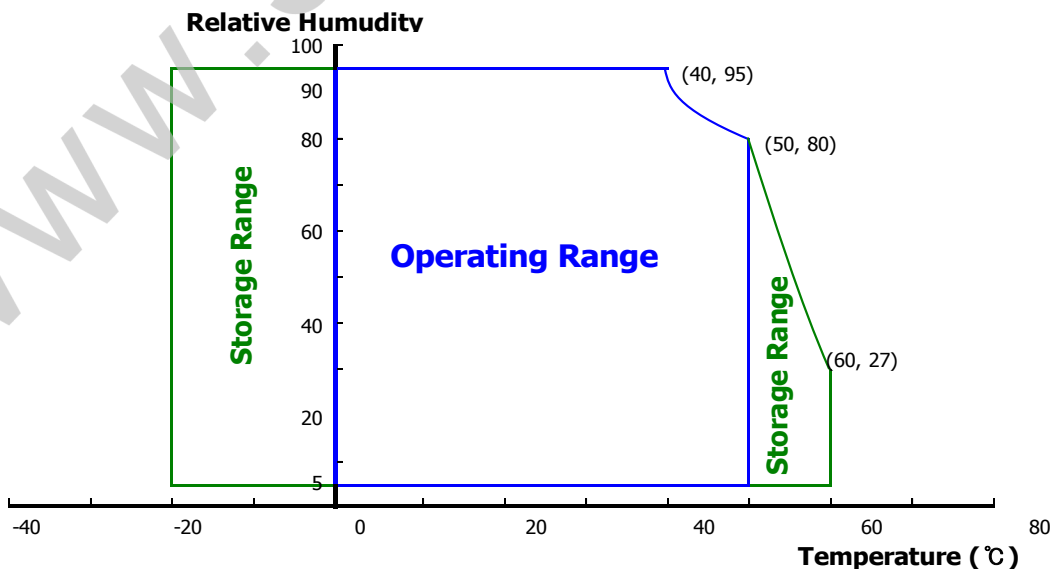

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	P0	2014.04.30
SPEC. NUMBER	SPEC. TITLE	PAGE	
	NT156WHM-N50 Preliminary Product Specification	7 OF 36	

### 3.0 ELECTRICAL SPECIFICATIONS

#### 3.1 Electrical Specifications

< Table 3. Electrical specifications >

Ta=25+/-2°C



Parameter		Min.	Typ.	Max.	Unit	Remarks
Power Supply Voltage	V <sub>DD</sub>	3.0	3.3	3.6	V	Note 1
Permissible Input Ripple Voltage	V <sub>RF</sub>	-	-	100	mV	At V <sub>DD</sub> = 3.3V
Power Supply Current	I <sub>DD</sub>	-	300	-	mA	Note 1
Inrush Current	I <sub>inrush</sub>	-	569	700	mA	
Differential Input Voltage	V <sub>ID</sub>	100	-	600	mV	
Power Consumption	P <sub>D</sub>	-	0.9	1.2	W	Note 1
	P <sub>BL</sub>	-	-	2.3	W	Note 2
	P <sub>total</sub>	-	-	3.5	W	
LVDS Common Mode Voltage	V <sub>IC</sub>	0.7	-	1.6	V	

Notes : 1. The supply voltage is measured and specified at the interface connector of LCM.  
The current draw and power consumption specified is for 3.3V at 25°C.

- a) Typ : Mosaic Pattern
- b) Max : Skip sub pixel255

2. Calculated value for reference (V<sub>LED</sub> × I<sub>LED</sub>)

#### ▣ Inrush current测试方法

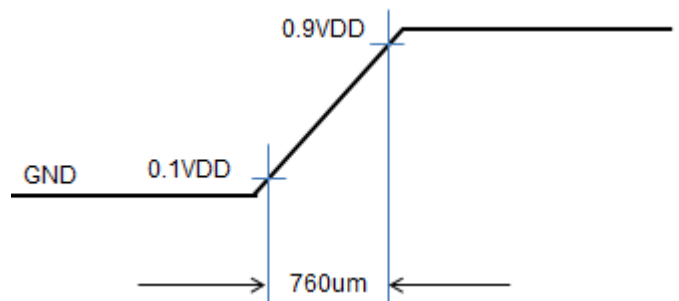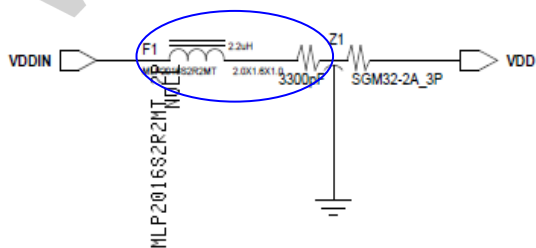

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	P0	2014.04.30
SPEC. NUMBER	SPEC. TITLE	PAGE	
	NT156WHM-N50 Preliminary Product Specification	8 OF 36	

**3.2 Backlight Unit**

&lt; Table 4. LED Driving guideline specifications &gt;

Ta=25+/-2°C

Parameter		Min.	Typ.	Max.	Unit	Remarks
LED Forward Voltage	$V_F$	-	-	3.2	V	-
LED Forward Current	$I_F$	-	22.5	-	mA	-
LED Power Consumption	$P_{LED}$		-	2.3	W	Note 1
LED Life-Time	N/A	15,000	-	-	Hour	$I_F = 20mA$
Power supply voltage for LED Driver	$V_{LED}$	5	12	21	V	
LED Power Input Current	$I_{LED IN}$	-	192	-	mA	
LVDS Common Mode Voltage	$V_{core}$	0.7	1.2	1.6	V	
Maximum deviation of input clock frequency during SSC	$F_{DEV}$	-	$\pm 3\%$	-		
Maximum modulation frequency of input clock during SSC	$F_{MOD}$	10	-	300	KHZ	
EN Control Level	Backlight on	2.5		5.0	V	
	Backlight off	0		1.0	V	
PWM Control Level	PWM High Level	2.5		5.0	V	
	PWM Low Level	0		0.1	V	
PWM Control Frequency	$F_{PWM}$	100	-	10,000	Hz	
Duty Ratio	-	1	-	100	%	Note3

Notes : 1. Power supply voltage 12V for LED Driver

Calculator Value for reference  $I_F \times V_F \times 27 / \text{efficiency} = P_{LED}$ 


2. The LED Life-time define as the estimated time to 50% degradation of initial luminous.

3. 1% duty cycle is achievable with a dimming frequency less than 1KHz. 8



<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT-LCD PRODUCT	P0	2014.04.30
SPEC. NUMBER	SPEC. TITLE		PAGE
	NT156WHM-N50 Preliminary Product Specification		9 OF 36

**3.3 LED structure**

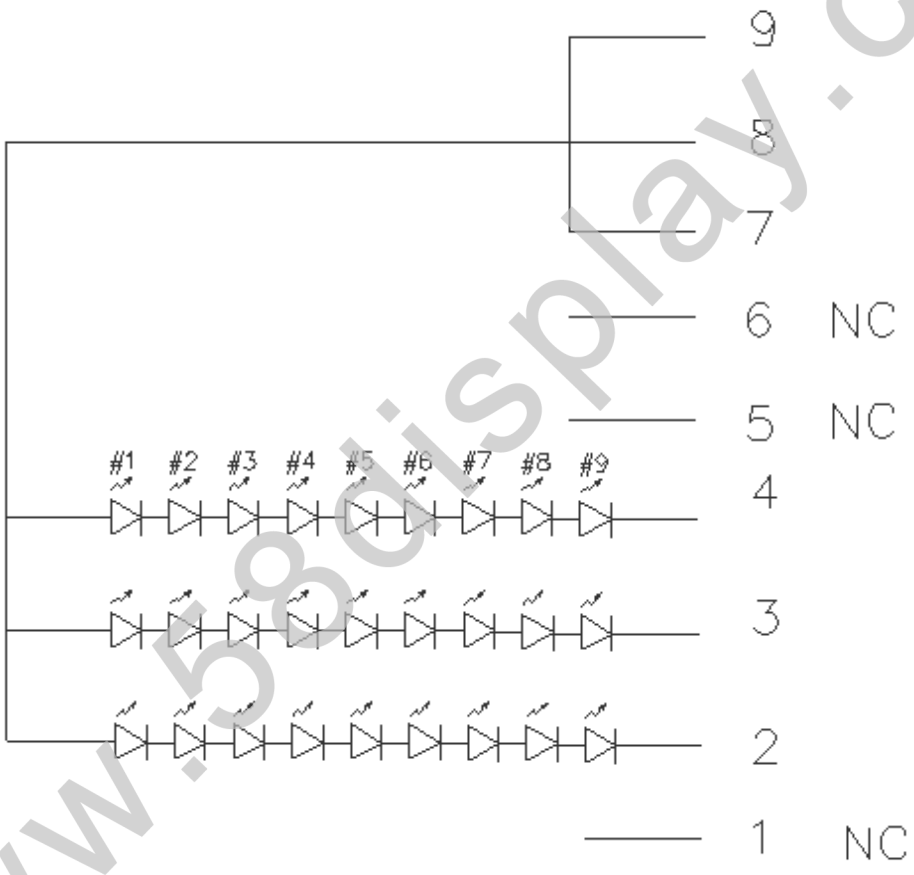

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	P0	2014.04.30
SPEC. NUMBER	SPEC. TITLE	PAGE	
	NT156WHM-N50 Preliminary Product Specification	10 OF 36	

## 4.0 OPTICAL SPECIFICATION

### 4.1 Overview

The test of Optical specifications shall be measured in a dark room (ambient luminance  $\leq 1$  lux and temperature =  $25 \pm 2^\circ\text{C}$ ) with the equipment of Luminance meter system (Goniometer system and TOPCON BM-5) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of  $\theta$  and  $\Phi$  equal to  $0^\circ$ . We refer to  $\theta\Phi=0$  ( $=\theta_3$ ) as the 3 o'clock direction (the "right"),  $\theta\Phi=90$  ( $=\theta_{12}$ ) as the 12 o'clock direction ("upward"),  $\theta\Phi=180$  ( $=\theta_9$ ) as the 9 o'clock direction ("left") and  $\theta\Phi=270$  ( $=\theta_6$ ) as the 6 o'clock direction ("bottom"). While scanning  $\theta$  and/or  $\Phi$ , the center of the measuring spot on the Display surface shall stay fixed. The backlight should be operating for 30 minutes prior to measurement. VDD shall be  $3.3 \pm 0.3\text{V}$  at  $25^\circ\text{C}$ . Optimum viewing angle direction is 6 'clock.

### 4.2 Optical Specifications

<Table 5. Optical Specifications>

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Viewing Angle range	Horizontal	$\Theta_3$	CR > 10	-	45	-	Deg.	Note 1
		$\Theta_9$		-	45	-	Deg.	
	Vertical	$\Theta_{12}$		-	20	-	Deg.	
		$\Theta_6$		-	40	-	Deg.	
Luminance Contrast ratio		CR	$\Theta = 0^\circ$	-	500			Note 2
Luminance of White	5 Points	$Y_w$	$\Theta = 0^\circ$ $I_{LED} = 22.5\text{mA}$	187	220	-	cd/m <sup>2</sup>	Note 3
White Luminance uniformity	5 Points	$\Delta Y_5$		80	-	-		Note 4
	13 Points	$\Delta Y_{13}$		65	-	-		
White Chromaticity		$x_w$	$\Theta = 0^\circ$	0.283	0.313	0.343		Note 5
		$y_w$		0.299	0.329	0.359		
Reproduction of color	Red	$x_R$	$\Theta = 0^\circ$	-0.03	0.590	+0.03		
		$y_R$			0.350			
	Green	$x_G$			0.330			
		$y_G$			0.555			
	Blue	$x_B$			0.153			
		$y_B$			0.119			
Gamut					45		%	
Response Time (Rising + Falling)		$T_{RT}$	$T_a = 25^\circ\text{C}$ $\Theta = 0^\circ$	-	12	-	ms	Note 6
Cross Talk		CT	$\Theta = 0^\circ$	-	-	2.0	%	Note 7

<b>BOE</b>	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P0	2014.04.30
SPEC. NUMBER	SPEC. TITLE	PAGE	
	NT156WHM-N50 Preliminary Product Specification	11 OF 36	

## Notes :

1. Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing angles are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface (see FIGURE 1).

2. Contrast measurements shall be made at viewing angle of  $\Theta = 0$  and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state .

(see FIGURE 1) Luminance Contrast Ratio (CR) is defined mathematically.

$$CR = \frac{\text{Luminance when displaying a white raster}}{\text{Luminance when displaying a black raster}}$$

3. Center Luminance of white is defined as luminance values of 5 point average across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in FIGURE 2 for a total of the measurements per display.

4. The White luminance uniformity on LCD surface is then expressed as :  $\Delta Y = \text{Minimum Luminance of 5(or 13) points} / \text{Maximum Luminance of 5(or 13) points}$ .  
(see FIGURE 2 and FIGURE 3).

5. The color chromaticity coordinates specified in Table 5 shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel.


6. The electro-optical response time measurements shall be made as FIGURE 4 by switching the "data" input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is  $T_r$ , and 90% to 10% is  $T_d$ .

7. Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance ( $Y_A$ ) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance ( $Y_B$ ) of that same area when any adjacent area is driven dark.  
(See FIGURE 5).

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	P0	2014.04.30
SPEC. NUMBER	SPEC. TITLE	PAGE	
	NT156WHM-N50 Preliminary Product Specification	12 OF 36	


### 4.3 Optical measurements

**Figure 1. Measurement Set Up**

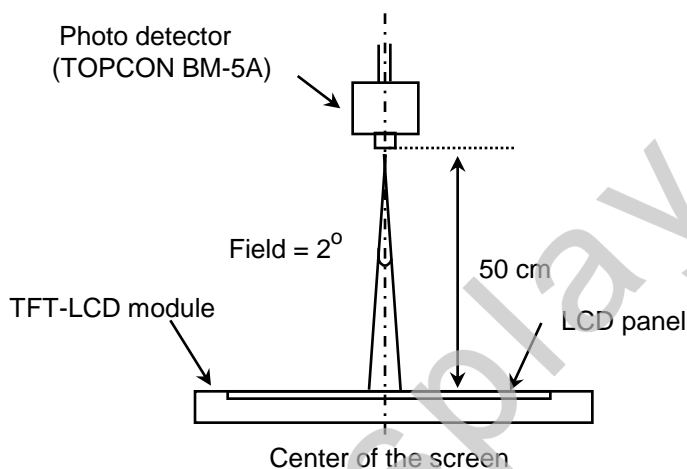

Optical characteristics measurement setup


**Figure 2. White Luminance and Uniformity Measurement Locations (5 points)**

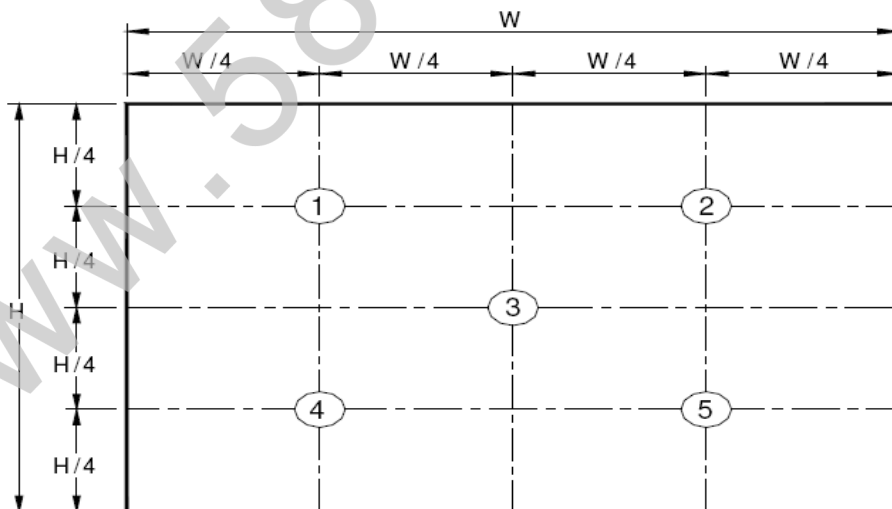

Center Luminance of white is defined as luminance values of center 5 points across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in FIGURE 2 for a total of the measurements per display.


<b>BOE</b>	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P0	2014.04.30
SPEC. NUMBER	SPEC. TITLE	PAGE	
	NT156WHM-N50 Preliminary Product Specification	13 OF 36	

**Figure 3. Uniformity Measurement Locations (13 points)**

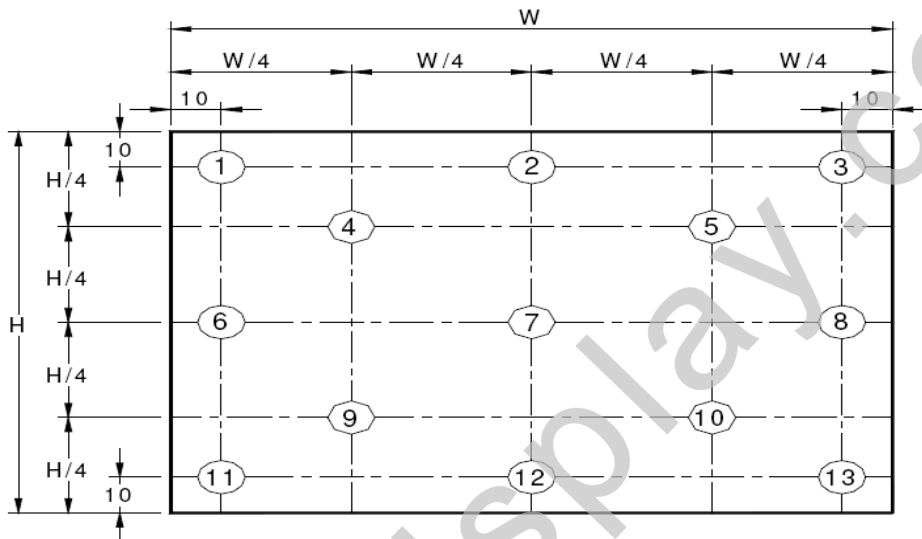

The White luminance uniformity on LCD surface is then expressed as :  $\Delta Y_5 = \text{Minimum Luminance of five points} / \text{Maximum Luminance of five points}$  (see FIGURE 2) ,  $\Delta Y_{13} = \text{Minimum Luminance of 13 points} / \text{Maximum Luminance of 13 points}$  (see FIGURE 3).


**Figure 4. Response Time Testing**

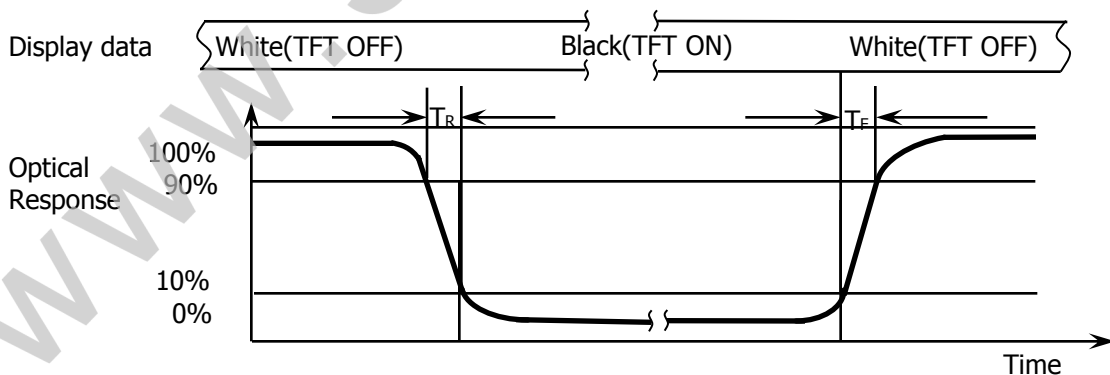

The electro-optical response time measurements shall be made as shown in FIGURE 4 by switching the "data" input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is  $T_d$  and 90% to 10% is  $T_r$ .

<b>BOE</b>	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P0	2014.04.30
SPEC. NUMBER	SPEC. TITLE	PAGE	
	NT156WHM-N50 Preliminary Product Specification	14 OF 36	

**Figure 5. Cross Modulation Test Description**

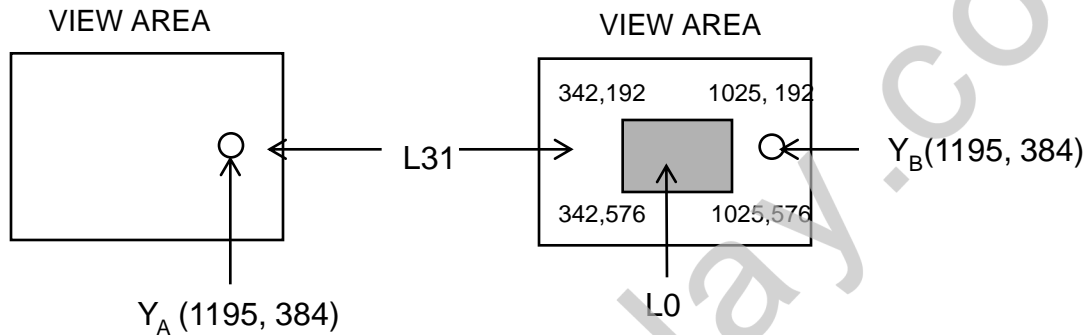

$$\text{Cross-Talk (\%)} = \left| \frac{Y_B - Y_A}{Y_A} \right| \times 100$$

Where:

$Y_A$  = Initial luminance of measured area ( $\text{cd/m}^2$ )

$Y_B$  = Subsequent luminance of measured area ( $\text{cd/m}^2$ )

The location measured will be exactly the same in both patterns

Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance ( $Y_A$ ) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance ( $Y_B$ ) of that same area when any adjacent area is driven dark (Refer to FIGURE 5).

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	P0	2014.04.30
SPEC. NUMBER	SPEC. TITLE	PAGE	
	NT156WHM-N50 Preliminary Product Specification	15 OF 36	

## 5.0 INTERFACE CONNECTION.

### 5.1 Electrical Interface Connection

The electronics interface connector is STM MSAK24025P40G or Compatible.

The connector interface pin assignments are listed in Table 6.

<Table 6. Pin Assignments for the Interface Connector>

Terminal	Symbol	Functions
Pin No.	Symbol	Description
1	NC	No Connection
2	VDDIN	Power Supply, 3.3V (typ.)
3	VDDIN	Power Supply, 3.3V (typ.)
4	VDC	VDC 3.3V power for EDID
5	NC	No Connection
6	CLK EDID	EDID Clock
7	Data EDID	EDID Data
8	RxIN0-	Transmission Data of 0 Negative -
9	RxIN0+	Transmission Data of 0 Positive +
10	GND	Ground
11	RxIN1-	Transmission Data of 1 Negative -
12	RxIN1+	Transmission Data of 1 Positive +
13	GND	Ground
14	RxIN2-	Transmission Data of 2 Negative -
15	RxIN2+	Transmission Data of 2 Positive +
16	GND	Ground
17	RxCLKIN-	Sampling Clock of Negative -
18	RxCLKIN+	Sampling Clock of Positive +
19	NC	No Connection
20	NC	No Connection
21	NC	No Connection
22	GND	Ground
23	NC	No Connection
24	NC	No Connection
25	GND	Ground
26	(CE)	No Connection
27	(CTL)	No Connection
28	GND	Ground
29	NC	No Connection
30	NC	No Connection

**BOE**

PRODUCT GROUP

REV

ISSUE DATE

TFT- LCD PRODUCT

P0

2014.04.30

SPEC. NUMBER

SPEC. TITLE

NT156WHM-N50 Preliminary Product Specification

PAGE


16 OF 36

Terminal	Symbol	Functions
Pin No.	Symbol	Description
31	VLED_GND	LED Ground
32	VLED_GND	LED Ground
33	VLED_GND	LED Ground
34	NC	No Connection
35	PWM	System PWM Signal Input
36	LED_EN	LED enable pin(+3.3V Input)
37	NC	No Connection
38	VLED	LED Power Supply 6V-21V
39	VLED	LED Power Supply 6V-21V
40	VLED	LED Power Supply 6V-21V




<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	P0	2014.04.30
SPEC. NUMBER	SPEC. TITLE	PAGE	
	NT156WHM-N50 Preliminary Product Specification	17 OF 36	

### 5.2 LVDS Interface

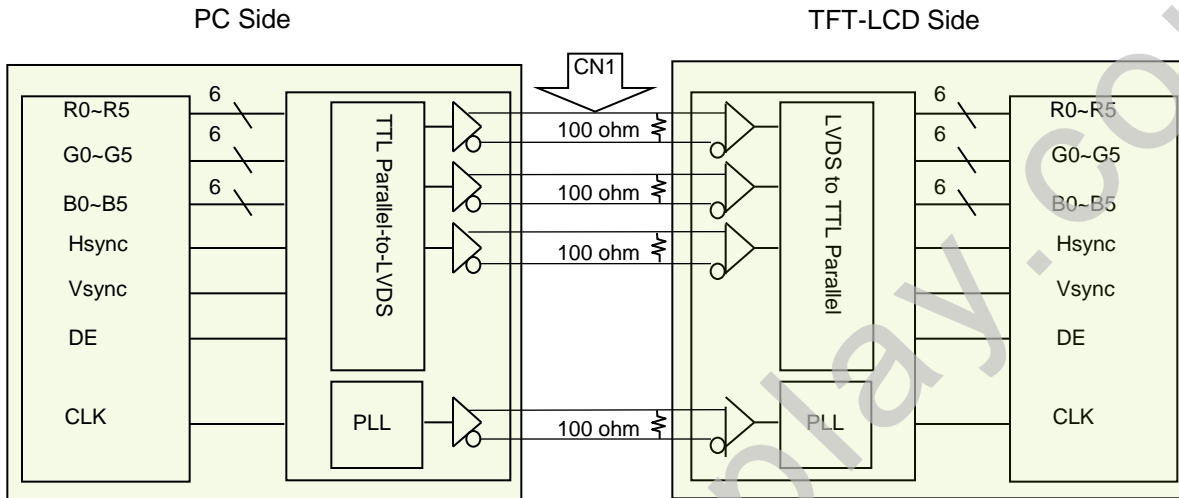

Note. Transmitter : Thine THC63LVDM63A or equivalent.  
Transmitter is not contained in Module.

### 5.3.1 LVDS Input signal

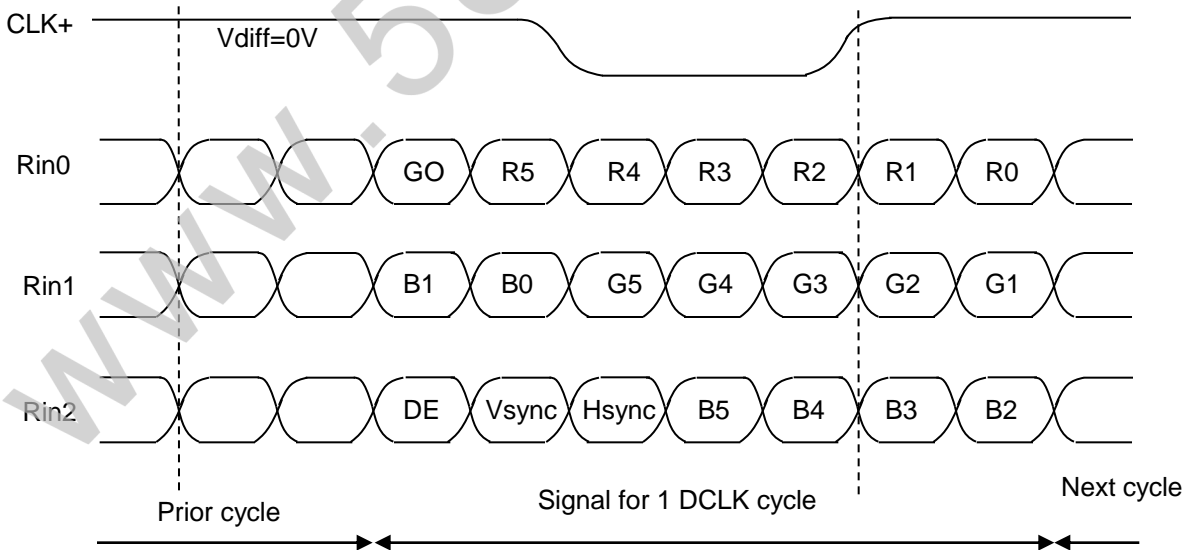


Note. Pin connection in case of using Thine THC63LVDM63A

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	P0	2014.04.30
SPEC. NUMBER	SPEC. TITLE	PAGE	
	NT156WHM-N50 Preliminary Product Specification	18 OF 36	

### 5.3.2 Data Input Format

<Table 6. Pin Assignments for the BLU & LCM Connector>

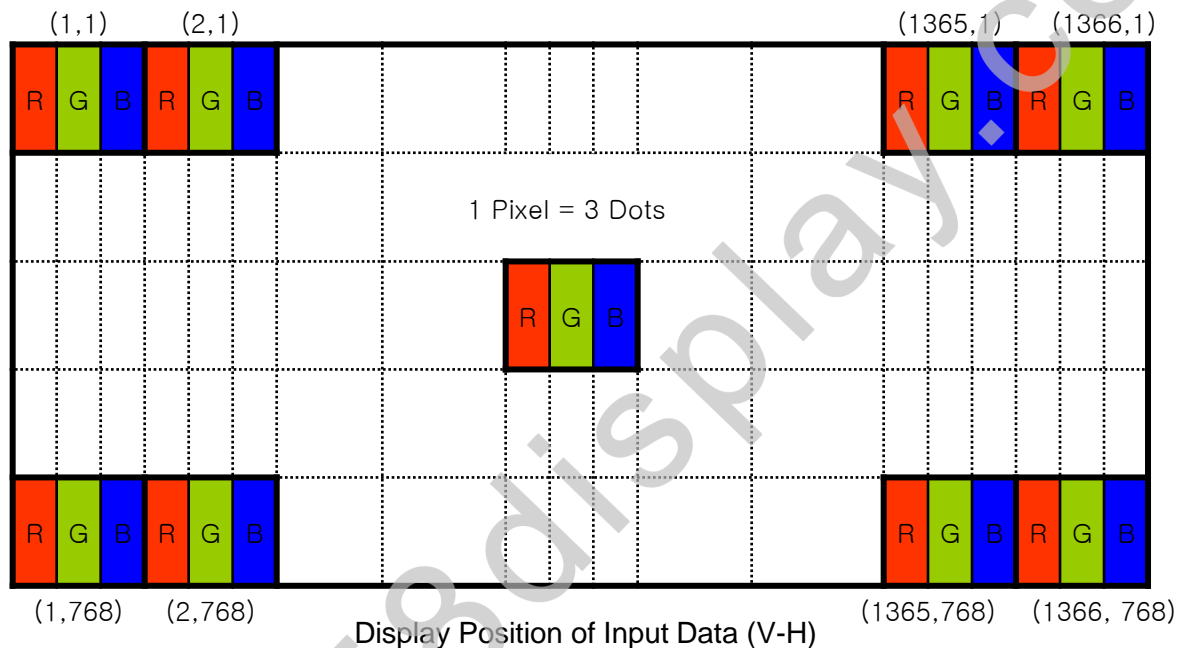

### 5.4 Back-light & LCM Interface Connection

Interface Connector: PF040-B09B-C09 or Equivalent

<Table 7. Pin Assignments for the BLU & LCM Connector>

Pin No.	Symbol	Description	Pin No.	Symbol	Description
1	LED1	NC	6	NC	No Connection
2	LED2	LED cathode connection	7	Vout	LED anode connection
3	LED3	LED cathode connection	8	Vout	LED anode connection
4	LED4	LED cathode connection	9	Vout	LED anode connection
5	NC	No Connection			

<b>BOE</b>	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P0	2014.04.30
SPEC. NUMBER	SPEC. TITLE	PAGE	
	NT156WHM-N50 Preliminary Product Specification	19 OF 36	

## 6.0 SIGNAL TIMING SPECIFICATION

6.1 The NT156WHM-N50 is operated by the DE only.

Item		Symbols	Min	Typ	Max	Unit
Clock	Frequency	1/Tc	67.5	72.3	76.3	MHz
	High Time	Tch	-	4/7	-	Tc
	Low Time	Tcl	-	3/7	-	Tc
Frame Period		Tv	778	790	802	lines
			-	60	-	Hz
			-	16.7	-	ms
Vertical Display Period		Tvd	768	768	768	lines
One line Scanning Period		Th	1446	1526	1586	clocks
Horizontal Display Period		Thd	1366	1366	1366	clocks

Note\*: This Module can support low frame refresh rate 50Hz & 40Hz.


<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT-LCD PRODUCT	P0	2014.04.30
SPEC. NUMBER	SPEC. TITLE NT156WHM-N50 Preliminary Product Specification		PAGE 20 OF 36

## 6.2 LVDS Rx Interface Timing Parameter

The specification of the LVDS Rx interface timing parameter is shown in Table 8.

<Table 8. LVDS Rx Interface Timing Specification>

Item	Symbol	Min	Typ	Max	Unit	Remark
CLKIN Period	tRCIP	-	13.83	25	nsec	
CLK Difference	tCdiff	-	-	-	nsec	
Input Data 0	tRIP1	-0.6	0.0	+0.6	nsec	F=65MHZ Vic=1.2V VID=±200mV
Input Data 1	tRIP0	tRICP/7-0.4	tRICP/7	tRICP/7+0.4	nsec	
Input Data 2	tRIP6	2 × tRICP/7-0.4	2 × tRICP/7	2 × tRICP/7+0.4	nsec	
Input Data 3	tRIP5	3 × tRICP/7-0.4	3 × tRICP/7	3 × tRICP/7+0.4	nsec	
Input Data 4	tRIP4	4 × tRICP/7-0.4	4 × tRICP/7	4 × tRICP/7+0.4	nsec	
Input Data 5	tRIP3	5 × tRICP/7-0.4	5 × tRICP/7	5 × tRICP/7+0.4	nsec	
Input Data 6	tRIP2	6 × tRICP/7-0.4	6 × tRICP/7	6 × tRICP/7+0.4	nsec	

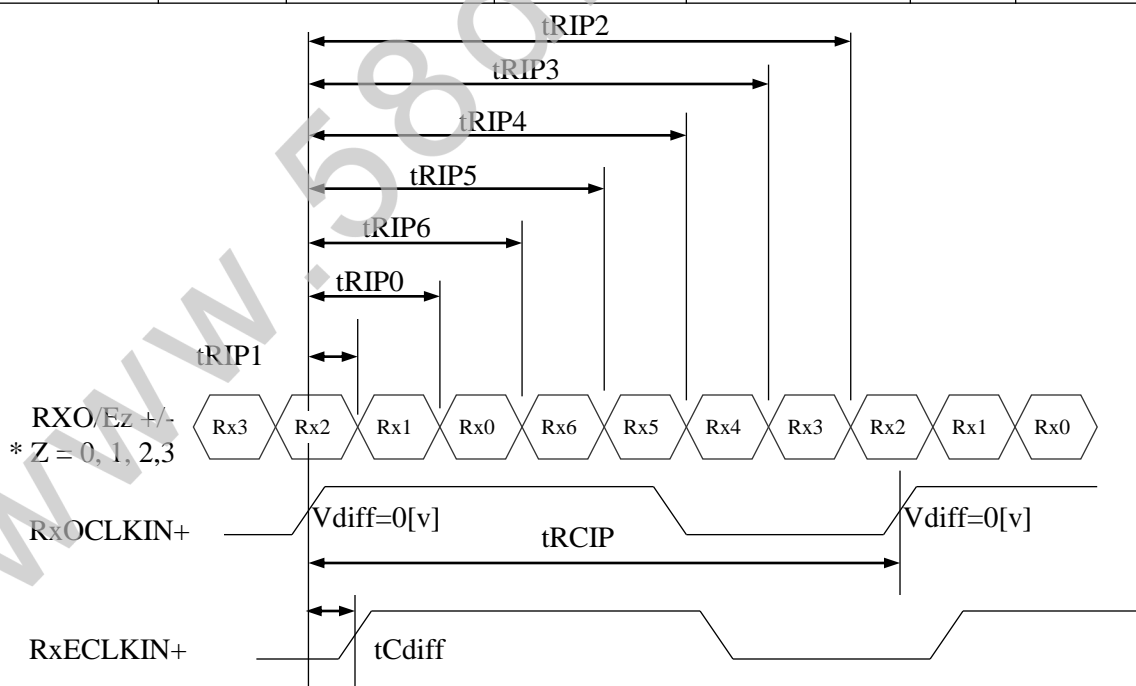


\* Vdiff = (RXO/Ez+)-(RXO/Ez-),.... ,(RXO/ECLK+)-(RXO/ECLK-)

<b>BOE</b>	PRODUCT GROUP	REV	ISSUE DATE
	TFT-LCD PRODUCT	P0	2014.04.30
SPEC. NUMBER	SPEC. TITLE	PAGE	
	NT156WHM-N50 Preliminary Product Specification	21 OF 36	


## 7.0 SIGNAL TIMING WAVEFORMS OF INTERFACE SIGNAL

### 7.1 Sync Timing Waveforms

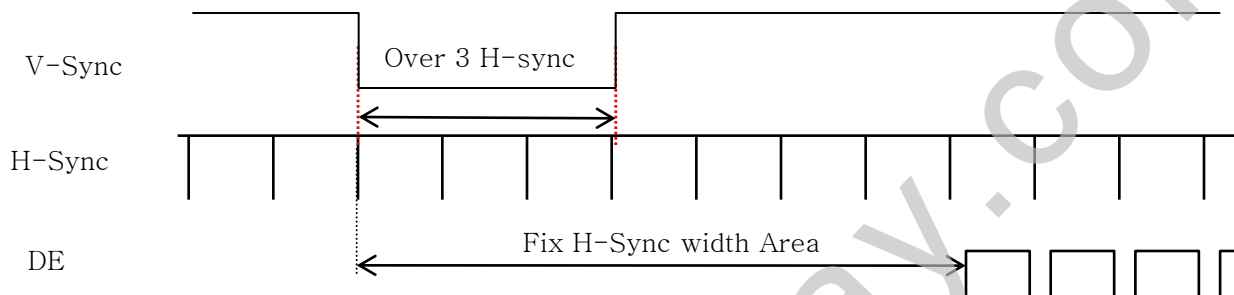



- 1) Need over 3 H-sync during V-Sync Low
- 2) Fix H-Sync width from V-Sync falling edge to first rising edge

### 7.2 Vertical Timing Waveforms

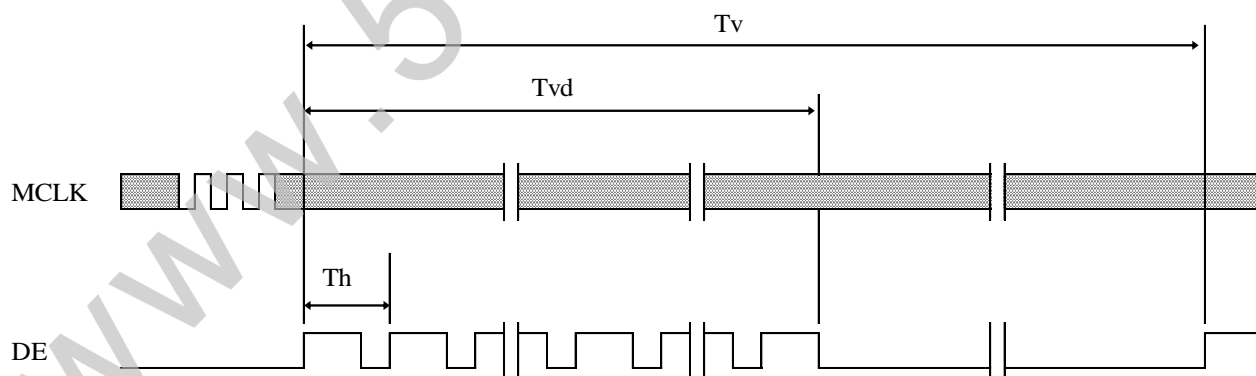

<b>BOE</b>	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P0	2014.04.30
SPEC. NUMBER	SPEC. TITLE	PAGE	
	NT156WHM-N50 Preliminary Product Specification	22 OF 36	

### 7.3 Horizontal Timing Waveforms

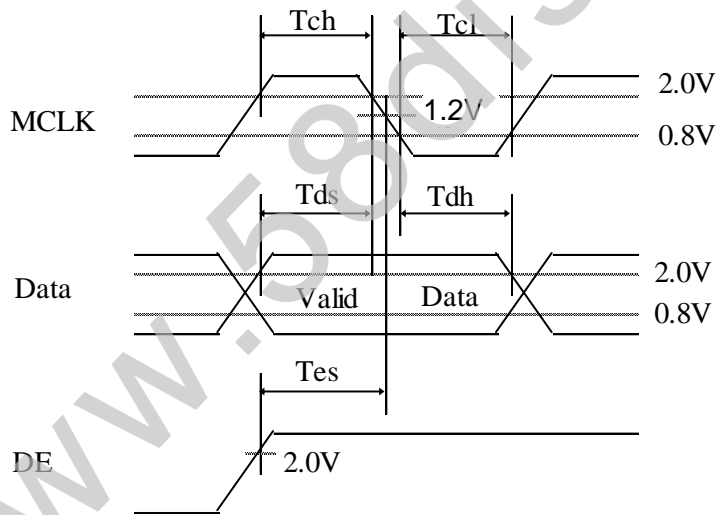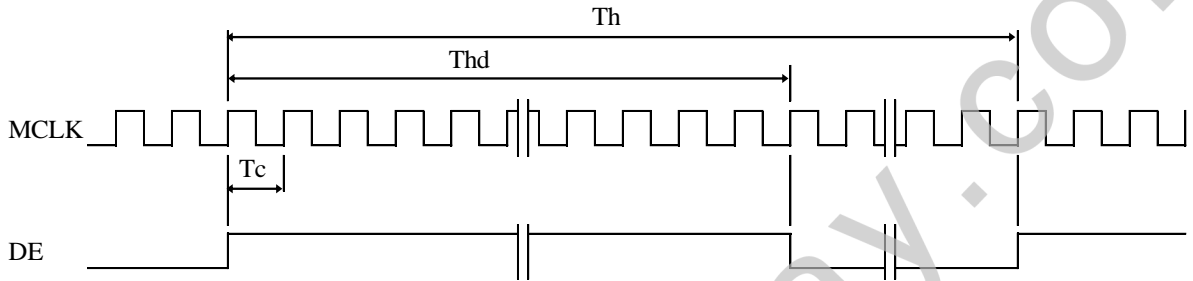

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	P0	2014.04.30
SPEC. NUMBER	SPEC. TITLE		PAGE
	NT156WHM-N50 Preliminary Product Specification		23 OF 36


## 8.0 INPUT SIGNALS, BASIC DISPLAY COLORS & GRAY SCALE OF COLORS

	Colors & Gray scale	Data signal																	
		R0	R1	R2	R3	R4	R5	G0	G1	G2	G3	G4	G5	B0	B1	B2	B3	B4	B5
Basic colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Light Blue	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Purple	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray scale of Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Darker	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	↑						↑						↑					
	▽	↓						↓						↓					
	Brighter	1	0	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	▽	0	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	
Gray scale of Green	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0
	Darker	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0
	△	↑						↑						↑					
	▽	↓						↓						↓					
	Brighter	0	0	0	0	0	0	1	0	1	1	1	1	0	0	0	0	0	0
	▽	0	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0
Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0	
Gray scale of Blue	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0
	Darker	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0
	△	↑						↓						↑					
	▽	↓						↓						↓					
	Brighter	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1
	▽	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1
Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	
Gray scale of White & Black	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	1	0	0	0	0	0	1	0	0	0	0	0	1	0	0	0	0	0
	Darker	0	1	0	0	0	0	0	1	0	0	0	0	0	1	0	0	0	0
	△	↑						↑						↑					
	▽	↓						↓						↓					
	Brighter	1	0	1	1	1	1	1	0	1	1	1	1	1	0	1	1	1	1
	▽	0	1	1	1	1	1	0	1	1	1	1	1	0	1	1	1	1	1
White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	

<b>BOE</b>	PRODUCT GROUP	REV	ISSUE DATE
	TFT-LCD PRODUCT	P0	2014.04.30
SPEC. NUMBER	SPEC. TITLE	PAGE	
	NT156WHM-N50 Preliminary Product Specification	24 OF 36	

## 9.0 POWER SEQUENCE

To prevent a latch-up or DC operation of the LCD module, the power on/off sequence shall be as shown in below

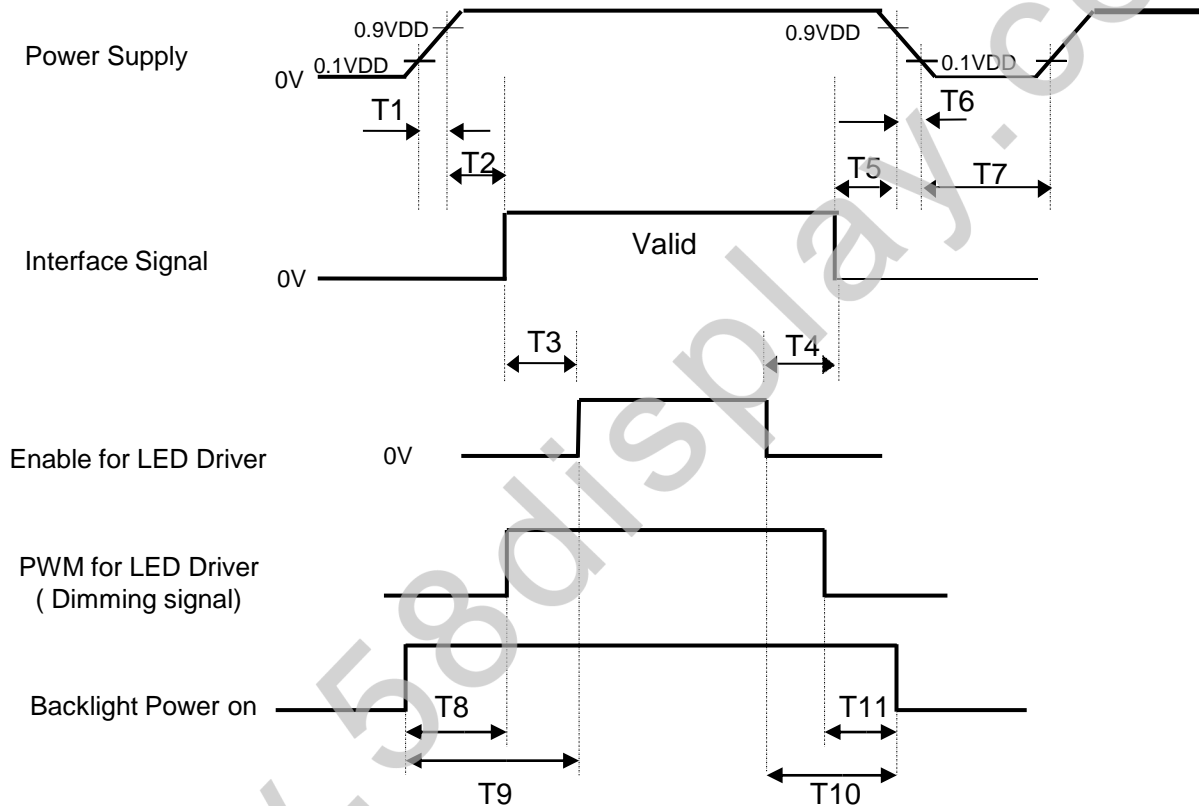

- $0.5\text{ms} \leq T1 \leq 10\text{ms}$
- $0\text{ms} \leq T2 \leq 50\text{ms}$
- $200\text{ms} \leq T3$
- $0\text{ms} \leq T4$
- $0\text{ms} \leq T5$

- $0\text{ms} \leq T6 \leq 10\text{ms}$
- $150\text{ms} \leq T7$
- $0\text{ms} \leq T8$
- $0\text{ms} \leq T9$
- $0\text{ms} \leq T10$
- $0\text{ms} \leq T11$


### Notes:

- When the power supply VDD is 0V, keep the level of input signals on the low or keep high impedance.
- Do not keep the interface signal high impedance when power is on. Back Light must be turn on after power for logic and interface signal are valid.



<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	P0	2014.04.30
SPEC. NUMBER	SPEC. TITLE	PAGE	
	NT156WHM-N50 Preliminary Product Specification	25 OF 36	

## 9.1 Momentary voltage

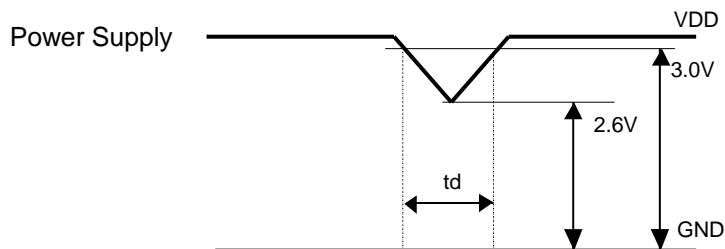

●  $t_d \leq 10 \text{ ms}$

### Notes:

When momentary voltage  $VDD \geq 2.6V$  during  $t_d$ , the unit can work normally when VDD return to 3.0V.

## 10.0 Connector Description

Physical interface is described as for the connector on LCM.

These connectors are capable of accommodating the following signals and will be following components.

### 10.1 TFT LCD Module

Connector Name /Description	For Signal Connector
Manufacturer	STM or Compatible
Type/ Part Number	MSAK24025P40G or Compatible
Mating housing/ Part Number	I-PEX 20455-040T-11 or Compatible

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	P0	2014.04.30
SPEC. NUMBER	SPEC. TITLE	PAGE	
	NT156WHM-N50 Preliminary Product Specification	26 OF 36	

## 11.0 MECHANICAL CHARACTERISTICS

### 11.1 Dimensional Requirements

FIGURE 6 shows mechanical outlines for the model NT156WHM-N50. Other parameters are shown in Table 9.

<Table 9. Dimensional Parameters>

Parameter	Specification	Unit
Active Area	344.23 (H) × 193.54(V)	
Number of pixels	1366 (H) X 768 (V) (1 pixel = R + G + B dots)	
Pixel pitch	0.252 (H) X 0.252 (V)	
Pixel arrangement	RGB Vertical stripe	
Display colors	262K	
Display mode	Normally white	
Dimensional outline	359.32(H)*209.54 (V) (W/PCB)*5.5(Max)	mm
Weight	450g(Max)	gram
Back Light	Connector :PF040-B09B-C09	
	LED, Horizontal-LED Array type	

### 11.2 Mounting

See FIGURE 6.

### 11.3 Glare and Polarizer Hardness.

The surface of the LCD has an glare coating to maximize readability and hard coating to reduce scratching.

### 11.4 Light Leakage

There shall not be visible light from the back-lighting system around the edges of the screen as seen from a distance 50cm from the screen with an overhead light level of 350lux.

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	P0	2014.04.30
SPEC. NUMBER	SPEC. TITLE	PAGE	
	NT156WHM-N50 Preliminary Product Specification	27 OF 36	

## 12.0 RELIABILITY TEST

The Reliability test items and its conditions are shown in below.

<Table 10. Reliability test>

No	Test Items	Conditions
1	High temperature storage test	Ta = 60 °C , 240 hrs
2	Low temperature storage test	Ta = -20 °C , 240 hrs
3	High temperature & high humidity operation test	Ta = 50 °C , 80%RH, 240 hrs
4	High temperature operation test	Ta = 50 °C , 240 hrs
5	Low temperature operation test	Ta = 0 °C , 240 hrs
6	Thermal shock	Ta = -20 °C ↔ 60 °C (0.5 hr), 100 cycle
7	Vibration test (non-operating)	1.5G, 10~500Hz, Half Sine X, Y, Z / Sweep rate : 1 hour
8	Shock test (non-operating)	220G, Half Sine Wave 2msec ± X, ± Y, ± Z Once for each direction
9	Electro-static discharge test (non-operating)	Air : 150 pF, 330Ω, 15 KV Contact : 150 pF, 330Ω, 8 KV

## 13.0 HANDLING & CAUTIONS

### (1) Cautions when taking out the module

- Pick the pouch only, when taking out module from a shipping package.

### (2) Cautions for handling the module

- As the electrostatic discharges may break the LCD module, handle the LCD module with care. Peel a protection sheet off from the LCD panel surface as slowly as possible.
- As the LCD panel and back - light element are made from fragile glass material, impulse and pressure to the LCD module should be avoided.
- As the surface of the polarizer is very soft and easily scratched, use a soft dry cloth without chemicals for cleaning.
- Do not pull the interface connector in or out while the LCD module is operating.
- Put the module display side down on a flat horizontal plane.
- Handle connectors and cables with care.

### (3) Cautions for the operation

- When the module is operating, do not lose CLK, ENAB signals. If any one of these signals is lost, the LCD panel would be damaged.
- Obey the supply voltage sequence. If wrong sequence is applied, the module would be damaged.

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	P0	2014.04.30
SPEC. NUMBER	SPEC. TITLE	PAGE	
	NT156WHM-N50 Preliminary Product Specification	28 OF 36	

- (4) Cautions for the atmosphere
  - Dew drop atmosphere should be avoided.
  - Do not store and/or operate the LCD module in a high temperature and/or humidity atmosphere. Storage in an electro-conductive polymer packing pouch and under relatively low temperature atmosphere is recommended.
- (5) Cautions for the module characteristics
  - Do not apply fixed pattern data signal to the LCD module at product aging.
  - Applying fixed pattern for a long time may cause image sticking.
- (6) Other cautions
  - Do not disassemble and/or re-assemble LCD module.
  - Do not re-adjust variable resistor or switch etc.
  - When returning the module for repair or etc., Please pack the module not to be broken. We recommend to use the original shipping packages.

**14.0 LABEL**

(1) Product label




Module ID Naming Rule:


Code \ Digit	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
Code	S	L	S	5	1	2	3	5	9	4	2	0	0	0	1	D	B
Description	Model Code /GBN		Grade	Line	Year		Month	Model Extension Code (Last 4 Digits Of FG COD)				Serial No 00001-ZZZZZZ					

<b>BOE</b>	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P0	2014.04.30
SPEC. NUMBER	SPEC. TITLE	PAGE	
	NT156WHM-N50 Preliminary Product Specification	29 OF 36	

(2) High voltage caution label

	HIGH VOLTAGE CAUTION	COLD CATHODE FLUORESCENT LAMP IN LCD PANEL CONTAINS A SMALL AMOUNT OF MERCURY. PLEASE FOLLOW LOCAL ORDINANCES OR REGULATIONS FOR DISPOSAL.
	RISK OF ELECTRIC SHOCK. DISCONNECT THE ELECTRIC POWER BEFORE SERVICING	

(3) Box label

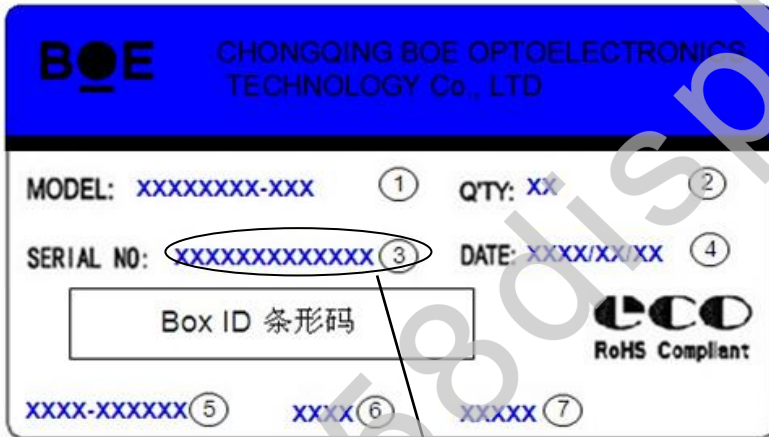

**BOE** CHONGQING BOE OPTOELECTRONICS TECHNOLOGY Co., LTD  
 MODEL: XXXXXXXX-XXX (1) QTY: XX (2)  
 SERIAL NO: XXXXXXXXXXXXX (3) DATE: XXXX/XX/XX (4)  
 Box ID 条形码  
 XXXX-XXXXXX (5) XXXX (6) XXXXX (7)  
 RoHS Compliant

序列号标注部分需打印, 说明如下:

- |                          |         |
|--------------------------|---------|
| 1. <b>FG-CODE</b> (前12位) | 2. 产品数量 |
| 3. <b>Box ID</b>         | 4. 包装日期 |
| 5. 客户端段物料号(客户端)          |         |
| 6. FG-Code后四位            |         |
| 7. 供应商代码                 |         |

**Total Size:100×50mm**


Digit	1	2	3	4	5	6	7	8	9	10	11	12	13
Code	S	L	S	5	1	2	3	D	0	0	0	6	8
Description	Products GBN		Grade	Line	Year		Month	Revision Code	SerialNo				

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	P0	2014.04.30
SPEC. NUMBER	SPEC. TITLE	PAGE	
	NT156WHM-N50 Preliminary Product Specification	30 OF 36	

## 15.0 PACKING INFORMATION


### 15.1 Packing order

step **1**

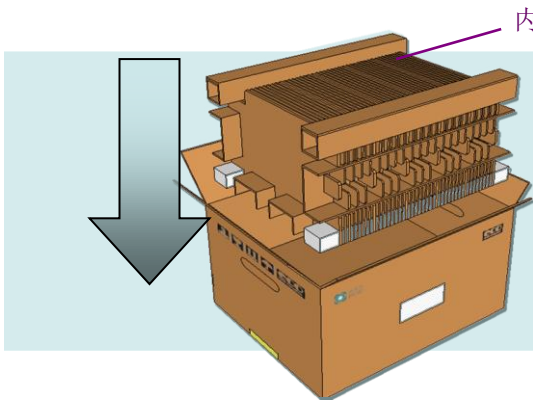


- . Put Pad into the inner box

step **2**

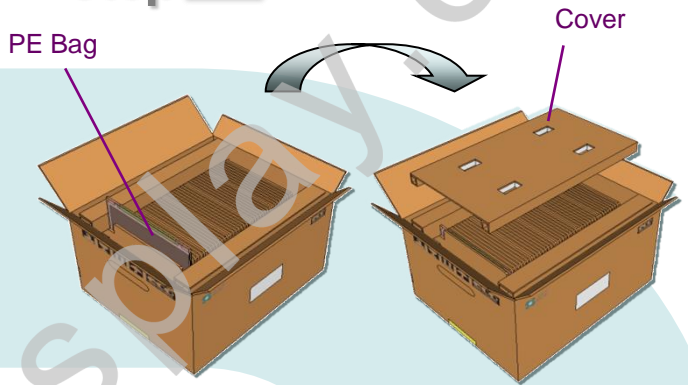

- . Put module into the paper spacer and modules bundled by PE Bag
- . Put Cover on the top of the pad
- . Capa.: 38pcs MDL/Inner Box

step **4**

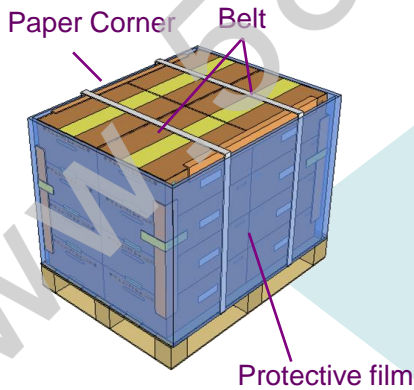

- . Pack with paper corner & belt , and use wrapping film to bind up them

step **3**



- . 12ea Box/Pallet, 456 ea MDL/Pallet


### 15.2 Notes

- Box Dimension: 588\*488\*303mm
- Package Quantity in one Box: 38pcs
- Total Weight:19.3kg/Box

<b>BOE</b>	PRODUCT GROUP	REV	ISSUE DATE
	TFT-LCD PRODUCT	P0	2014.04.30
SPEC. NUMBER	SPEC. TITLE	PAGE	
	NT156WHM-N50 Preliminary Product Specification	31 OF 36	

### 16.0 MECHANICAL OUTLINE DIMENSION


Figure 6. TFT-LCD Module Outline Dimension (Front View)

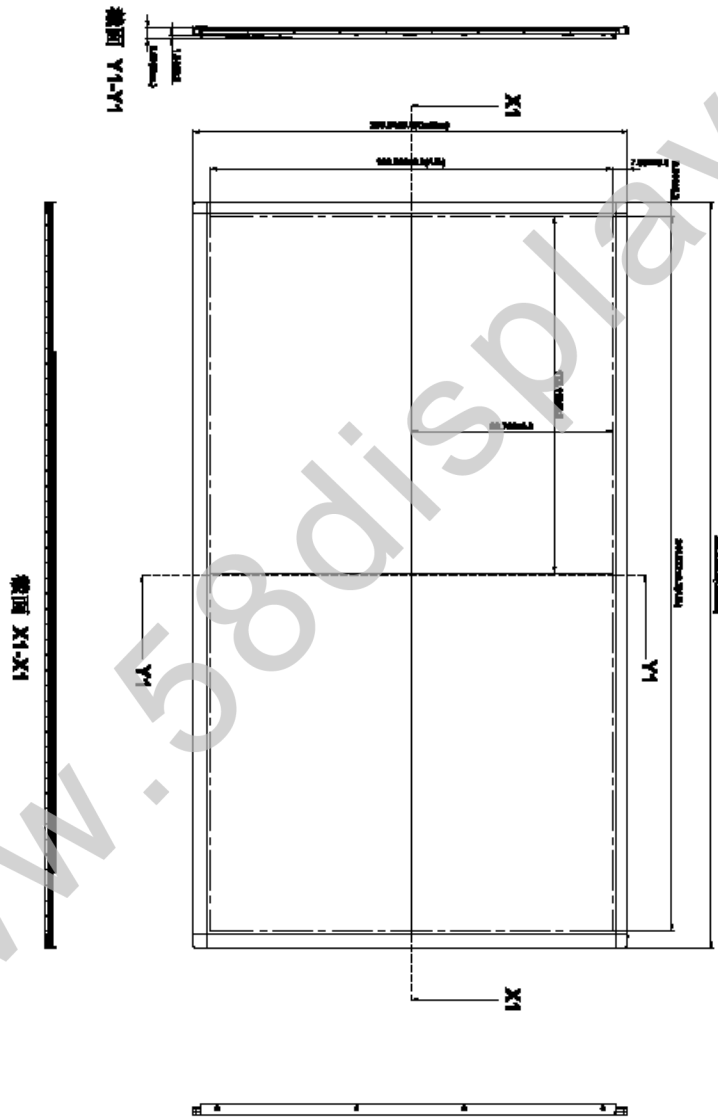

<b>BOE</b>	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P0	2014.04.30
SPEC. NUMBER	SPEC. TITLE	PAGE	
	NT156WHM-N50 Preliminary Product Specification	32 OF 36	

### 16.0 MECHANICAL OUTLINE DIMENSION

Figure 6. TFT-LCD Module Outline Dimension (Back View)

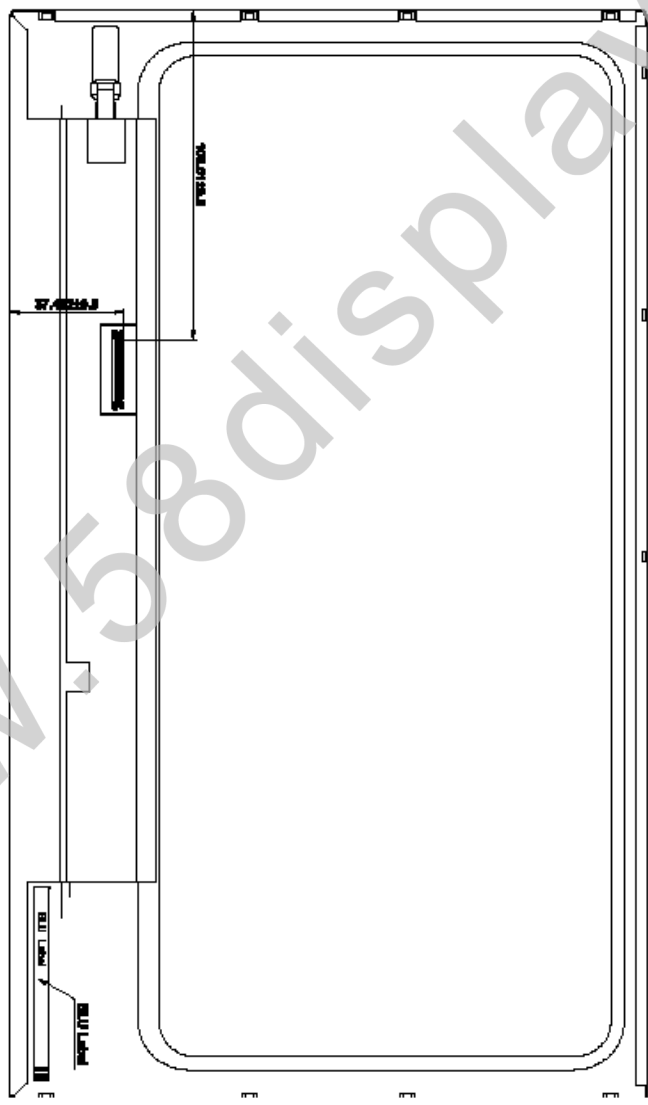



<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	P0	2014.04.30
SPEC. NUMBER	SPEC. TITLE		PAGE
	NT156WHM-N50 Preliminary Product Specification		33 OF 36

**17.0 EDID Table**

Address (HEX)	Function	Hex	Dec	Input values.	Notes
00	Header	00	0	0	EDID Header
01		FF	255	255	
02		FF	255	255	
03		FF	255	255	
04		FF	255	255	
05		FF	255	255	
06		FF	255	255	
07		00	0	0	
08	ID Manufacturer Name	09	9	BOE	ID = BOE
09		E5	229		
0A	ID Product Code	D3	211	1747	ID = 1747
0B		06	6		
0C	32-bit serial No.	00	0		
0D		00	0		
0E		00	0		
0F		00	0		
10	Week of manufacture	01	1	1	
11	Year of Manufacture	1A	26	2016	Manufactured in 2016
12	EDID Structure Ver.	01	1	1	EDID Ver 1.0
13	EDID revision #	03	3	3	EDID Rev. 0.3
14	Video input definition	95	149	-	digital signal/DP input
15	Max H image size	22	34	34	34 cm (Approx)
16	Max V image size	13	19	19	19 cm (Approx)
17	Display Gamma	78	120	2.2	Gamma curve = 2.2
18	Feature support	02	2		RGB display, Preferred Timming mode/RGB 4:4:4
19	Red/Green low bits	24	36	-	Red / Green Low Bits
1A	Blue/White low bits	10	16	-	Blue / White Low Bits
1B	Red x high bits	97	151	0.590	Red (x) = 10010111 (0.59)
1C	Red y high bits	59	89	0.350	Red (y) = 01011001 (0.35)
1D	Green x high bits	54	84	0.330	Green (x) = 01010100 (0.33)
1E	Green y high bits	8E	142	0.555	Green (y) = 10001110 (0.555)
1F	Blue x high bits	27	39	0.153	Blue (x) = 00100111 (0.153)
20	Blue y high bits	1E	30	0.119	Blue (y) = 00011110 (0.119)
21	White x high bits	50	80	0.313	White (x) = 01010000 (0.313)
22	White y high bits	54	84	0.329	White (y) = 01010100 (0.329)
23	Established timing 1	00	0	-	
24	Established timing 2	00	0	-	

<b>BOE</b>	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P0	2014.04.30
SPEC. NUMBER	SPEC. TITLE	PAGE	
	NT156WHM-N50 Preliminary Product Specification	34 OF 36	

**17.0 EDID Table**

25	Established timing 3	00	0	-	
26	Standard timing #1	01	1		Not Used
27		01	1		
28	Standard timing #2	01	1		Not Used
29		01	1		
2A	Standard timing #3	01	1		Not Used
2B		01	1		
2C	Standard timing #4	01	1		Not Used
2D		01	1		
2E	Standard timing #5	01	1		Not Used
2F		01	1		
30	Standard timing #6	01	1		Not Used
31		01	1		
32	Standard timing #7	01	1		Not Used
33		01	1		
34	Standard timing #8	01	1		Not Used
35		01	1		
36	Detailed timing/monitor descriptor #1	3E	62	72.3	72.3MHz Main clock
37		1C	28		
38		56	86	1366	Hor Active = 1366
39		A0	160	160	Hor Blanking = 160
3A		50	80	-	4 bits of Hor. Active + 4 bits of Hor. Blanking
3B		00	0	768	Ver Active = 768
3C		16	22	22	Ver Blanking = 22
3D		30	48	-	4 bits of Ver. Active + 4 bits of Ver. Blanking
3E		30	48	48	Hor Sync Offset = 48
3F		20	32	32	H Sync Pulse Width = 32
40		36	54	3	V sync Offset = 3 line
41		00	0	6	V Sync Pulse width : 6 line
42		58	88	344	Horizontal Image Size = 344 mm (Low 8 bits)
43		C2	194	194	Vertical Image Size = 194 mm (Low 8 bits)
44		10	16	-	4 bits of Hor Image Size + 4 bits of Ver Image Size
45		00	0	0	Hor Border (pixels)
46		00	0	0	Vertical Border (Lines)
47	1A	26		Refer to right table	

<b>BOE</b>	<b>PRODUCT GROUP</b>	<b>REV</b>	<b>ISSUE DATE</b>
	TFT- LCD PRODUCT	P0	2014.04.30
<b>SPEC. NUMBER</b>	<b>SPEC. TITLE</b>		<b>PAGE</b>
	NT156WHM-N50 Preliminary Product Specification		35 OF 36

**17.0 EDID Table**

48	Detailed timing/monitor descriptor #2	00	0	0	0MHz Main clock
49		00	0		
4A		00	0		
4B		00	0	0	Hor Active = 0
4C		00	0	0	Hor Blanking = 0
4D		00	0	-	4 bits of Hor. Active + 4 bits of Hor. Blanking
4E		00	0	0	Ver Active = 0
4F		00	0	0	Ver Blanking = 0
50		00	0	-	4 bits of Ver. Active + 4 bits of Ver. Blanking
51		00	0	0	Hor Sync Offset = 0
52		00	0	0	H Sync Pulse Width = 0
53		00	0	0	V sync Offset =0 line
54		00	0	0	V Sync Pulse width : 0 line
55		00	0	0	Horizontal Image Size = 0 mm (Low 8 bits)
56		00	0	0	Vertical Image Size =0 mm (Low 8 bits)
57		00	0	-	4 bits of Hor Image Size + 4 bits of Ver Image Size
58		00	0	0	Hor Border (pixels)
59		00	0	0	Vertical Border (Lines)
5A		1A	26		ASCII Data Sting Tag
5B	00	0			
5C	00	0			
5D	FE	254			
5E	00	0			
5F	42	66	B	Manufacture name : BOECQ	
60	4F	79	O		
61	45	69	E		
62	20	32			
63	43	67	C		
64	51	81	Q		
65	0A	10			
66	20	32			
67	20	32			
68	20	32			
69	20	32			
6A	20	32			
6B	20	32			
6C	20	32			
6D	20	32			
6E	20	32			
6F	20	32			
70	20	32			
71	20	32			
72	20	32			
73	20	32			
74	20	32			
75	20	32			
76	20	32			
77	20	32			
78	20	32			
79	20	32			
7A	20	32			
7B	20	32			
7C	20	32			
7D	20	32			
7E	20	32			
7F	20	32			

<b>BOE</b>	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P0	2014.04.30
SPEC. NUMBER	SPEC. TITLE	PAGE	
	NT156WHM-N50 Preliminary Product Specification	36 OF 36	

**17.0 EDID Table**

6C	Detailed timing/monitor descriptor #4	00	0		Product Name Tag (ASCII)
6D		00	0		
6E		00	0		
6F		FE	254		
70		00	0		Model name : NT156WHM-N50
71		4E	78	N	
72		54	84	T	
73		31	49	1	
74		35	53	5	
75		36	54	6	
76		57	87	W	
77		48	72	H	
78		4D	77	M	
79		2D	45	-	
7A	4E	78	N		
7B	35	53	5		
7C	30	48	0		
7D	0A	10			
7E	Extension flag	00	0		
7F	Checksum	AF	175		