

SECTION 4 MECHANISM

CONTENTS

DECK MECHANISM PARTS LOCATIONS

- **Top View**4-1
- **Bottom View**4-1

DECK MECHANISM DISASSEMBLY

1. Drum Assembly4-2
2. Plate Assembly Top4-3
3. Holder Assembly CST4-3
4. Guide CST4-3
5. Bracket Side(L)/Bracket Assembly Door4-3
6. Arm Assembly F/L4-3
7. Lever Assembly S/W4-3
8. Arm Assembly Cleaner4-5
9. Head F/E4-5
10. Base Assembly A/C Head4-5
11. Brake Assembly S4-6
12. Brake Assembly T4-6
13. Arm Assembly Tension4-6
14. Reel S/Reel T4-6
15. Support CST4-7
16. Base Assembly P44-7
17. Opener Lid4-7
18. Arm Assembly T/up4-7
19. Arm Assembly Pinch4-7
20. Belt Capstan/Motor Capstan4-8
21. Clutch Assembly D334-8
22. Lever F/R4-8
23. Gear Assembly H-up/D4-8
24. Bracket Assembly Jog4-9
25. Guide Rack F/L, Gear Rack F/L4-9
26. Brake Assembly Capstan4-9
27. Gear Drive/Gear Cam/Gear Connector4-10
28. Bracket Assembly L/D Motor4-10
29. Gear Sector4-11
30. Base Tension/Plate Slider/Lever Tension4-11
31. Gear Assembly P3/Gear Assembly P24-12
32. Base Assembly P3/Base Assembly P24-12
33. Arm Assembly Idler Jog4-12

DECK MECHANISM ADJUSTMENT

- **Tools and Fixtures for Service**4-13
1. Mechanism and Mode Switch Alignment Check4-14
 2. Deck Preparation for Adjustment4-15
 3. Checking Torque4-15
 4. Guide Roller Height Adjustment4-16
 - 4-1. Preliminary Adjustment4-16
 - 4-2. Precise Adjustment4-16
 5. Audio/Control (A/C) Head Adjustment4-17
 - 5-1. Preliminary Adjustment4-17
 - 5-2. Confirmation of Tape Path between Pinch Roller and Take-up Guide4-18
 - 5-3. Precise Adjustment(Azimuth Adjustment)4-18
 6. X-Value Adjustment4-18
 7. Adjustment after Replacing Drum Assembly (Video Heads)4-19
 8. Check the Tape Travel after Reassembling Deck Mechanism4-19
 - 8-1. Checking Audio and RF Locking Time during Playback after CUE or REV4-19
 - 8-2. Checking Tape Curling or Jamming4-19

MAIN TENANCE/INSPECTION PROCEDURE

1. Check before starting Repairs4-20
2. Required Maintenance4-21
3. Scheduled Maintenance4-21
4. Supplies Required for Inspection and Maintenance4-21
5. Maintenance Procedure4-21
 - 5-1. Cleaning4-21
 - 5-2. Greasing4-22

MACHANISM TROUBLESHOOTING GUIDE


1. Deck Mechanism4-23
2. Front Loading Mechanism4-26

EXPLODED VIEWS

1. Front Loading Mechanism Section4-28
2. Moving Mechanism Section (1)4-29
3. Moving Mechanism Section (2)4-30


DECK MECHANISM PARTS LOCATIONS

• Top View

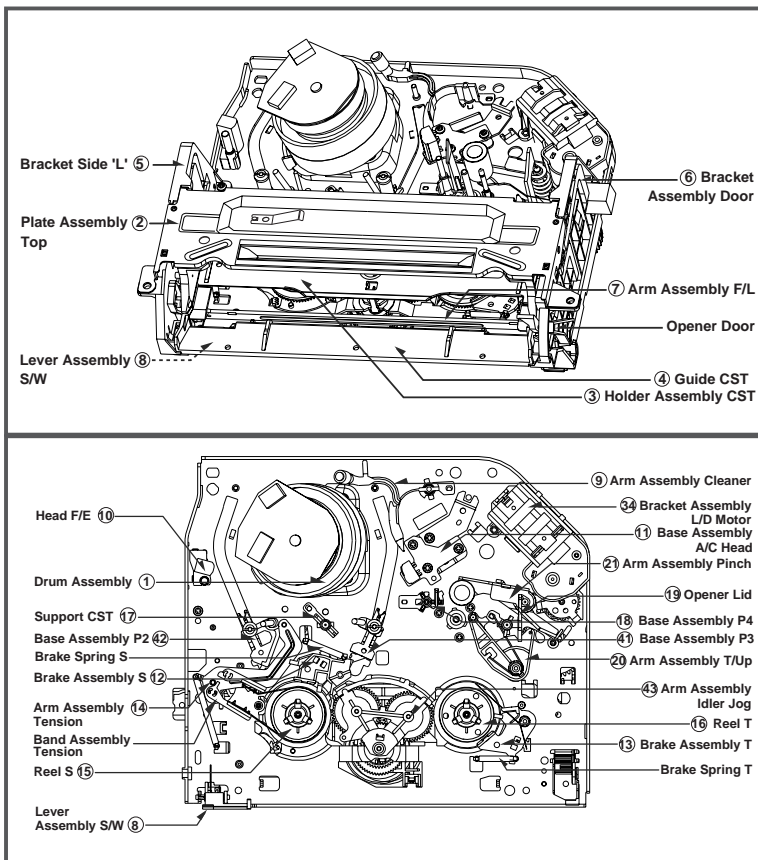

Pracedure		Part	Fixing Type	Fig-ure
Starting No.				
2	1	Drum Assembly	3 Screws , Cap FPC	A-1
	2	Plate Assembly Top	Two Hooks	A-2
2,3,4	3	Holder Assembly CST	Chassis Hole	A-2
	4	Guide CST	2 Hooks	A-2
2,3,4	5	Bracket Side (L)	1 Screw	A-2
	6	Bracket Assembly Door	1 Screw	A-2
2,3,4,5,6	7	Arm Assembly F/L	Chassis Hole	A-2
	8	Lever Assembly S/W	Chassis Hole	A-2
2,3,4,5	9	Arm Assembly Cleaner	Chassis Embossing	A-3
	10	Head F/E	2 Hooks	A-3
2,3	11	Base Assembly A/C Head	1 Screw	A-3
	12	Brake Assembly S	Chassis Hole	A-4
2,3,12	13	Brake Assembly T	Chassis Hole	A-4
	14	Arm Assembly Tension	Chassis Hole	A-4
2,3,12,14	15	Reel S	Chassis Shaft	A-4
	16	Reel T	Chassis Shaft	A-4
2,3,13	17	Support CST	Chassis Embossing	A-5
	18	Base Assembly P4	Chassis Embossing	A-5
19	19	Opener Lid	Chassis Embossing	A-5
	20	Arm Assembly T/Up	Chassis Embossing	A-5
19	21	Arm Assembly Pinch	Chassis Shaft	A-5

• Bottom View

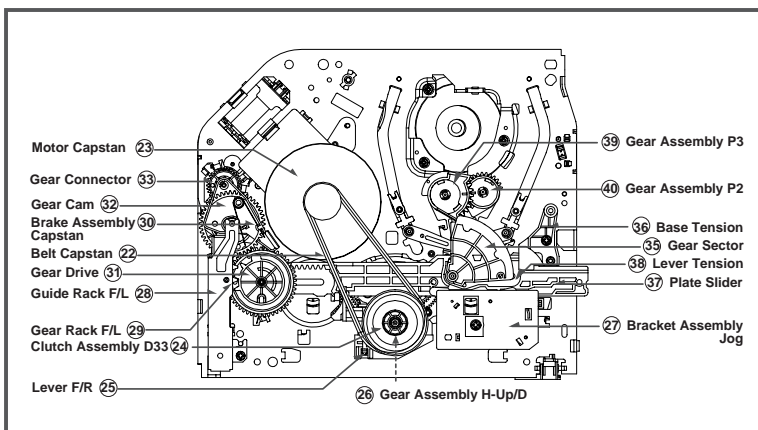

NOTE : When reassembly perform the procedure in the reverse order.

- 1) When reassembling, confirm Mechanism and Mode Switch Alignment Position (Pefer to Page 4-14)
- 2) When disassembling, the Parts for Starting No. Should be removed first.

Pracedure		Part	Fixing Type	Fig-ure
Starting No.				
22	22	Belt Capstan	3 Screws	A-6
	23	Motor Capstan	1 Washer	A-6
22,24	24	Clutch Assembly D33	1 Hook	A-6
	25	Lever F/R	2 Washers	A-6
22,24	26	Gear Assembly H-Up/D	1 Screw	A-7
	27	Bracket Assembly Jog	1 Screw	A-7
28	28	Guide Rack F/L	Chassis Shaft	A-7
	29	Gear Rack F/L	Chassis Shaft	A-7
28, 29	30	Brake Assembly Capstan	1 Washer	A-8
	31	Gear Drive	Chassis Shaft	A-8
28, 29, 30	32	Gear Cam	Chassis Shaft	A-8
	33	Gear Connector	3 Hooks	A-8
28, 29, 30, 31	34	Bracket Assembly L/D Motor	3 Washers	A-9
	35	Gear Sector	1 Screw	A-9
22, 24, 25, 27	36	BaseTension	Chassis Shaft	A-9
	37	Plate Slider	Chassis Shaft	A-9
28, 29, 31, 35	38	Lever Tension	Chassis Hole	A-9
	39	Gear Assembly P3	2 Hooks	A-10
35, 39	40	Gear Assembly P2	2 Hooks	A-10
	41	Base Assembly P3	Chassis Hole	A-10
35, 39, 40, 41	42	Base Assembly P2	Chassis Hole	A-10
	43	Arm Assembly Idler Jog	1 Hook	A-10

DECK MECHANISM DISASSEMBLY

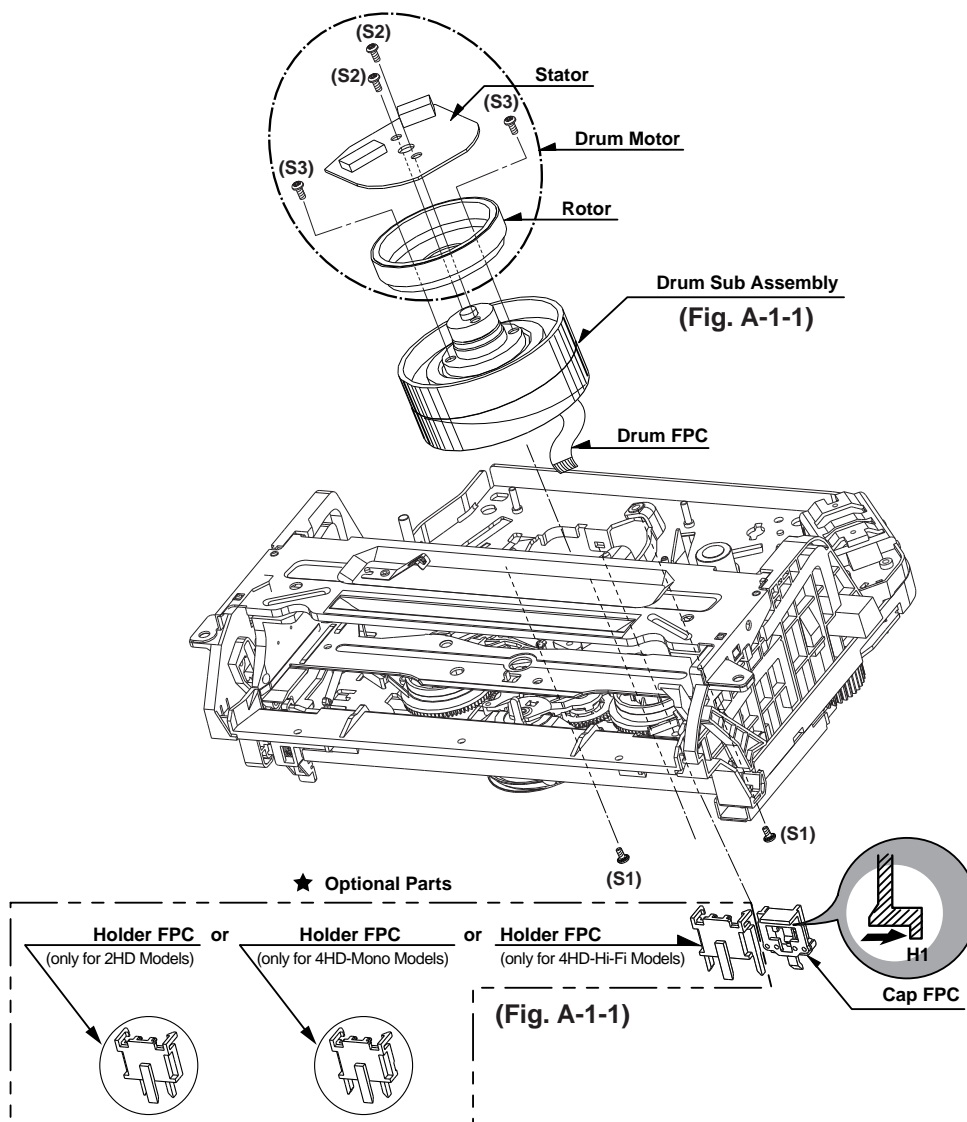


Fig. A-1


1. Drum Assembly (Fig. A-1-1)

- 1) Unhook the (H1) on the back side of the Chassis and separate the Cap FPC.
- 2) Remove three Screws (S1) and lift up the Drum Assembly.
- 3) Remove two Screws (S2) and Separate the Stator of Drum Motor.
- 4) Remove two Screws (S3) and Separate the Rotor of Drum Motor from the Drum Sub Assembly.


NOTE

- (1) When reassembling Cap FPC, two Holes of Drum FPC are inserted to the two Bosses of Holder FPC correctly. (Refer to Fig. B-1)

(Fig. B-1)

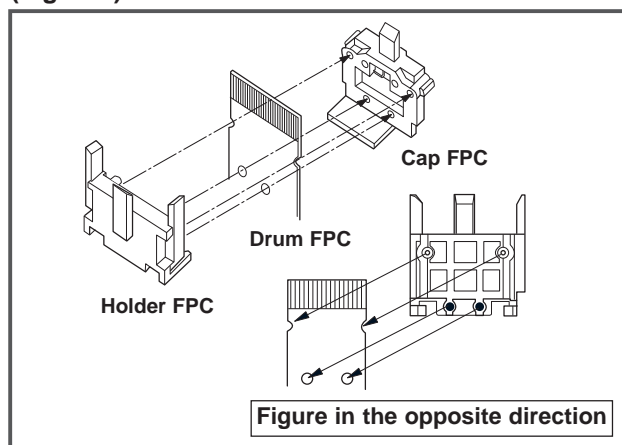

DECK MECHANISM DISASSEMBLY

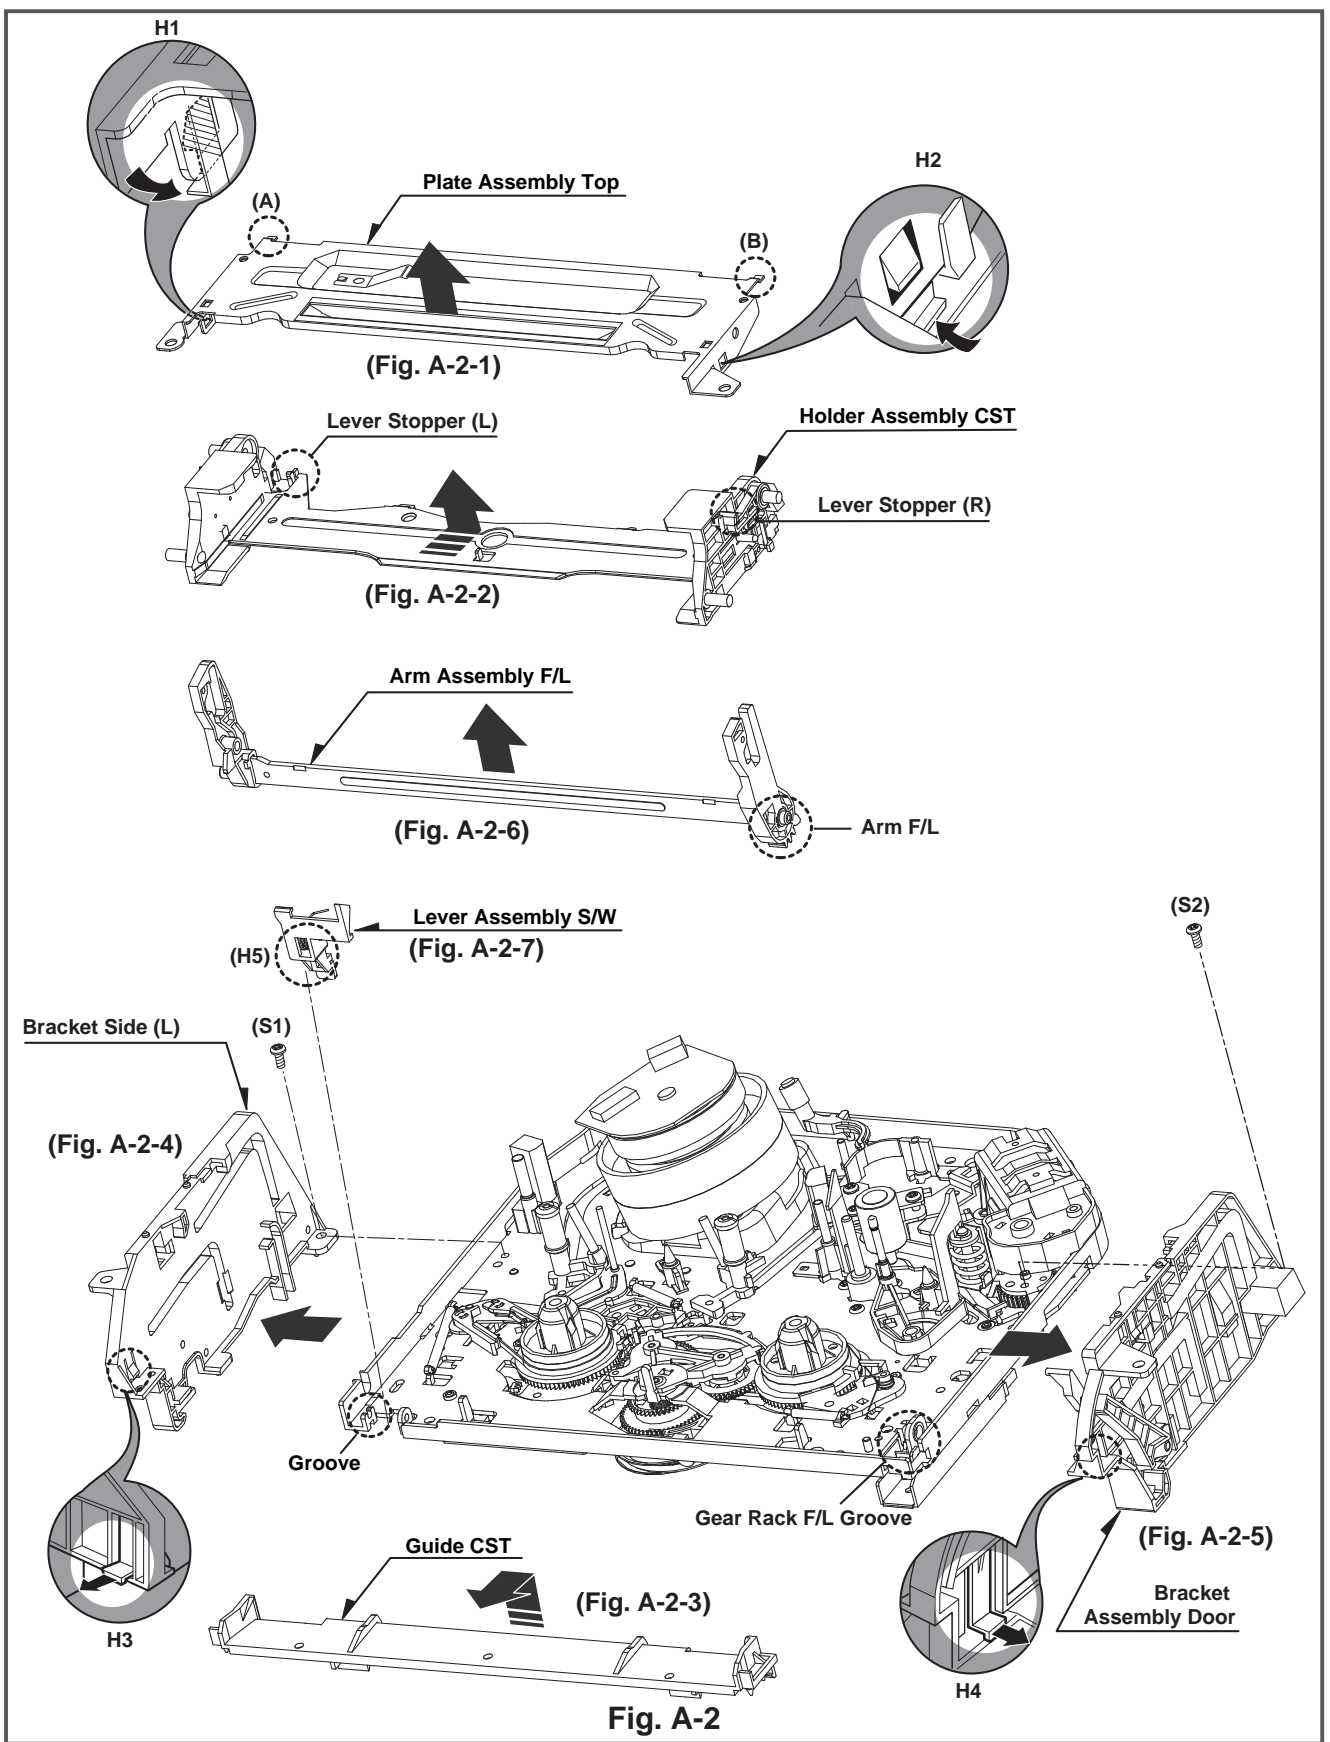

DECK MECHANISM DISASSEMBLY

2. Plate Assembly Top (Fig. A-2-1)


- 1) Unhook the (H1) and separate the Left Side.
- 2) Unhook the (H2) and lift up the Plate Assembly Top.

NOTE


- (1) When reassembling, confirm (A),(B) Part of the Plate Assembly Top is inserted to the (L),(R) Grooves of the Bracket Side(L) and Bracket Assembly Door.

3. Holder Assembly CST (Fig.A-2-2)

- 1) Push the Lever Stopper(L),(R) in the direction of the arrows (A), (B), and move the Holder Assembly CST.

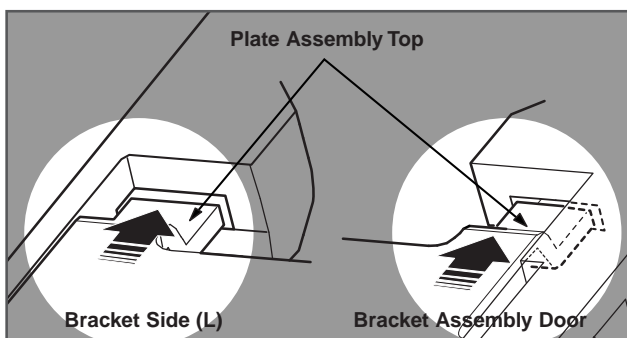


- 2) Push the Bracket Assembly Door to the right and lift up the Holder Assembly CST along the Guide Groove of the Bracket Assembly Door.

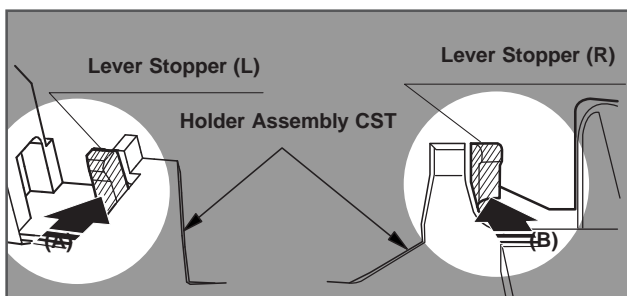

4. Guide CST (Fig.A-2-3)

- 1) Push two Hooks(H3),(H4) in the direction of the arrow and separate the left side.
- 2) Unhook (H5),(H6) as above No.1) and disassemble the Guide CST in the direction of the arrow.

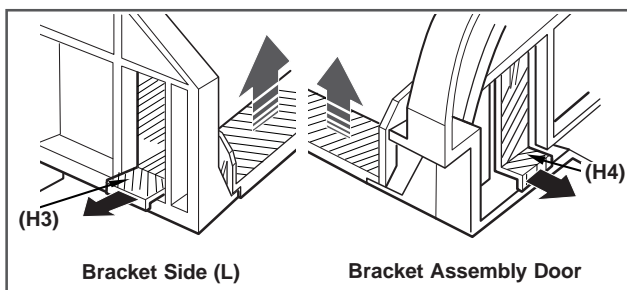

5. Bracket Side(L) (Fig. A-2-4)/ Bracket Assembly Door (Fig.A-2-5)

- 1) Remove the Screw (S1) and disassemble the Bracket Side(L) in the front.

- 2) Remove the Screw (S2) and disassemble the Bracket Assembly Door in the front.


6. Arm Assembly F/L (Fig. A-2-6)

- 1) Push the Arm Assembly F/L to the left and lift up it.


NOTE

- (1) When reassembling, confirm that the Gear(A) of the Arm F/L and the Gear(B) of the Gear Rack F/L are assembled as below.

7. Lever Assembly S/W (Fig. A-2-7)

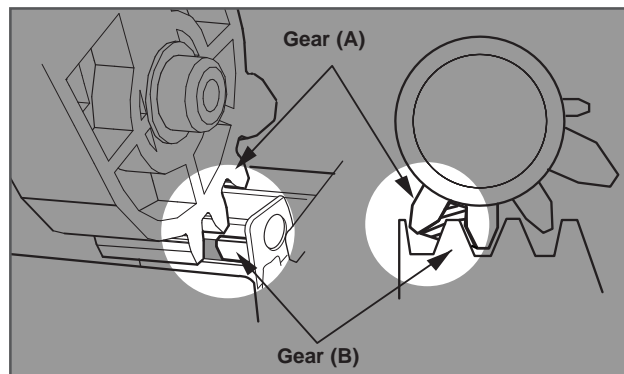


- 1) Hook the Spring Lever S/W on (H5).
- 2) Lift up the left side of the Lever S/W from the Groove(A) of the Chassis.

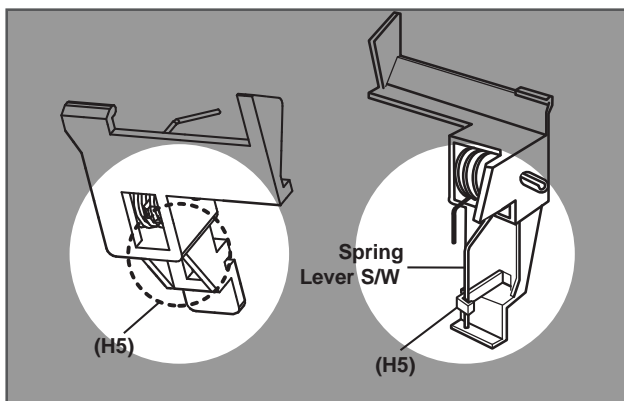

NOTE

- (1) Place the Spring Lever S/W of the above (No.1) as original position.

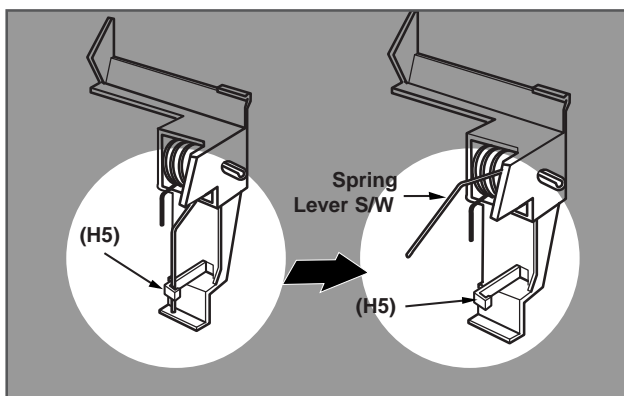

DECK MECHANISM DISASSEMBLY

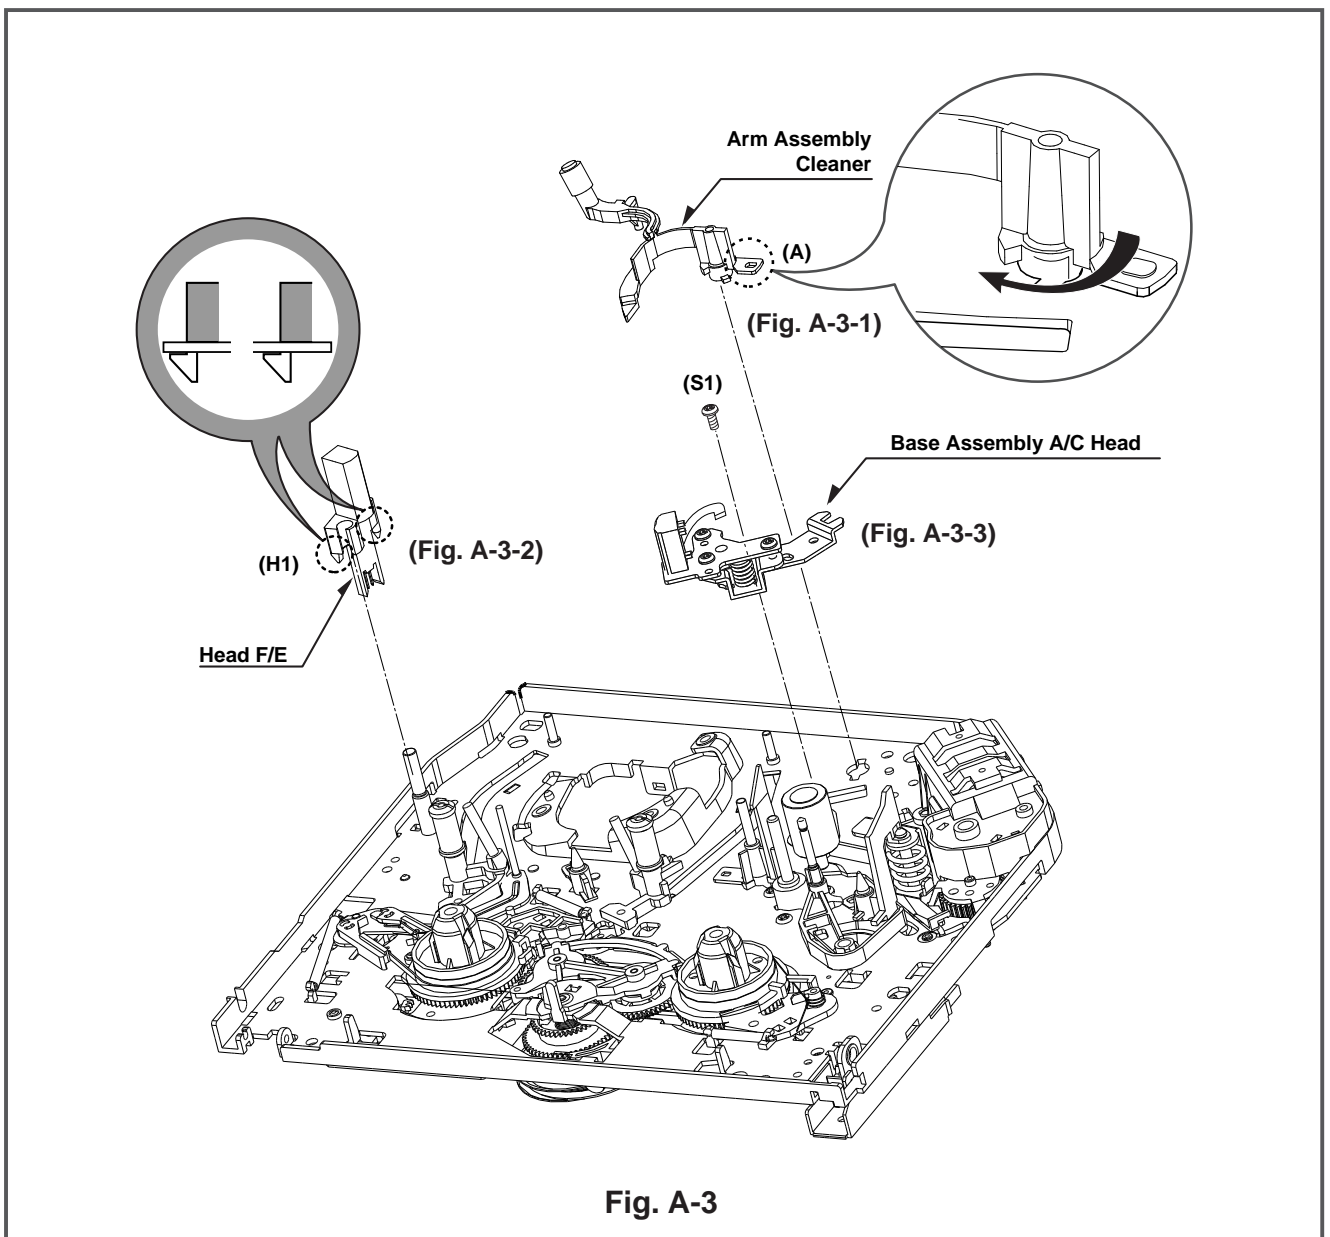


Fig. A-3

8. Arm Assembly Cleaner(Fig. A-3-1)

- 1) Break away the (A) part shown above Fig. A-3-1 from the Embossing of the Chassis in the clockwise direction and lift up the Arm Assembly Cleaner.

9. Head F/E (Fig. A-3-2)

- 1) Unhook the two Hooks (H1) on the back side of the Chassis and lift up the Head F/E.

10. Base Assembly A/C Head (Fig. A-3-3)

- 1) Remove the Screw (S1) and lift up the Base Assembly A/C Head.

DECK MECHANISM DISASSEMBLY

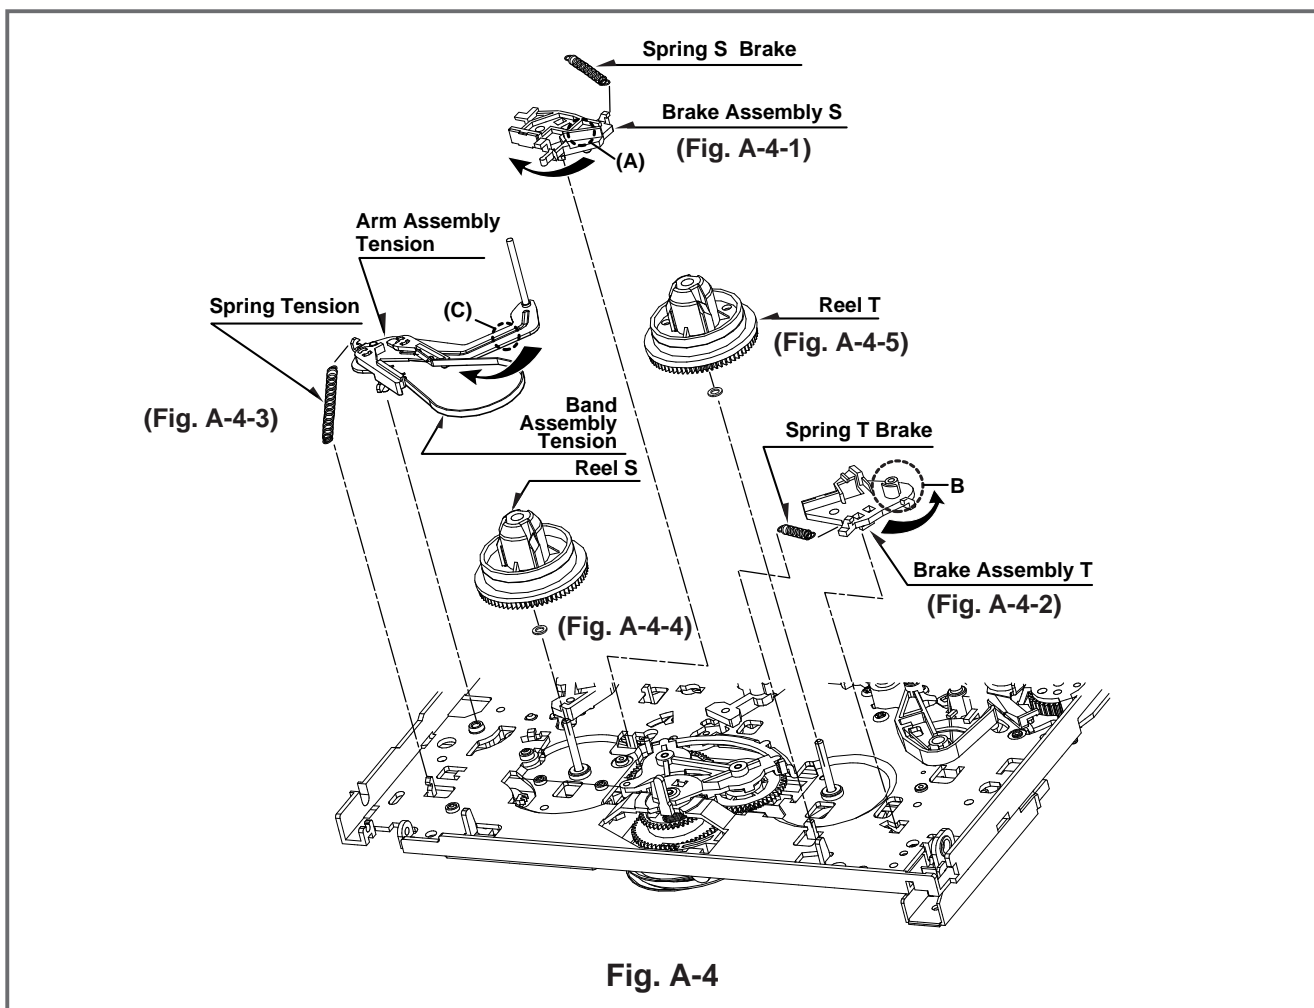


Fig. A-4

11. Brake Assembly S (Fig. A-4-1)

- 1) Remove the Spring S Brake.
- 2) Hold the (A) part shown above Fig. A-4-1 and turn to the clockwise direction, and then lift up the Brake Assembly S.

NOTE

- (1) When reassembling, be careful not to change the Spring with below No.12.(Refer to Fig. B-2).

12. Brake Assembly T (Fig. A-4-2)

- 1) Remove the Spring T Brake.
- 2) Hold the (B) part shown above Fig. A-4-2 and turn to the counterclockwise direction, and then lift up the Brake Assembly T.

NOTE

- (1) When reassembling, be careful not to change the Spring with above No.11.(Refer to Fig. B-2).

(Difference for Springs)

(Fig. B-2)

	Spring T Brake Color (Black)
	Spring S Brake
	Spring Tension

13. Arm Assembly Tension (Fig. A-4-3)

- 1) Remove the Spring Tension.
- 2) Hold the (C) part shown above Fig. A-4-3 and turn to the clockwise direction, and then lift up the Arm Assembly Tension.

NOTE


- (1) When reassembling, be careful not to change the Spring with above No.11,12.(Refer to Fig. B-2).

14. Reel S (Fig. A-4-4) & Reel T (Fig. A-4-5)

- 1) Lift up the Reel S and Reel T.

NOTE

- (1) When reassembling, be careful not to change the Reel S and Reel T each other.

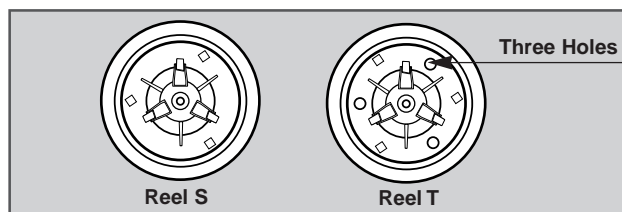

- (2) Confirm two Slide Washers under the Reel S and Reel T.

DECK MECHANISM DISASSEMBLY

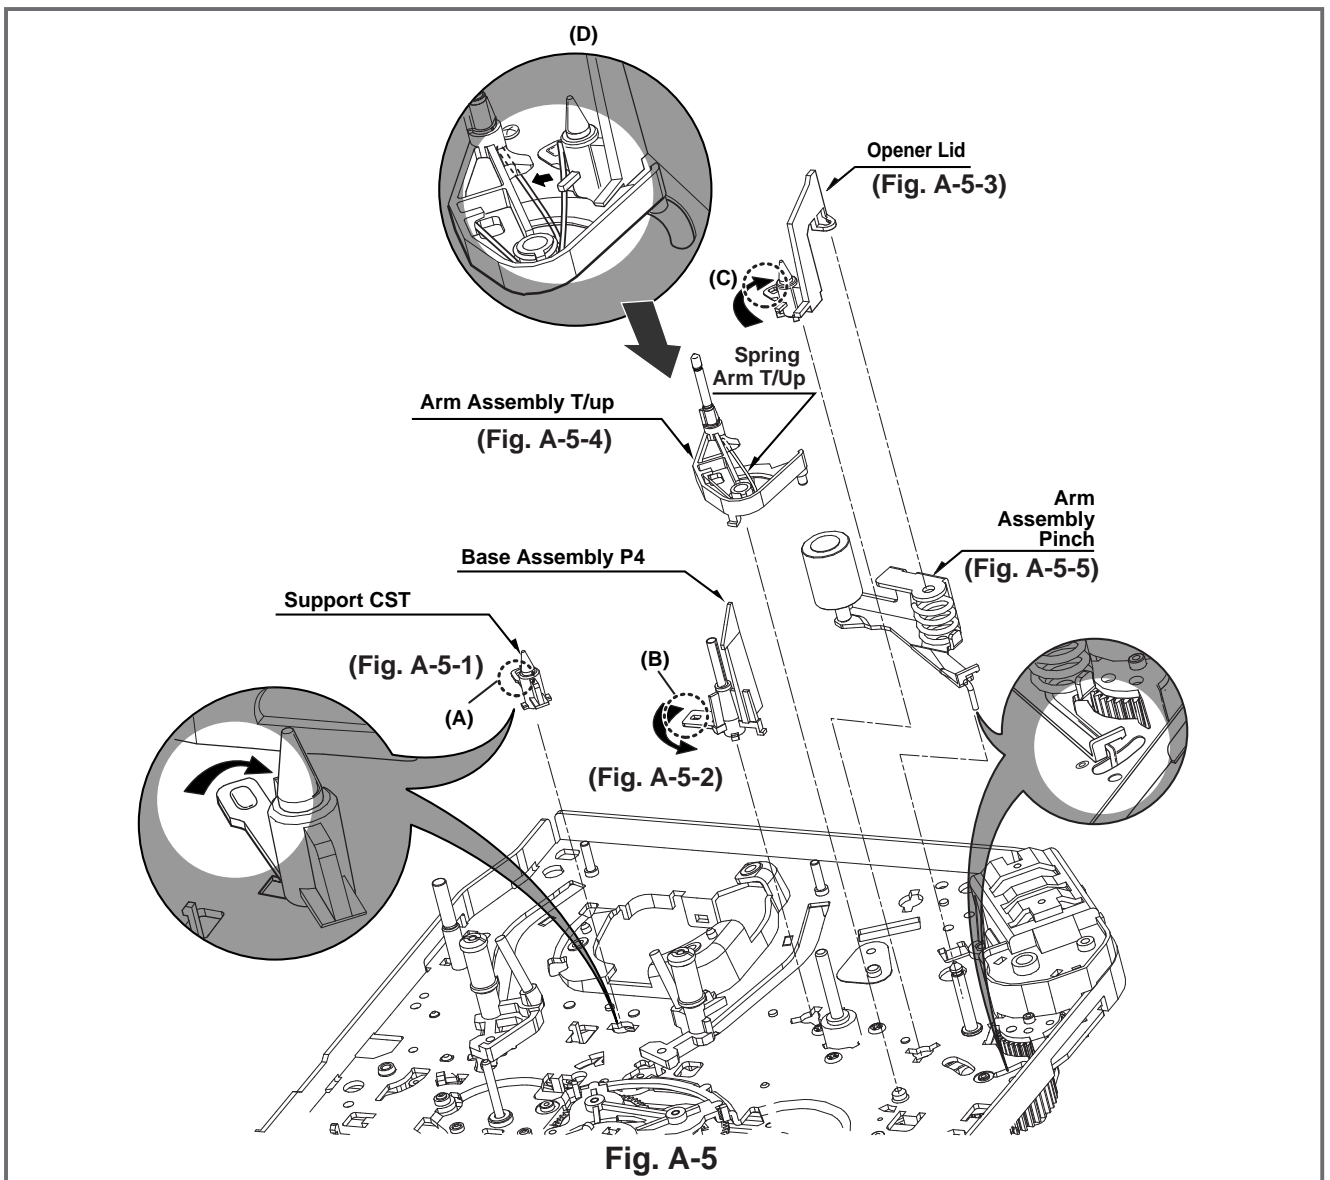


Fig. A-5

15. Support CST (Fig. A-5-1)

- 1) Break away the (A) part shown above Fig. A-5-1 from the Embossing of the Chassis in the clockwise direction, and lift up the Support CST.

16. Base Assembly P4 (Fig. A-5-2)

- 1) Break away the (B) part shown above Fig. A-5-2 from the Embossing of the Chassis in the counterclockwise direction and lift up the Base Assembly P4.

17. Opener Lid (Fig. A-5-3)

- 1) Hook the Spring Arm T/up on the Split digged under the Arm Assembly T/up.(Refer to Fig.A-5-4(D)).
- 2) Break away the (C) Part of the Opener Lid from the Embossing of the Chassis in the Clockwise direction and lift up the Opener Lid.


18. Arm Assembly T/up (Fig. A-5-4)

- 1) Confirm that the Spring Arm T/up is placed as above (No.17.1).

- 2) Lift up the Arm Assembly T/up.

NOTE


- (1) When reassembling, unhook the Spring Arm T/up Shown above (No.17.1) to the original position.

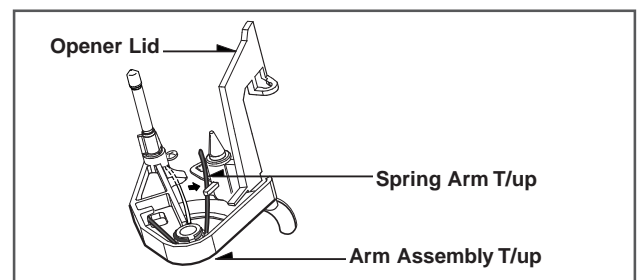

19. Arm Assembly Pinch (Fig. A-5-5)

- 1) Lift up the Arm Assembly Pinch.

DECK MECHANISM DISASSEMBLY

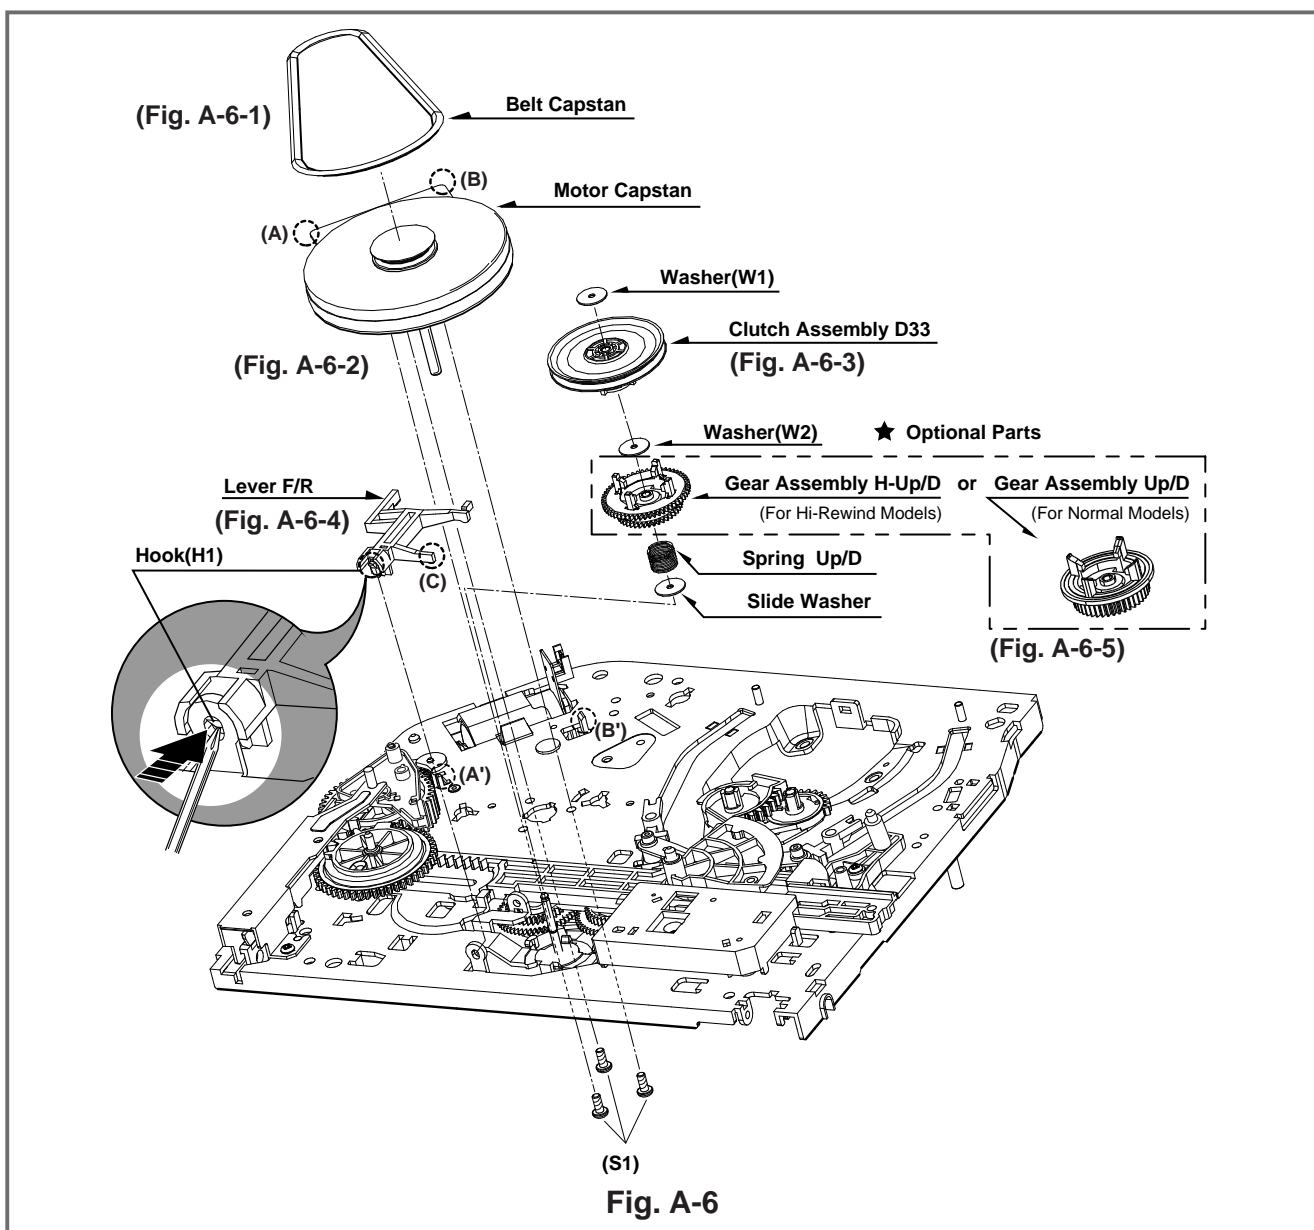

20. Belt Capstan (Fig. A-6-1)/ Motor Capstan (Fig. A-6-2)

- 1) Remove the Belt Capstan.
- 2) Remove three Screws(S1) on the back side of the Chassis and lift up the Motor Capstan.

NOTE

- (1) When reassembling, Confirm the (A), (B) parts of Motor Capstan is located to the (A'), (B') of the Chassis.

21. Clutch Assembly D33 (Fig. A-6-3)

- 1) Remove the Washer(W1) and lift up the Clutch Assembly D33.

22. Lever F/R (Fig. A-6-4)

- 1) Unhook the (H1) shown above Fig. A-6-4 and lift up the Lever F/R.

NOTE

- (1) When reassembling, move the (C) part of the Lever F/R up and down, then confirm if it is returned to original position.

23. Gear Assembly H-Up/D or Gear Assembly Up/D (Fig. A-6-5)

- 1) Remove the Washer(W2) and lift up the Gear Assembly H-up/D.
- 2) Remove the Spring Up/D.
- 3) Remove the Slide Washer.

NOTE

- (1) Gear Assembly H-Up/D is for Hi-Rewind Models.
- (2) Gear Assembly Up/D is for Normal Models except Hi-Rewind Models.

DECK MECHANISM DISASSEMBLY

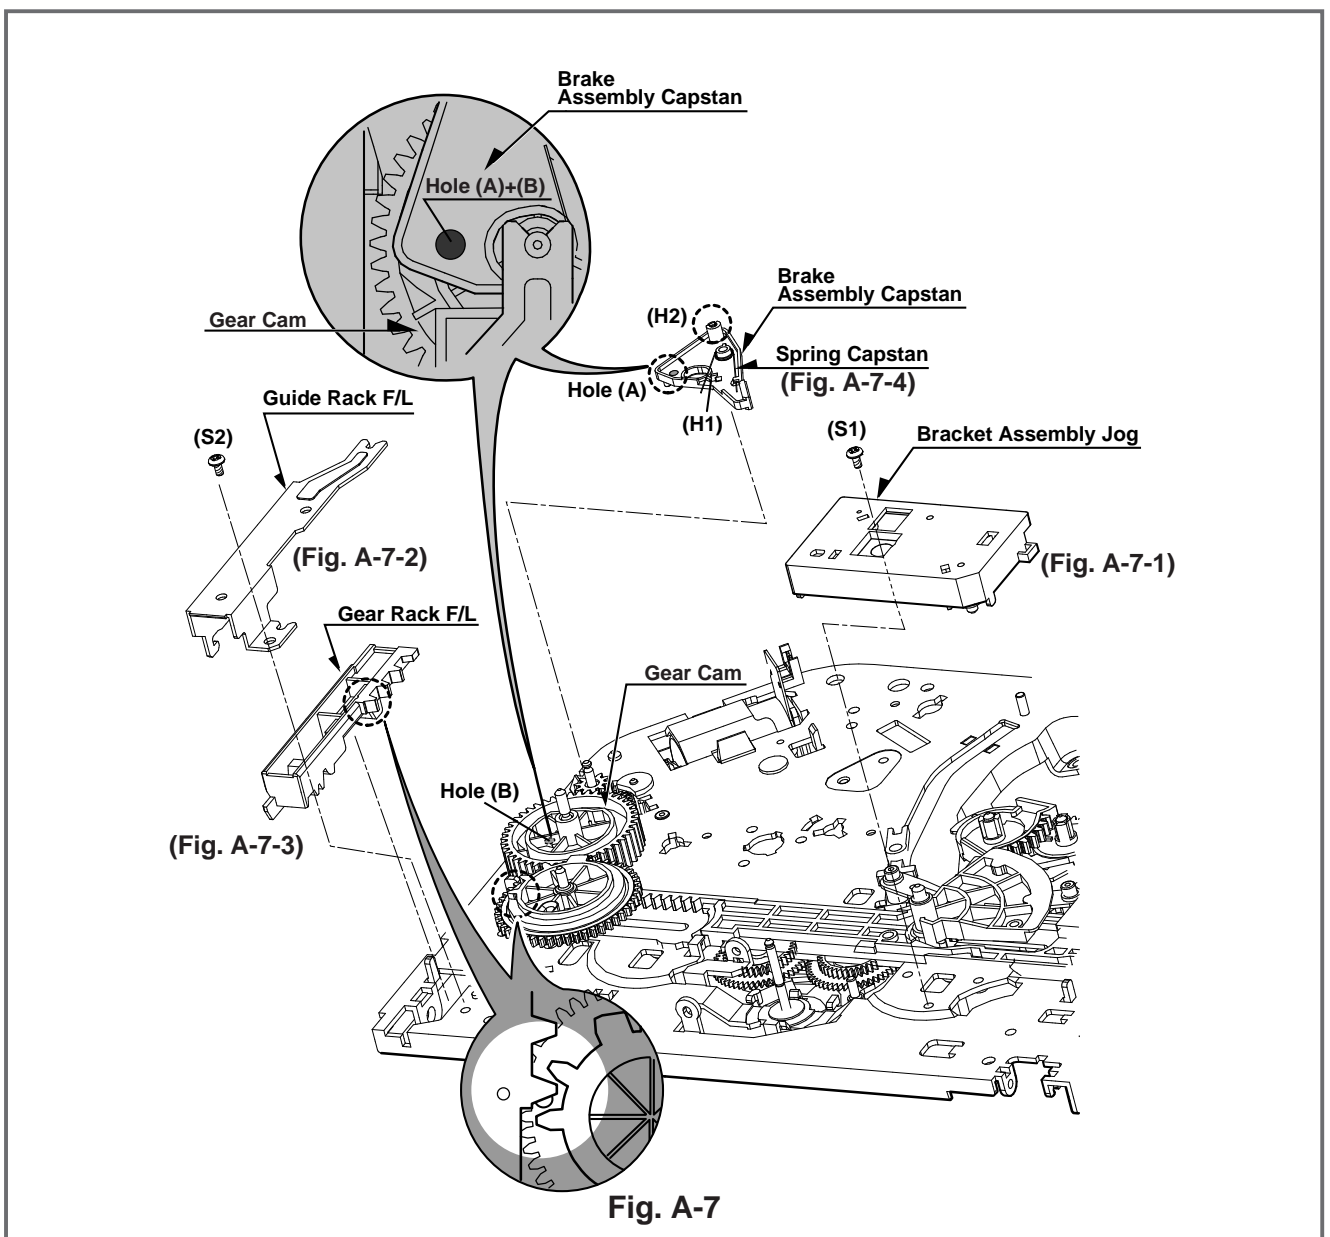


Fig. A-7

24. Bracket Assembly Jog (Fig. A-7-1)


- 1) Remove the Screw(S1) and lift up the Bracket Assembly Jog.

25. Guide Rack F/L (Fig. A-7-2)/ Gear Rack F/L (Fig. A-7-3)

- 1) Remove the Screw(S2) and lift up the Guide Rack F/L.
- 2) Lift up the Gear Rack F/L.

26. Brake Assembly Capstan (Fig. A-7-4)

- 1) Hook the Spring Capstan on the Hook(H1).
- 2) Unhook the Hook(H2) and lift up the Brake Assembly Capstan.(Refer to Fig. to the right)

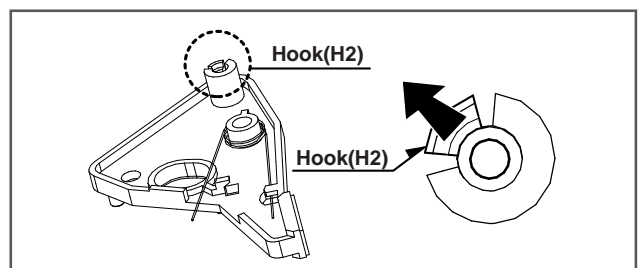

NOTE

- (1) When reassembling, confirm that the Hole(A) of the Brake Assembly Capstan is aligned to the Hole(B) of the Gear Cam.
(Refer to above Fig. A-7-4).

DECK MECHANISM DISASSEMBLY

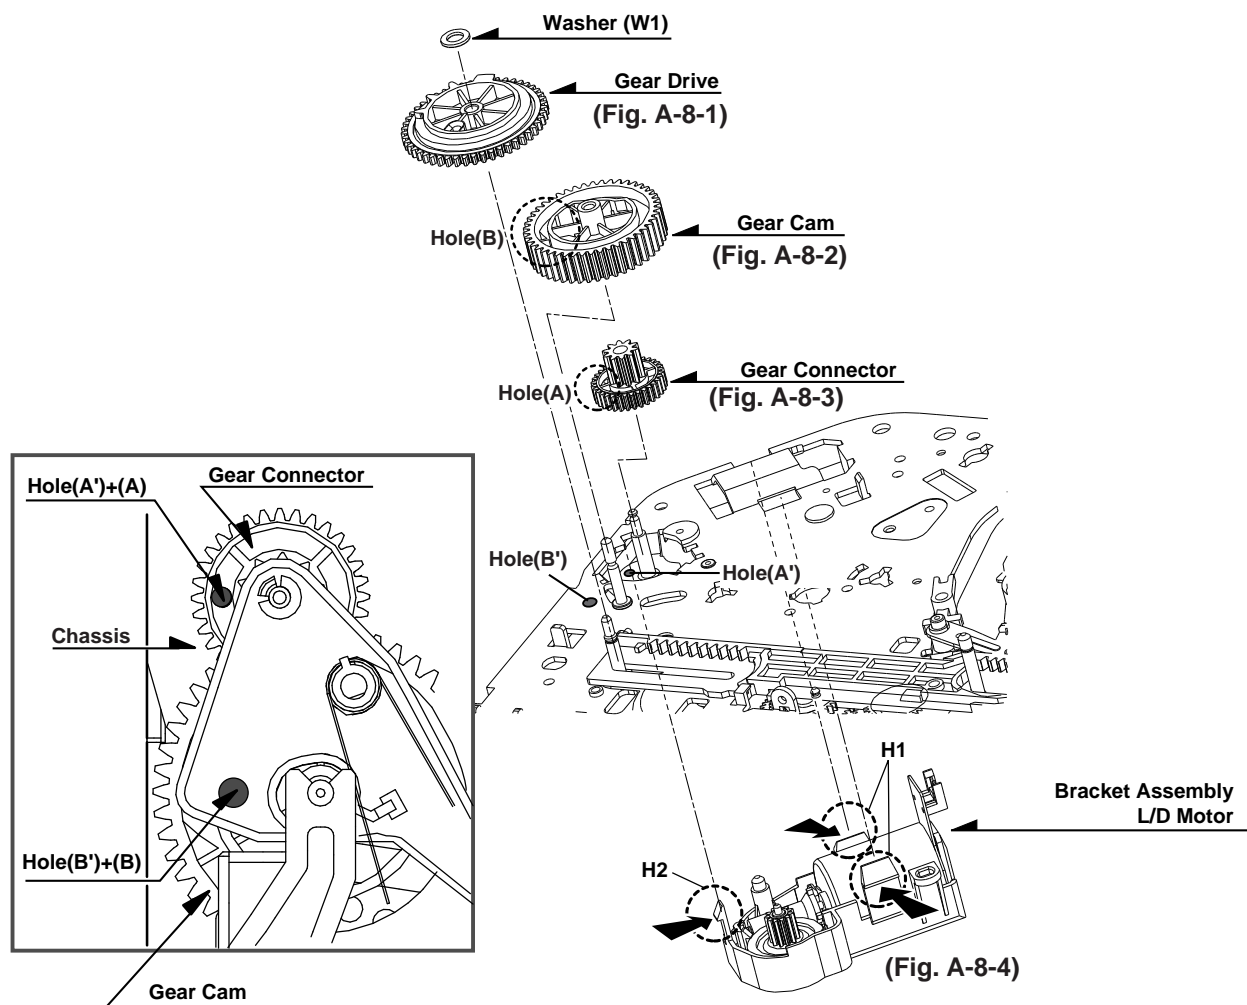


Fig. A-8


27. Gear Drive (Fig. A-8-1)/ Gear Cam (Fig. A-8-2)/ Gear Connector (Fig. A-8-3)

- 1) Remove the Washer(W1) and lift up the Gear Drive.
- 2) Lift up the Gear Cam.
- 3) Lift up the Gear Connector.

NOTE


- (1) When reassembling, confirm that the Hole (A) of the Gear Connector is aligned to the Hole (A') of the Chassis (Fig. A-8-3).
- (2) When reassembling, confirm that the Hole (B) of the Gear Cam is aligned to the Hole (B') of the Chassis (Fig. A-8-2).
- (3) When reassembling, confirm that the (C) part of the Gear Cam is aligned to the (D) part of the Gear Drive as shown Fig. B-3

(Fig. B-3)

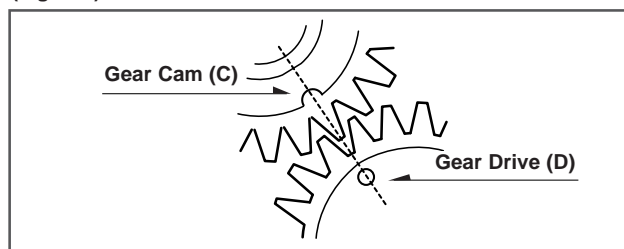


28. Bracket Assembly L/D Motor (Fig. A-8-4)

- 1) Unhook the three Hooks(H1),(H2) and push down the Bracket Assembly L/D Motor.

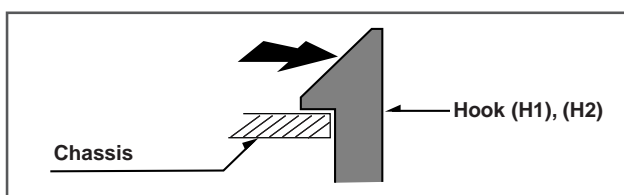

DECK MECHANISM DISASSEMBLY

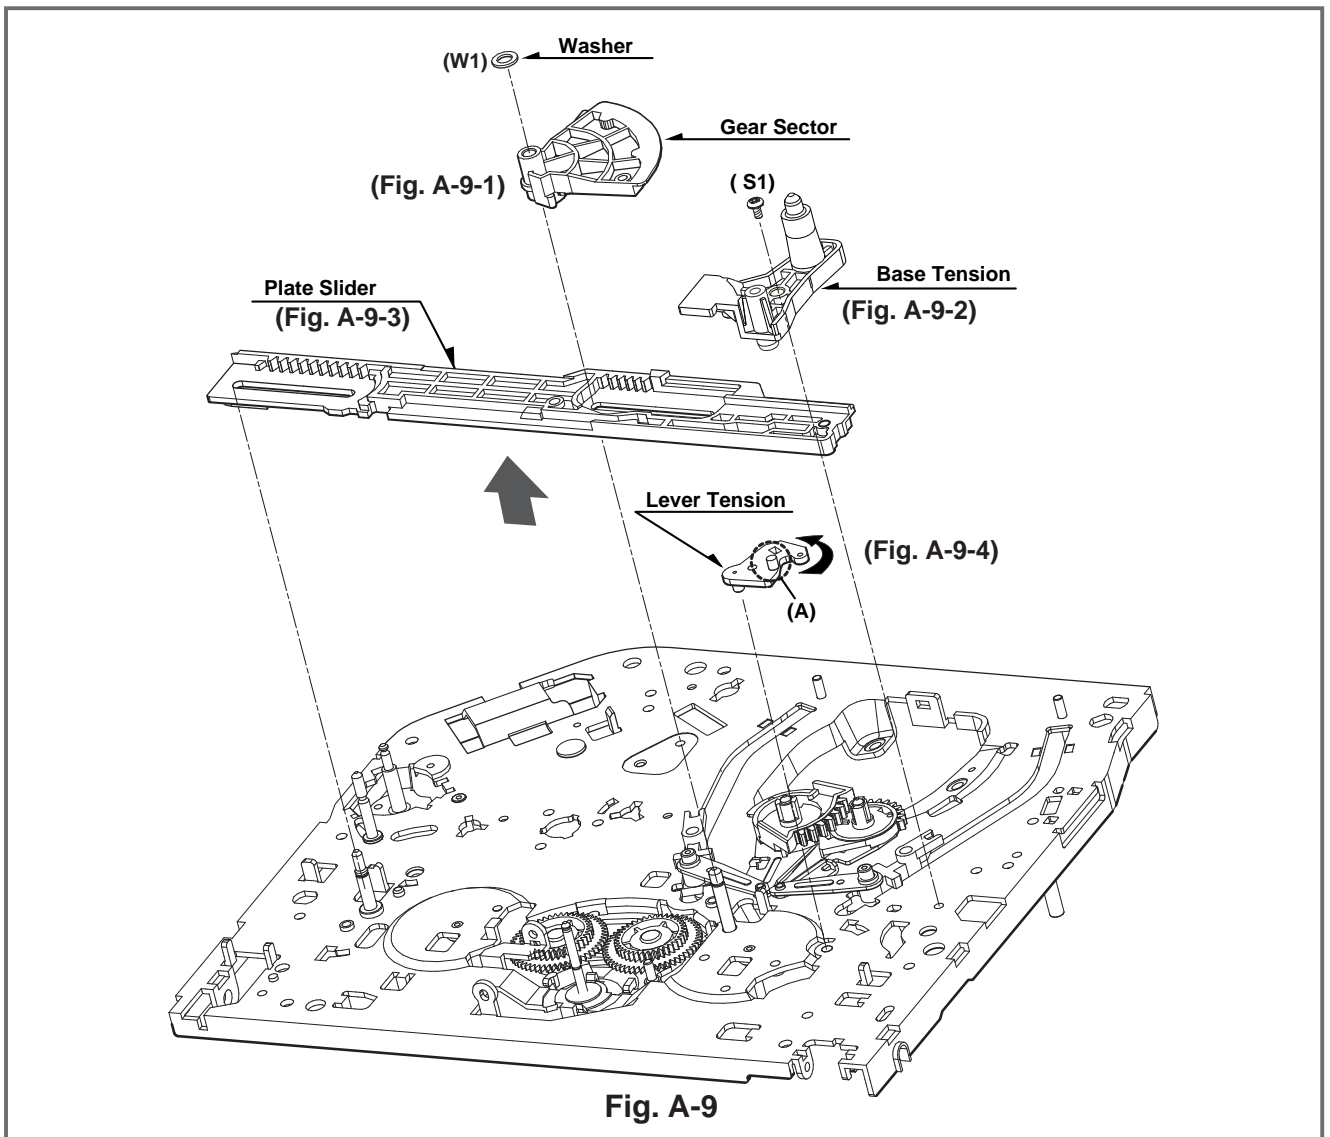

29. Gear Sector (Fig. A-9-1)

- 1) Remove the Washer(W1) and lift up the Gear Sector.

30. Base Tension (Fig. A-9-2)/ Plate Slider (Fig. A-9-3)/ Lever Tension (Fig. A-9-4)

- 1) Remove the Screw(S1) and lift up the Base Tension.
- 2) Lift up the Plate Slider.
- 3) Hold the (A) Part of the Lever Tension and turn to the counterclockwise direction, and then lift up the Lever Tension.

NOTE

- (1) When reassembling, turn the Lever Tension to the clockwise direction in maximum.

DECK MECHANISM DISASSEMBLY

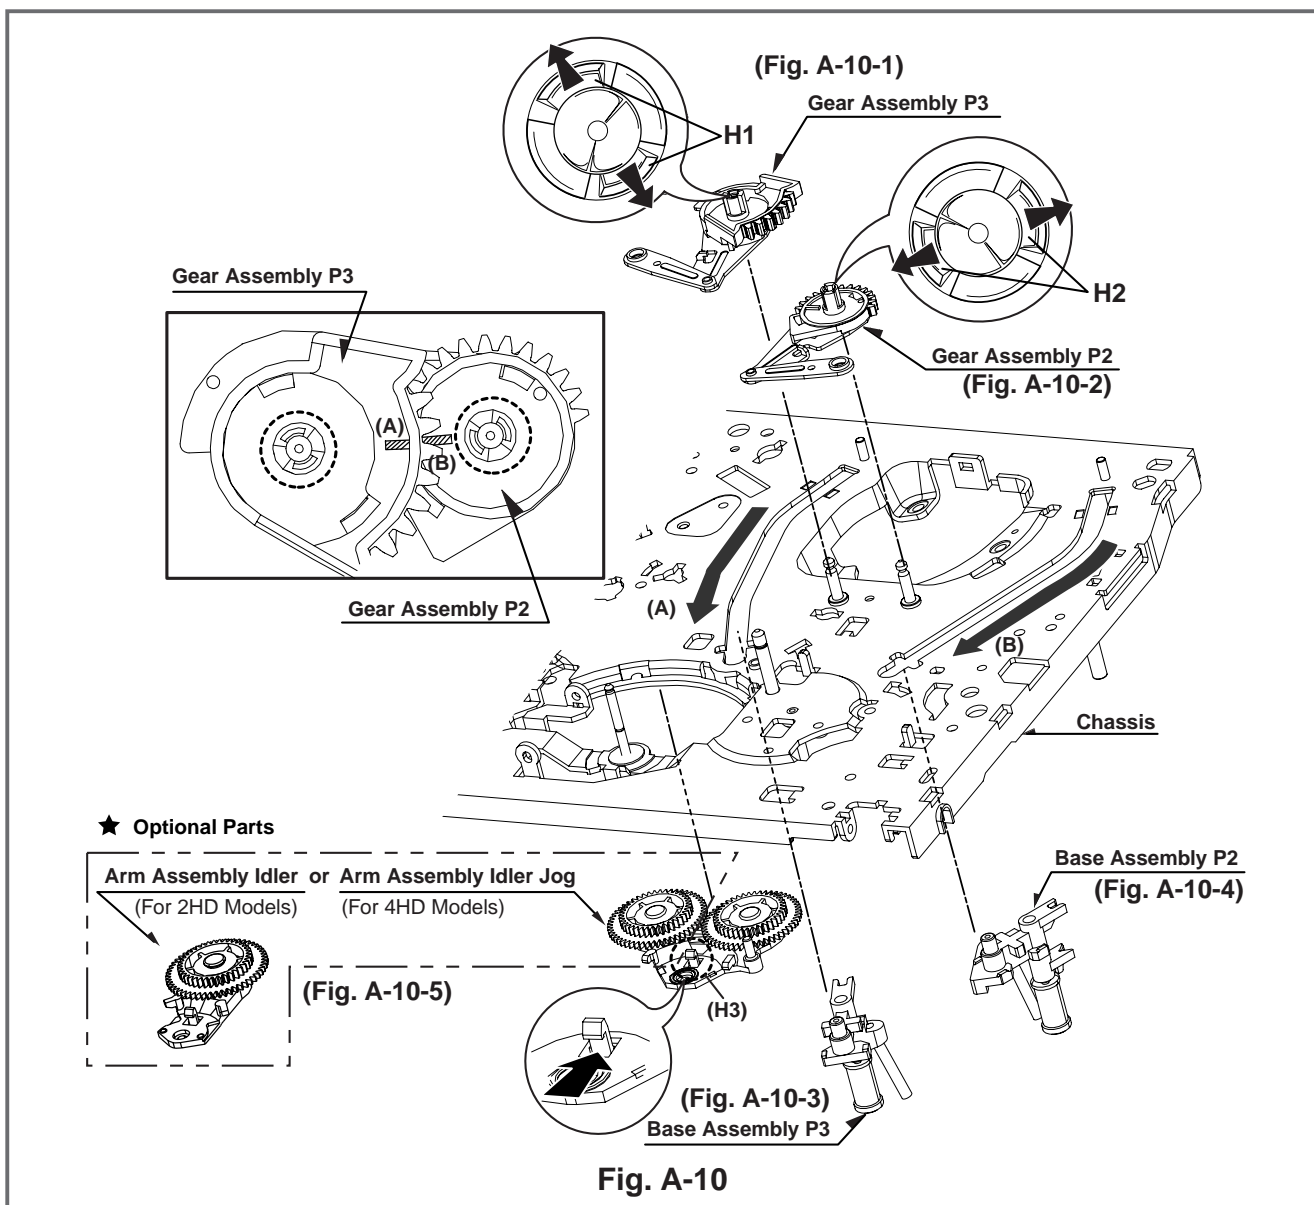


Fig. A-10

31. Gear Assembly P3 (Fig. A-10-1)/ Gear Assembly P2 (Fig. A-10-2)

- 1) Unhook the two Hooks(H1) and lift up the Gear Assembly P3.
- 2) Unhook the two Hooks(H2) and lift up the Gear Assembly P2.

32. Base Assembly P3 (Fig. A-10-3)/ Base Assembly P2 (Fig. A-10-4)

- 1) Move the Base Assembly P3 in the direction of the arrow of the Chassis Hole(A) and push down the Base Assembly P3.
- 2) Move the Base Assembly P2 in the direction of the arrow of the Chassis Hole(B) and push down the Base Assembly P2.

33. Arm Assembly Idler Jog or Arm Assembly Idler (Fig. A-10-5)


- 1) Unhook the Hook(H3) and push down the Arm Assembly Idler Jog.

NOTE

- 1) Arm Assembly Idler Jog is for 4HD Models.
- 2) Arm Assembly Idler is for 2HD Models.







NOTE

- 1) When reassembling, confirm that the (A) Part of the Gear Assembly P3 is aligned to the (B) Part of the Gear Assembly P2 as shown below.

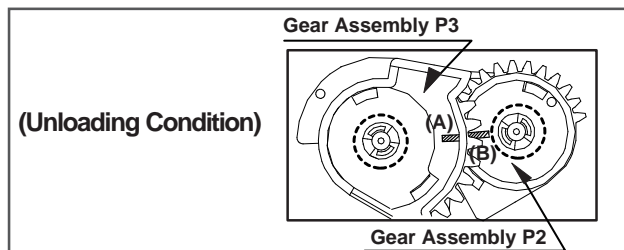

DECK MECHANISM ADJUSTMENT

• Tools and Fixfures for Service

<p>1. Cassette Torque meter SRK-VHT-303(Not SVC part) Parts No: D00-D006</p> 	<p>2. Alignment tape Parts No NTSC: DTN-001 PAL:DTN-0002</p> 	<p>3. Torque gauge 600g.Cm ATG Parts No:D00-D002</p> 
<p>4. Torque gauge adaptor Parts No:D09-R001</p> 	<p>5. Post height adjusting driver Parts No:DTL-0005</p> 	<p>6. + Type driver (ø 5)</p> 

DECK MECHANISM ADJUSTMENT


1.Mechanism Alignment Position Check

Purpose:To determine if the Mechanism is in the correct position, when a Tape is ejected.

Test Equipment/ Fixture	Test Conditions (Mechanism Condition)	Check Point
• Blank tape	• Eject Mode (with Cassette ejected)	• Mechanism and Mode Switch Position

- 1) Turn the Power S/W on and eject the Cassette by pressing the Eject Button.
- 2) Remove the Top Cover and Plate Assembly Top, visually check if the Gear Cam Hole is aligned with the Chassis Hole as below Fig. C-2.
- 3) IF not, rotate the Shaft of the Loading Motor to either Clockwise or Counterclockwise until the Alignment is as below Fig. C-2.
- 4) Remove the Screw which fixes the Deck Mechanism and Main Frame and confirm if the Gear Cam is aligned with the Gear Drive as below Fig. C-1(A).
- 5) Confirm if the Mode S/W on the Main P.C.Board is aligned as below Fig. C-1(B).
- 6) Remount the Deck Mechanism on the Main P.C.Board and check each operation.

CHECK DIAGRAM

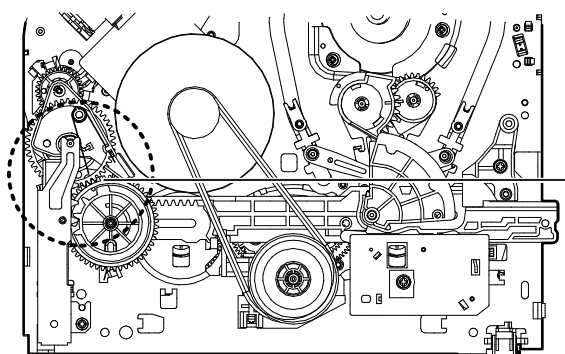

BOTTOM VIEW


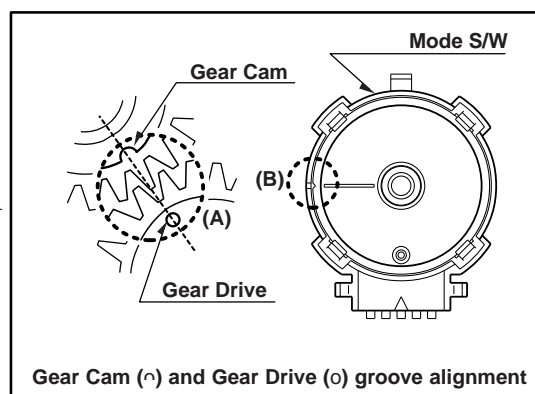


Fig. C-1

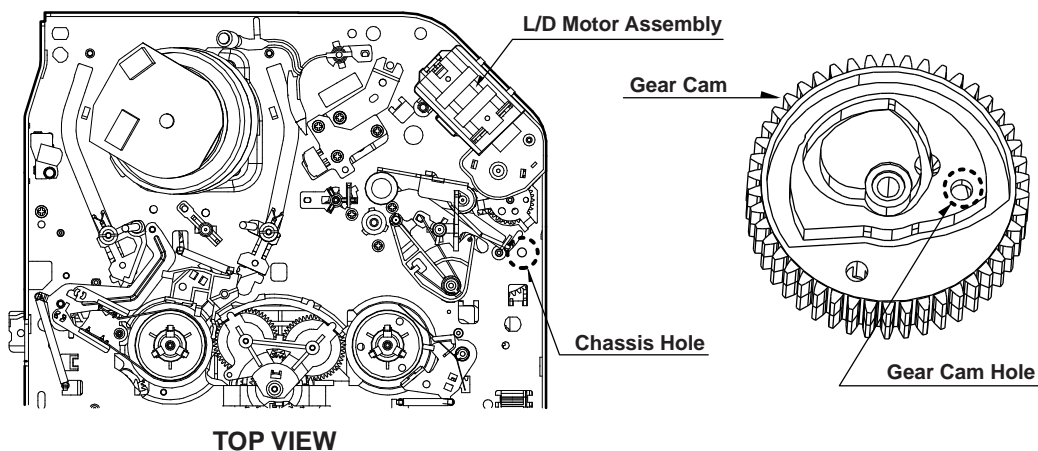

TOP VIEW

Fig. C-2

DECK MECHANISM ADJUSTMENT

2. Preparation for Adjustment (To set the Deck Mechanism to the Loading state without inserting a Cassette Tape).

- 1) Unplug the Power Cord from the AC Outlet.
- 2) Disassemble the Top Cover and Plate Assembly Top.
- 3) Plug the Power Cord into the AC Outlet.
- 4) Turn the Power S/W on and push the Lever Stopper (L),(R) of the Holder Assembly CST to the back for Loading the Cassette without

Tape.

Cover the Holes of the End Sensors at the both sides of the Bracket Side(L) and Bracket Assembly Door to prevent a light leak.

Then The Deck Mechanism drives to the Stop Mode.

In this case, The Deck Mechanism can accept inputs of each mode, however the Rewind and Review Operation can not be performed for more than a few seconds because the Take-up Reel Table is in the Stop State and can not be detected the Reel Pulses.

3. Checking Torque

Purpose: To insure smooth Transport of the Tape during each Mode of Operation.

If the Tape Transport is abnormal, then check the Torque as indicated by the chart below.

Test Equipment/ Fixture		Test Conditions (Mechanism Condition)	Checking Method	
<ul style="list-style-type: none"> • Torque Gauge(600g/cm ATG) • Torque Gauge Adaptor • Cassette Torque Meter SRK-VHT-303 		• Play (FF) or Review (REW) Mode	<ul style="list-style-type: none"> • Perform each Deck Mechanism Mode without inserting a Cassette Tape(Refer to above No.2 Preparation for Adjustment). • Read the Measurement of the Take-up or Supply Reels on the Cassette Torque Meter(Fig. C-3-2). • Attach the Torque Gauge Adaptor to the Torque Gauge and then read the Value of it(Fig. C-3-1). 	
Item	Mode	Test Equipment	Measurement Reel	Measurement Values
Fast Forward Torque	Fast Forward	Cassette Torque Gauge	Take-Up Reel	More than 400g/cm
Rewind Torque	Rewind	Cassette Torque Gauge	Supply Reel	More than 400g/cm
Play Take-Up Torque	Play	Cassette Torque Meter	Take-Up Reel	75~115g/cm
Review Torque	Review	Cassette Torque Meter	Supply Reel	130~200g/m

NOTE:

The Values are measured by using a Torque Gauge and Torque Gauge Adaptor with the Torque Gauge affixed.

• Cassette Torque Meter (SRK-VHT-303)

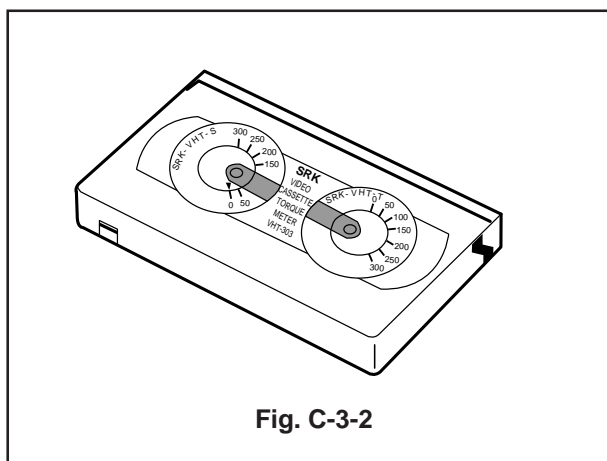


Fig. C-3-2

NOTE:

The Torque reading to measure occurs when the Tape abruptly changes direction from Fast Forward of Rewind Mode, when quick bracking is applied to both Reels.

• Torque Gauge (600g.cm ATG)

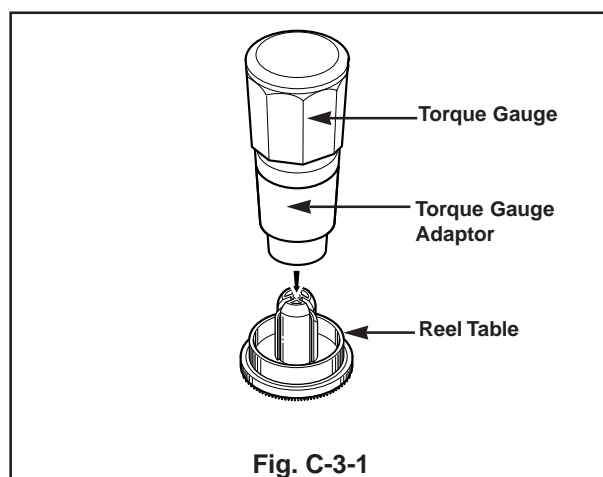


Fig. C-3-1


DECK MECHANISM ADJUSTMENT

4. Guide Roller Height Adjustment

Purpose: To regulate the Height of the Tape so that the Bottom of the Tape runs along the Tape Guide Line on the Lower Drum.


4-1. Preliminary Adjustment


Test Equipment/ Fixture	Test Conditions (Mechanism Condition)	Adjustment Point
• Post Height Adjusting Driver	• Play or Review Mode	• Guide Roller Height Adjustment screws on the Supply and Take-Up Guide Rollers.

Adjustment Procedure <ol style="list-style-type: none"> 1) Confirm if the Tape runs along the Tape Guide Line of the Lower Drum. 2) If the Tape runs the Bottom of the Guide Line, turn the Guide Roller Height Adjustment Screw to Clockwise direction. 3) If it runs the Top, turn to Counterclockwise direction. 4) Adjust the Height of the Guide Roller to be guided to the Guide Line of the Lower Drum from the Starting and Ending Point of the Drum. 	ADJUSTMENT DIAGRAM  <p>Fig. C-4-1</p>
--	---

4-2. Precise Adjustment

Test Equipment/Fixture	Test Equipment Connection Points	Test Conditions VCR(VCP) State	Adjustment Point
• Oscilloscope • Alignment Tape • Post Height Adjusting Driver	• CH-1:PB RF Envelope • CH-2:NTSC: SW 30Hz PAL: SW 25Hz • Head Switching Output Point • RF Envelope Output Point	• Play an Alignment Tape	• Guide Roller Height Adjustment Screws

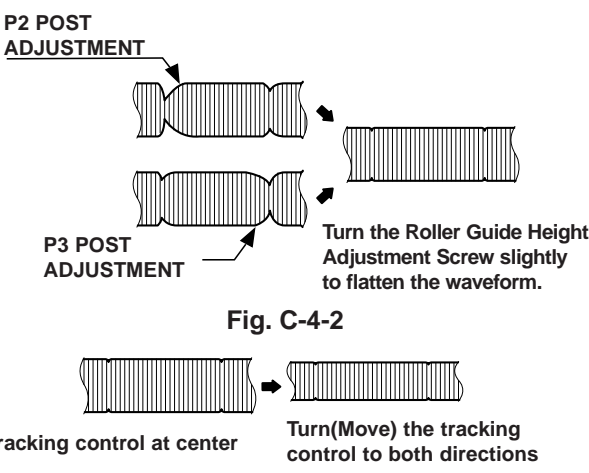Adjustment Procedure <ol style="list-style-type: none"> 1) Play an Alignment Tape after connecting the Probe of the Oscilloscope to the RF Envelope Output Test Point and Head Switching Output Test Point. 2) Tracking Control(in PB Mode) : Center Position(When this Adjustment is performed after the Drum Assembly has been replaced, set the Tracking Control so that the RF Output is Maximum). 3) Height Adjustment Screw : Flatten the RF Waveform. (Fig. C-4-2) 4) Turn(Move) the Tracking Control(in PB Mode) Clockwise and Counterclockwise.(Fig. C-4-3) 5) Check that any Drop of RF Output is uniform at the Start and End of the Waveform. 	Waveform Diagrams  <p>Fig. C-4-2</p> <p>Fig. C-4-3</p>
---	---

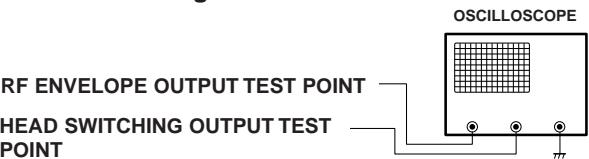NOTE If the adjustment is excessive or insufficient the tape will jam or fold.	Connection Diagram 
--	--

DECK MECHANISM ADJUSTMENT

5. Audio/Control (A/C) Head Adjustment

Purpose: To insure that the Tape passes accurately over the Audio and Control Tracks in exact Alignment in both the Record and Playback Modes.

5-1. Preliminary Adjustment (Height and Tilt Adjustment)

Perform the Preliminary Adjustment, when there is no Audio Output Signal with the Alignment Tape.

Test Equipment/ Fixture	Test Conditions (Mechanism Condition)	Adjustment Point
<ul style="list-style-type: none"> Blank Tape Screw Driver(+) Type 5mm 	<ul style="list-style-type: none"> Play the blank tape 	<ul style="list-style-type: none"> Tilt Adjustment Screw(C) Height Adjustment Screw(B) Azimuth Adjustment Screw(A)

Adjustment Procedure/Diagrams

- Initially adjust the Base Assembly A/C Head as shown Fig. C-5-1 by using the Height Adjustment Screw(B).
- Play a Blank Tape and observe if the Tape passes accurately over the A/C Head without Tape Curling or Folding.
- If Folding or Curling is occurred then adjust the Tilt Adjustment Screw(C) while the Tape is running to resemble Fig. C-5-3.

- Reconfirm the Tape Path after Playback about 4~5 seconds.

NOTE

Ideal A/C head height occurs, when the tape runs between 0.2~0.25mm above the bottom edge of the A/C head core.

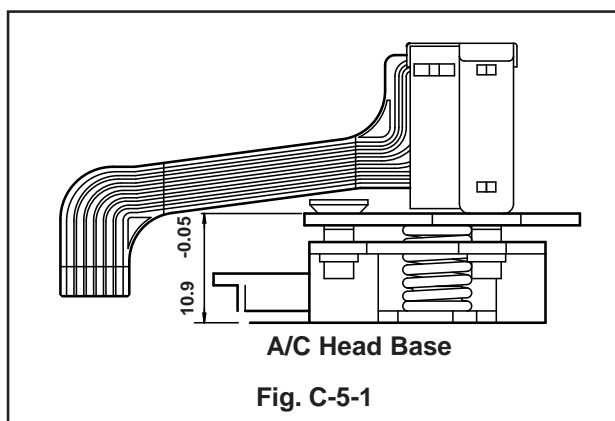


Fig. C-5-1

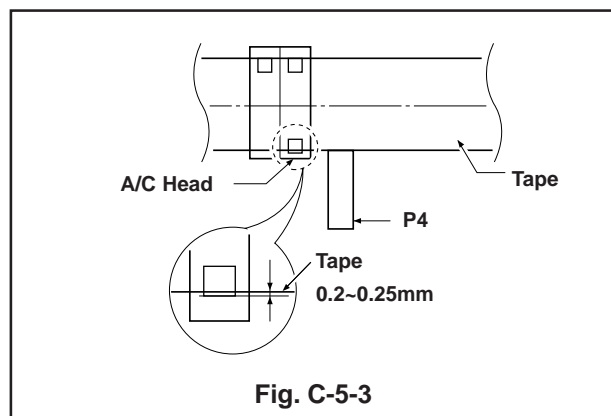


Fig. C-5-3

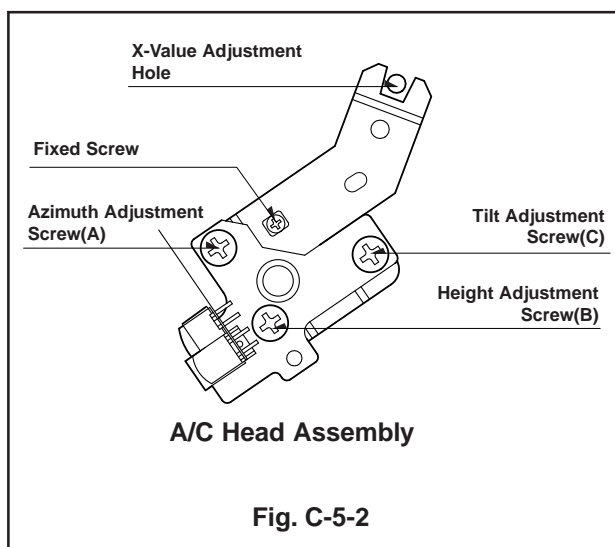


Fig. C-5-2

DECK MECHANISM ADJUSTMENT

5-2. Confirm that the Tape passes smoothly between the Take-up Guide and Pinch Roller(using a Mirror or the naked eye).



- 1) After completing Step 5-1.(Preliminary Adjustment), check that the Tape passes around the Take-up Guide and Pinch Roller without Folding or Curling at the Top or Bottom.
 - (1) If Folding or Curling is observed at the Bottom of the Take-up Guide then slowly turn the Tilt Adjustment Screw(C) in the Clockwise direction.
 - (2) If Folding or Curling is observed at the Top of it then

slowly turn the Tilt Adjustment Screw(C) in the Counterclockwise direction.

NOTE:




Check the RF Envelope after adjusting the A/C Head, if the RF Waveform differs from Fig. C-5-4, perform Precise Adjustment to flat the RF Waveform.

5-3. Precise Adjustment (Azimuth adjustment)

Test Equipment/ Fixture	Connection Point	Test Conditions (Mechanism Condition)	Adjustment Point
<ul style="list-style-type: none"> Oscilloscope Alignment Tape(SP) Screw Driver(+) Type 5mm 	<ul style="list-style-type: none"> Audio output jack 	<ul style="list-style-type: none"> Play an Alignment Tape 1KHz, 7KHz Sections 	<ul style="list-style-type: none"> Azimuth Adjustment Screw(A) Height Adjustment Screw(B)
Adjustment Procedure <ol style="list-style-type: none"> Connect the Probe of the Oscilloscope to Audio Output Jack. Alternately adjust the Azimuth Adjustment Screw(A) and the Tilt Adjustment Screw(C) for Maximum Output of the 1KHz and 7KHz segments, while maintaining the flattest Envelope differential between the two Frequencies. 			
			
Fig. C-5-4			



6. X-Value Adjustment

Purpose: To obtain compatibility with other VCR(VCP) Models.

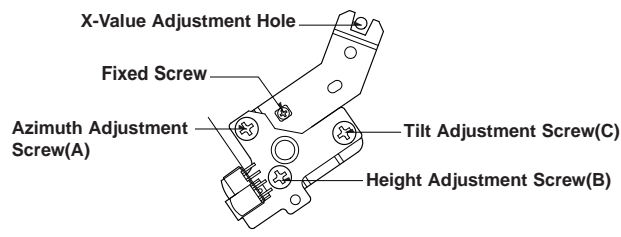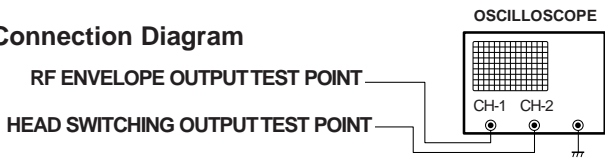Test Equipment/ Fixture	Connection Point	Test Conditions (Mechanism Condition)	Adjustment Point
<ul style="list-style-type: none"> Oscilloscope Alignment tape(SP only) Screw Driver(+) Type 5mm 	<ul style="list-style-type: none"> CH-1: PB RF Envelope CH-2: NTSC: SW 30Hz PAL: SW 25Hz Head Switching Output Test Point RF Envelope Output Test Point 	<ul style="list-style-type: none"> Play an Alignment Tape 	
Adjustment Procedure <ol style="list-style-type: none"> Release the Automatic Tracking to run long enough for Tracking to complete its Cycle. Loosen the Fixed Mounting Screw and move the Base Assembly A/C Head in the direction as shown in the Diagram to find the center of the peak that allows for the maximum Waveform Envelope. This method should allow the 31um Head to be centrally located over the 58um Tape Track. Tighten the Base Assembly A/C Head mounting Screw. 		Adjustment Diagram 	
		Connection Diagram 	

DECK MECHANISM ADJUSTMENT

7. Adjustment after Replacing Drum Assembly (Video Heads)

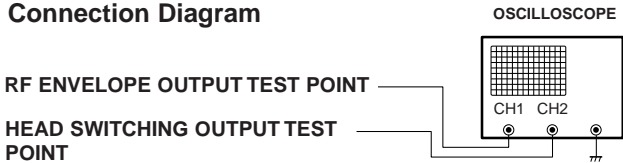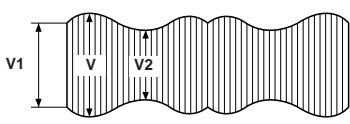Purpose: To correct for shift in the Roller Guide and X value after replacing the Drum.			
Test Equipment/ Fixture	Connection Point	Test Conditions (Mechanism Condition)	Adjustment Points
<ul style="list-style-type: none"> Oscilloscope Alignment tapes Blank Tape Post Height Adjusting Driver Screw Driver(+) Type 5mm 	<ul style="list-style-type: none"> CH-1: PB RF Envelope CH-2: NTSC: SW 30Hz PAL: SW 25Hz Head Switching Output Test Point RF Envelope Output Test Point 	<ul style="list-style-type: none"> Play the blank tape Play an alignment tape 	<ul style="list-style-type: none"> Guide Roller Precise Adjustment Switching Point Tracking Preset X-Value
Checking/Adjustment Procedure Play a blank tape and check for tape curling or creasing around the roller guide. If there is a problem then follow the procedure 4. "Guide Roller Height" and 5. "Audio Control(A/C) Head Adjustment".		Connection Diagram  Waveform $V1/V \text{ MAX} \leq 0.7$ $V2/V \text{ MAX} \leq 0.8$ RF ENVELOPE OUTPUT  Fig. C-7	

8. Check the Tape Travel after Reassembling Deck Assembly.

8-1.Check Audio and RF Locking Time during playback and after CUE or REV (FF/REW)

Test Equipment/ Fixture	Specification	Connection Points	Test Conditions (Mechanism Condition)
<ul style="list-style-type: none"> Oscilloscope Alignment tapes(with 6H 3kHz Color Bar Signal) Stop Watch 	<ul style="list-style-type: none"> RF Locking Time: Less than 5 sec. Audio Locking Time:Less than 10sec 	<ul style="list-style-type: none"> CH-1: PB RF Envelope CH-2: Audio Output RF Envelope Output Point Audio Output Jack 	<ul style="list-style-type: none"> Play an alignment tape (with 6H 3kHz Color Bar Signal)
Checking Procedure Play an alignment tape then change the operating mode to CUE or REV and confirm if the unit meets the above listed specifications.		NOTES: <ol style="list-style-type: none"> CUE is fast forward mode (FF) REV is the rewind mode (REW) Referenced to the Play mode 	

8-2.Check for tape curling or jamming

Test Equipment/ Fixture	Specification	Test Conditions (Mechanism Condition)
<ul style="list-style-type: none"> T-160 Tape T-120 Tape 	<ul style="list-style-type: none"> Be sure there is no tape jamming or curling at the beginning, middle or end of the tape. 	<ul style="list-style-type: none"> Run the CUE, REV play mode at the beginning and the end of the tape.
Checking Procedure <ol style="list-style-type: none"> Confirm that the tape runs smoothly around the roller guides, drum and A/C head assemblies while abruptly changing operating modes from Play to CUE or REV. This is to be checked at the beginning, middle and end sections of the cassette. Confirm that the tape passes over the A/C head assembly as indicated by proper audio reproduction and proper tape counter performance. 		

MAINTENANCE/INSPECTION PROCEDURE

1 Check before starting repairs

The following faults can be remedied by cleaning and oiling. Check the needed lubrication and the conditions of cleanliness in the unit.

Check with the customer to find out how often the unit is used, and then determine that the unit is ready for inspection and maintenance. Check the following parts.

Phenomenon	Inspection	Replacement
Color beats	Dirt on full-erase head	o
Poor S/N, no color	Dirt on video head	o
Vertical or Horizontal jitter	Dirt on video head Dirt on tape transport system	o
Low volume, Sound distorted	Dirt on Audio/control head	o
Tape does not run. Tape is slack	Dirt on pinch roller	o
In Review and Unloading (off mode), the Tape is rolled up loosely.	Clutch Ass'y S27 Torque reduced	o
	Cleaning Drum and transport system	Fig. C-9-3

NOTE

If locations marked with o do not operate normally after cleaning, check for wear and replace.

See the EXPLODED VIEWS at the end of this manual as well as the above illustrations See the Greasing (Page 4-22) for the sections to be lubricated and greased.

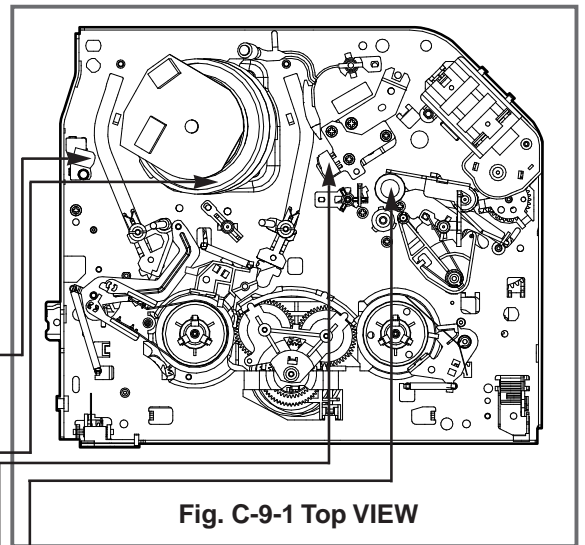


Fig. C-9-1 Top VIEW

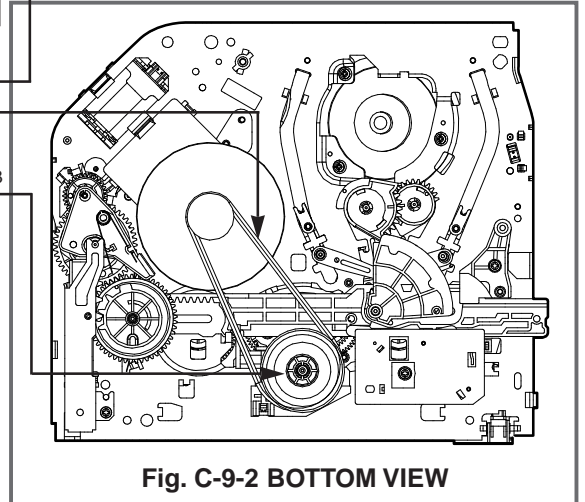


Fig. C-9-2 BOTTOM VIEW

* No. (1)~(13) Indicates the Tape Path to be traveled from Supply Reel to Take-up Reel.

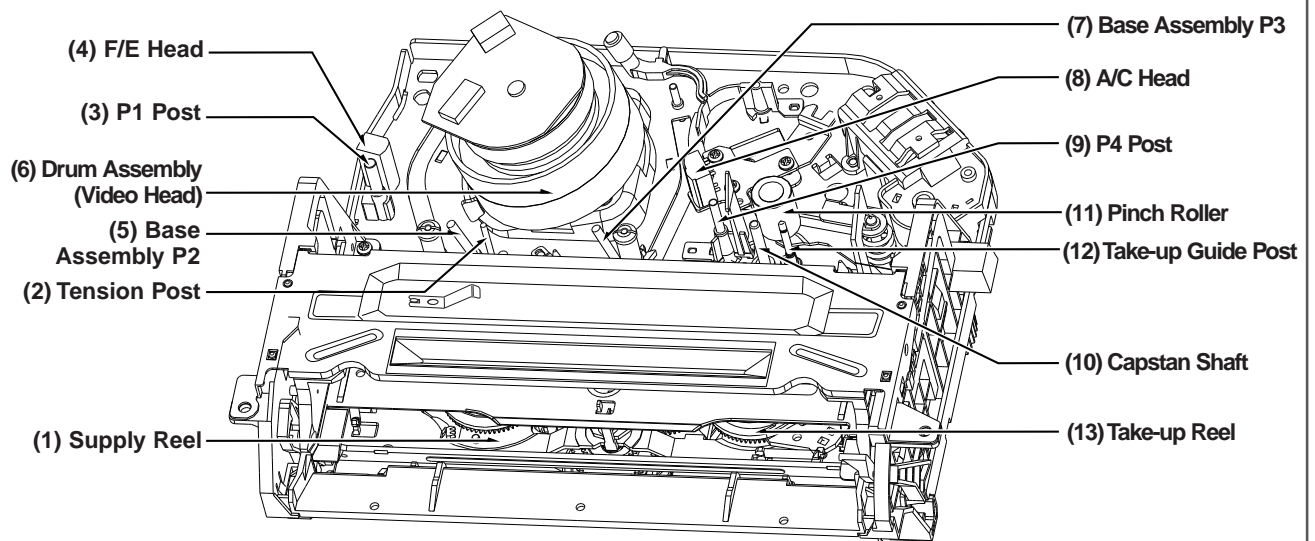


Fig. C-9-3 Tape Transport System

MAINTENANCE/INSPECTION PROCEDURE

2. Required Maintenance

The recording density of a VCR(VCP) is much higher than that of an audio tape recorder. VCR(VCP) components must be very precise, at tolerances of 1/1000mm, to ensure compatibility with other VCRs. If any of these components are worn or dirty, the symptoms will be the same as if the part is defective. To ensure a good picture, periodic inspection and maintenance, including replacement of worn out parts and lubrication, is necessary.

3. Scheduled Maintenance

Schedules for maintenance and inspection are not fixed because they vary greatly according to the way in which the customer uses the VCR(VCP), and the environment in which the VCR(VCP) is used.

But, in general home use, a good picture will be maintained if inspection and maintenance is made every 1,000 hours. The table below shows the relation between time used and inspection period.

Table 1

When inspection is necessary Average hours used per day	About 1 year	About 18 months	About 3 years
One hour			
Two hours			
Three hours			

4. Supplies Required for Inspection and Maintenance

- (1) Grease : Kanto G-311G (Blue) or equivalent
- (2) Isopropyl Alcohol or equivalent
- (3) Cleaning Patches
- (4) Grease : Kanto G-381(Yellow) : Used only for Reel S and Reel T

5) Maintenance Procedure

5-1) Cleaning

- (1) Cleaning video head

First use a cleaning tape. If the dirt on the head is too stubborn to remove by tape, use the cleaning patch. Coat the cleaning patch with Isopropyl Alcohol. Touch the cleaning patch to the head tip and gently turn the head(rotating cylinder) right and left.

(Do not move the cleaning patch vertically. Make sure that only the buckskin on the cleaning patch comes into contact with the head. Otherwise, the head may be damaged.)

Thoroughly dry the head. Then run the test tape. If Isopropyl Alcohol remains on the video head, the tape may be damaged when it comes into contact with the head surface.

- (2) Clean the tape transport system and drive system, etc, by wiping with a cleaning patch wetted with Isopropyl Alcohol.

NOTES:

- ① It is the tape transport system which comes into contact with the running tape. The drive system consists of those parts which moves the tape.
- ② Make sure that during cleaning you do not touch the tape transport system with the tip of a screw driver and no that force is that would cause deforming or damage applied to the system.

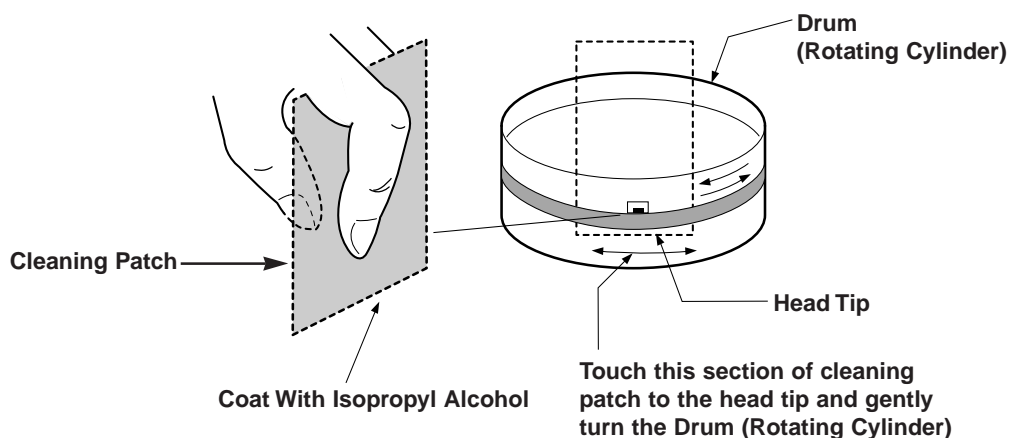


Fig. C-9-4

MAINTENANCE/INSPECTION PROCEDURE


5-2) Greasing

(1) Greasing guidelines



Apply grease, with a cleaning patch. Do not use excess grease. It may come into contact with the tape transport or drive system. Wipe any excess and clean with cleaning patch wetted in Isopropyl Alcohol.

NOTE: Greasing Points

- | | |
|-----------------------------------|---|
| 1) Loading Path Inside & Top side | 6) Shaft |
| 2) Base Tension Boss inside Hole | 7) Arm Assembly F/L of Buming Inside Hole |
| 3) Arm Assembly F/L "U" Groove | 8) Reel S, T Shaft (G381:Yellow) |
| 4) Arm Take-up Rubbing Section | 9) Brake T Groove |
| 5) L/D Motor Worm Wheel Part | |

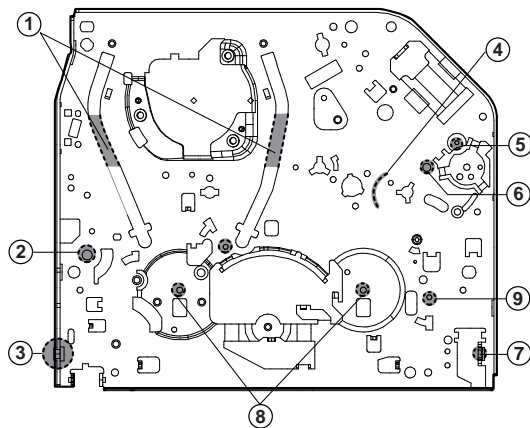

Chassis (Top)

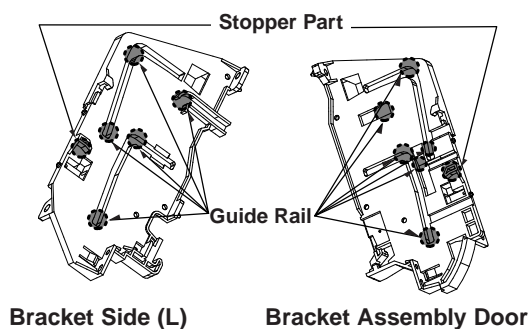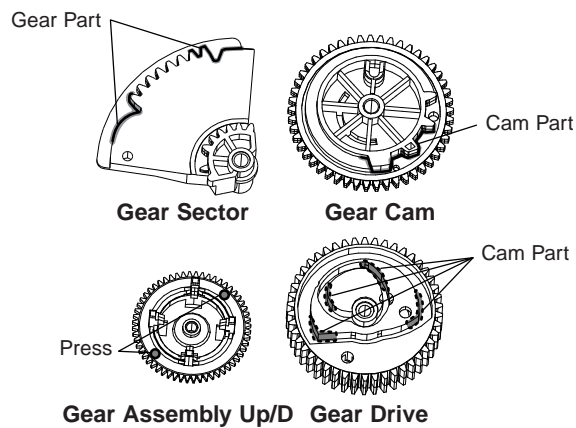


Bracket Side (L)

Bracket Assembly Door


(2) Periodic greasing

Grease specified locations every 5,000 hours.

- | | |
|-----------------------------------|------------------------------|
| 1) Loading Path Inside & Top side | 5) Lever Tension Groove |
| 2) Shaft | 6) Clutch Assembly D33 Shaft |
| 3) Gear Rack F/L Moving Section | 7) Brake "S" Rubbing Section |
| 4) Shaft | |

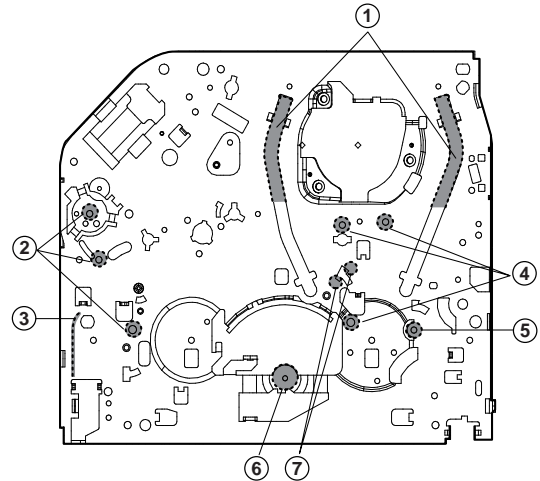

Chassis (Bottom)

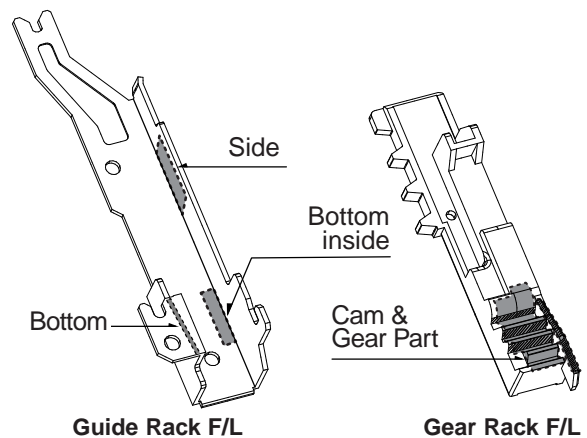

Guide Rack F/L

Gear Rack F/L

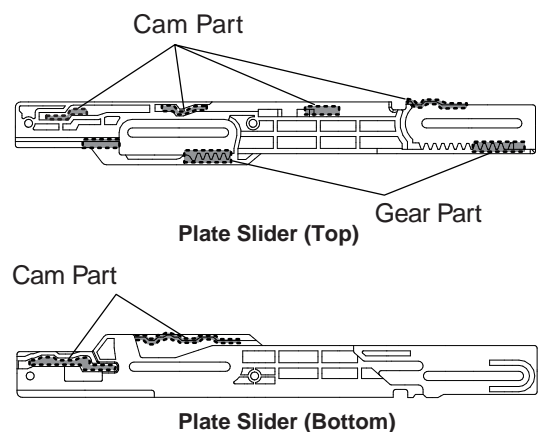



Plate Slider (Top)

Plate Slider (Bottom)


MECHANISM TROUBLESHOOTING GUIDE

1. Deck Mechanism

A.

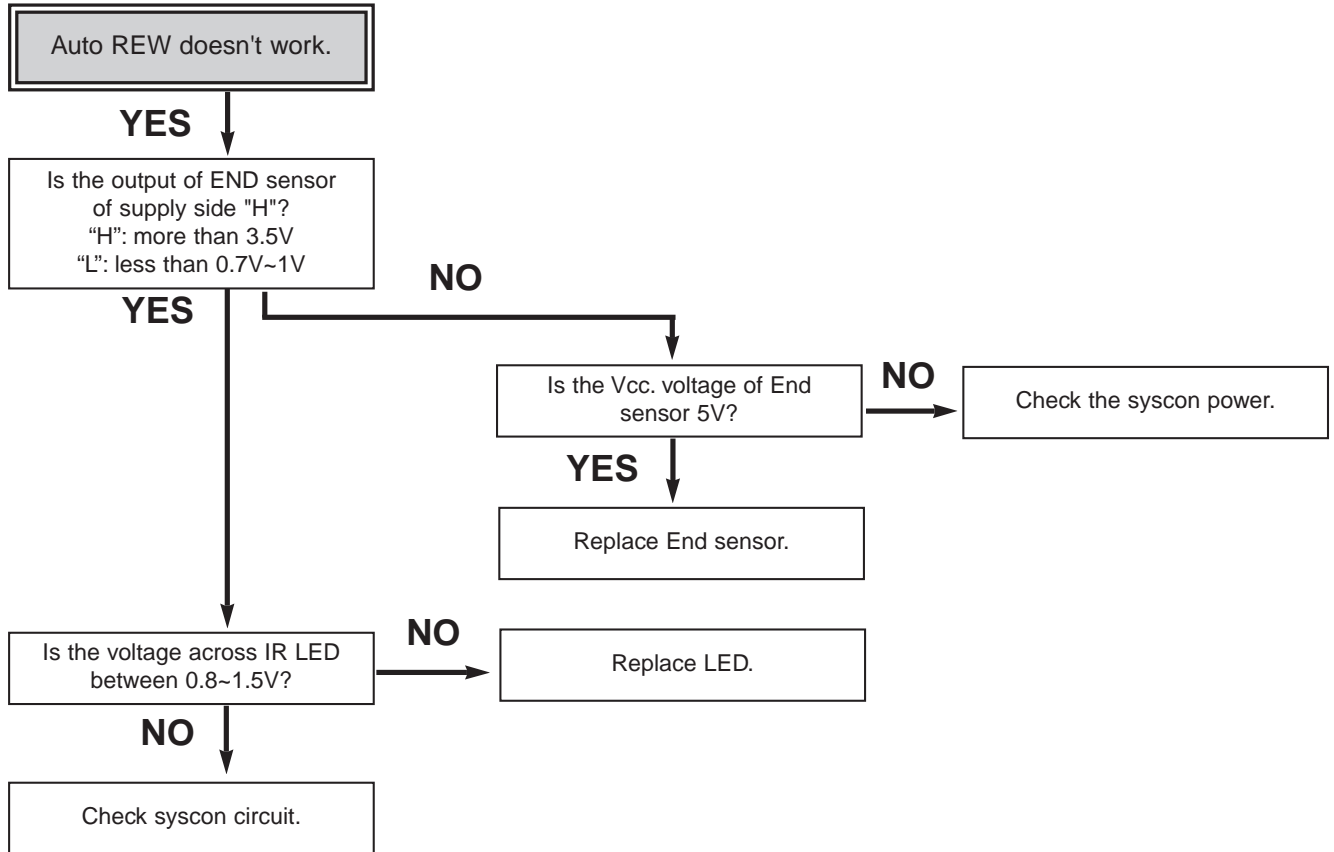


B.

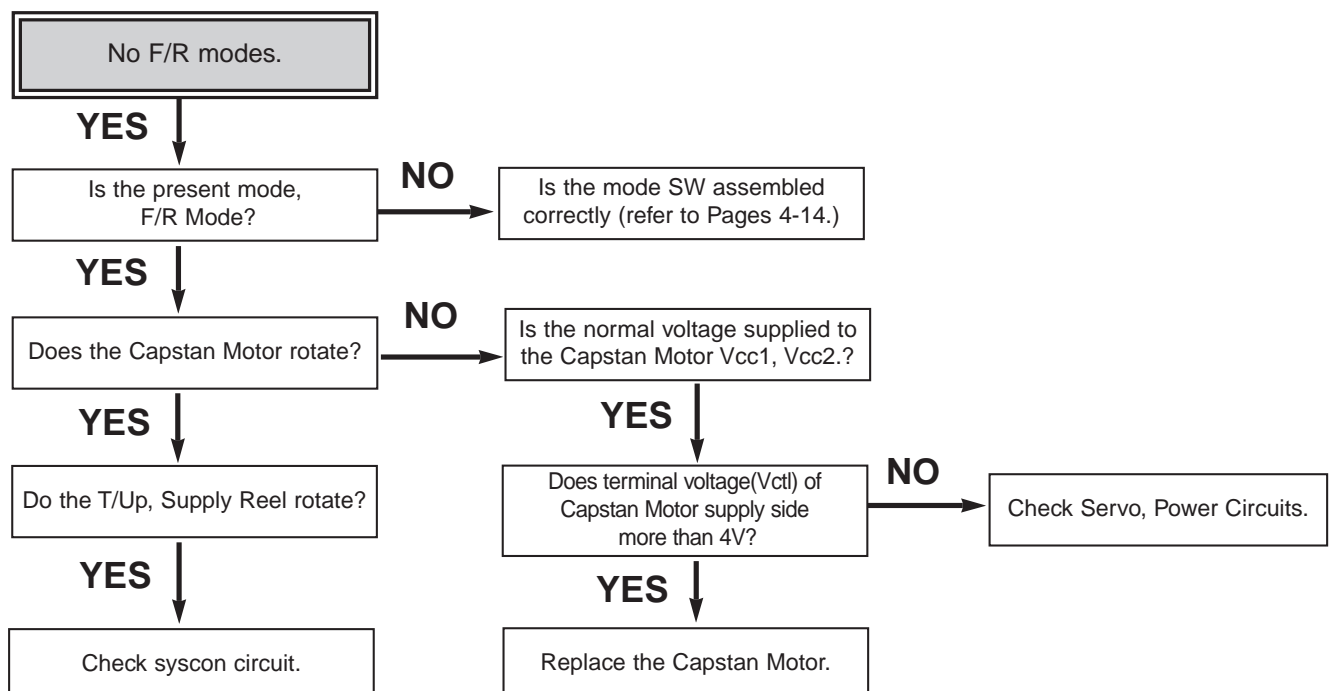


MECHANISM TROUBLESHOOTING GUIDE

C.

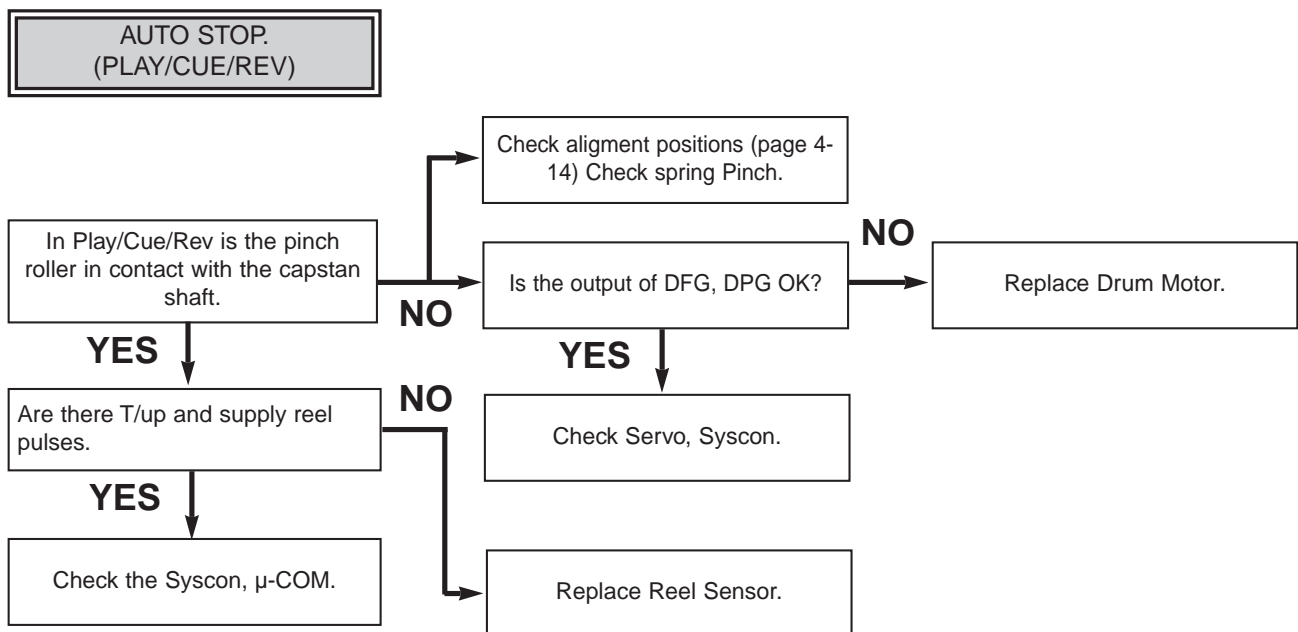


D.

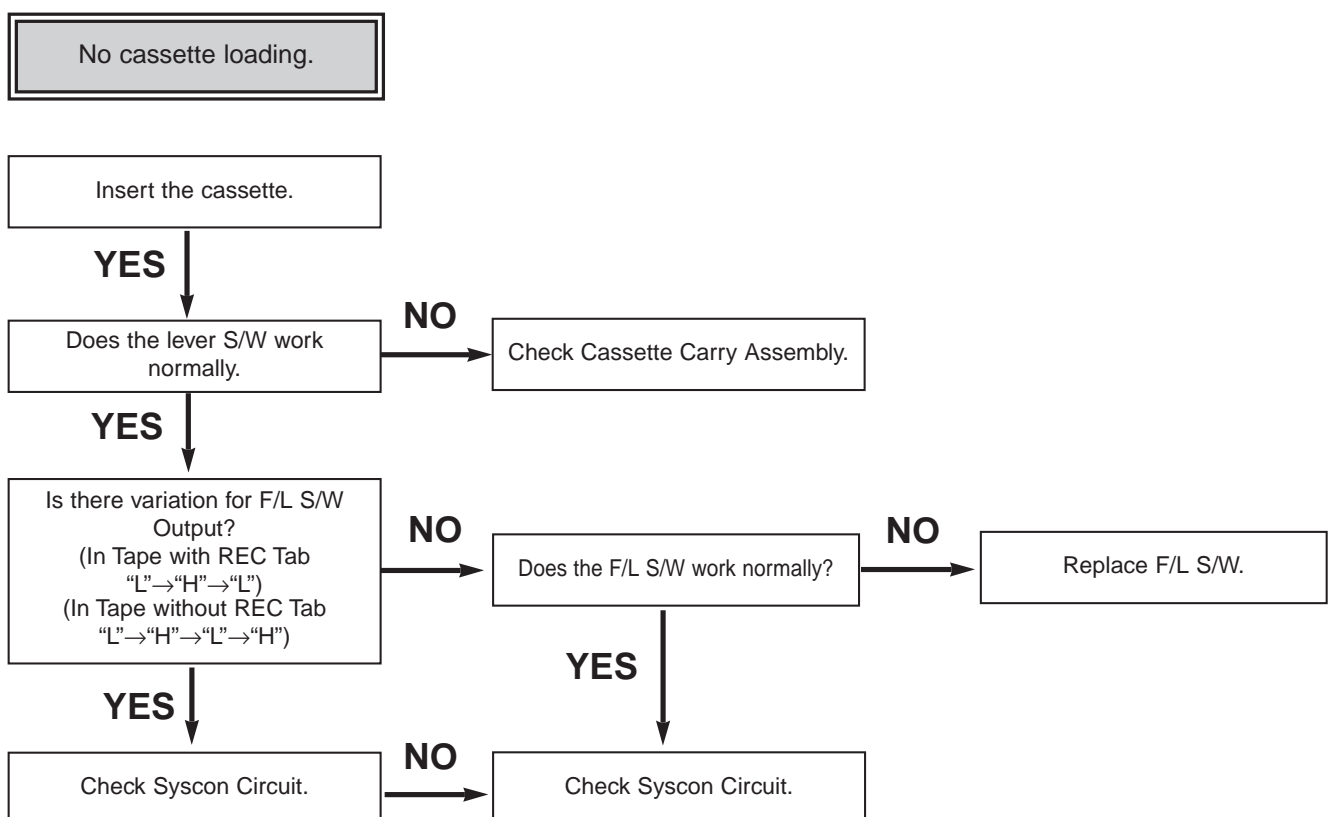

MECHANISM TROUBLESHOOTING GUIDE


E.

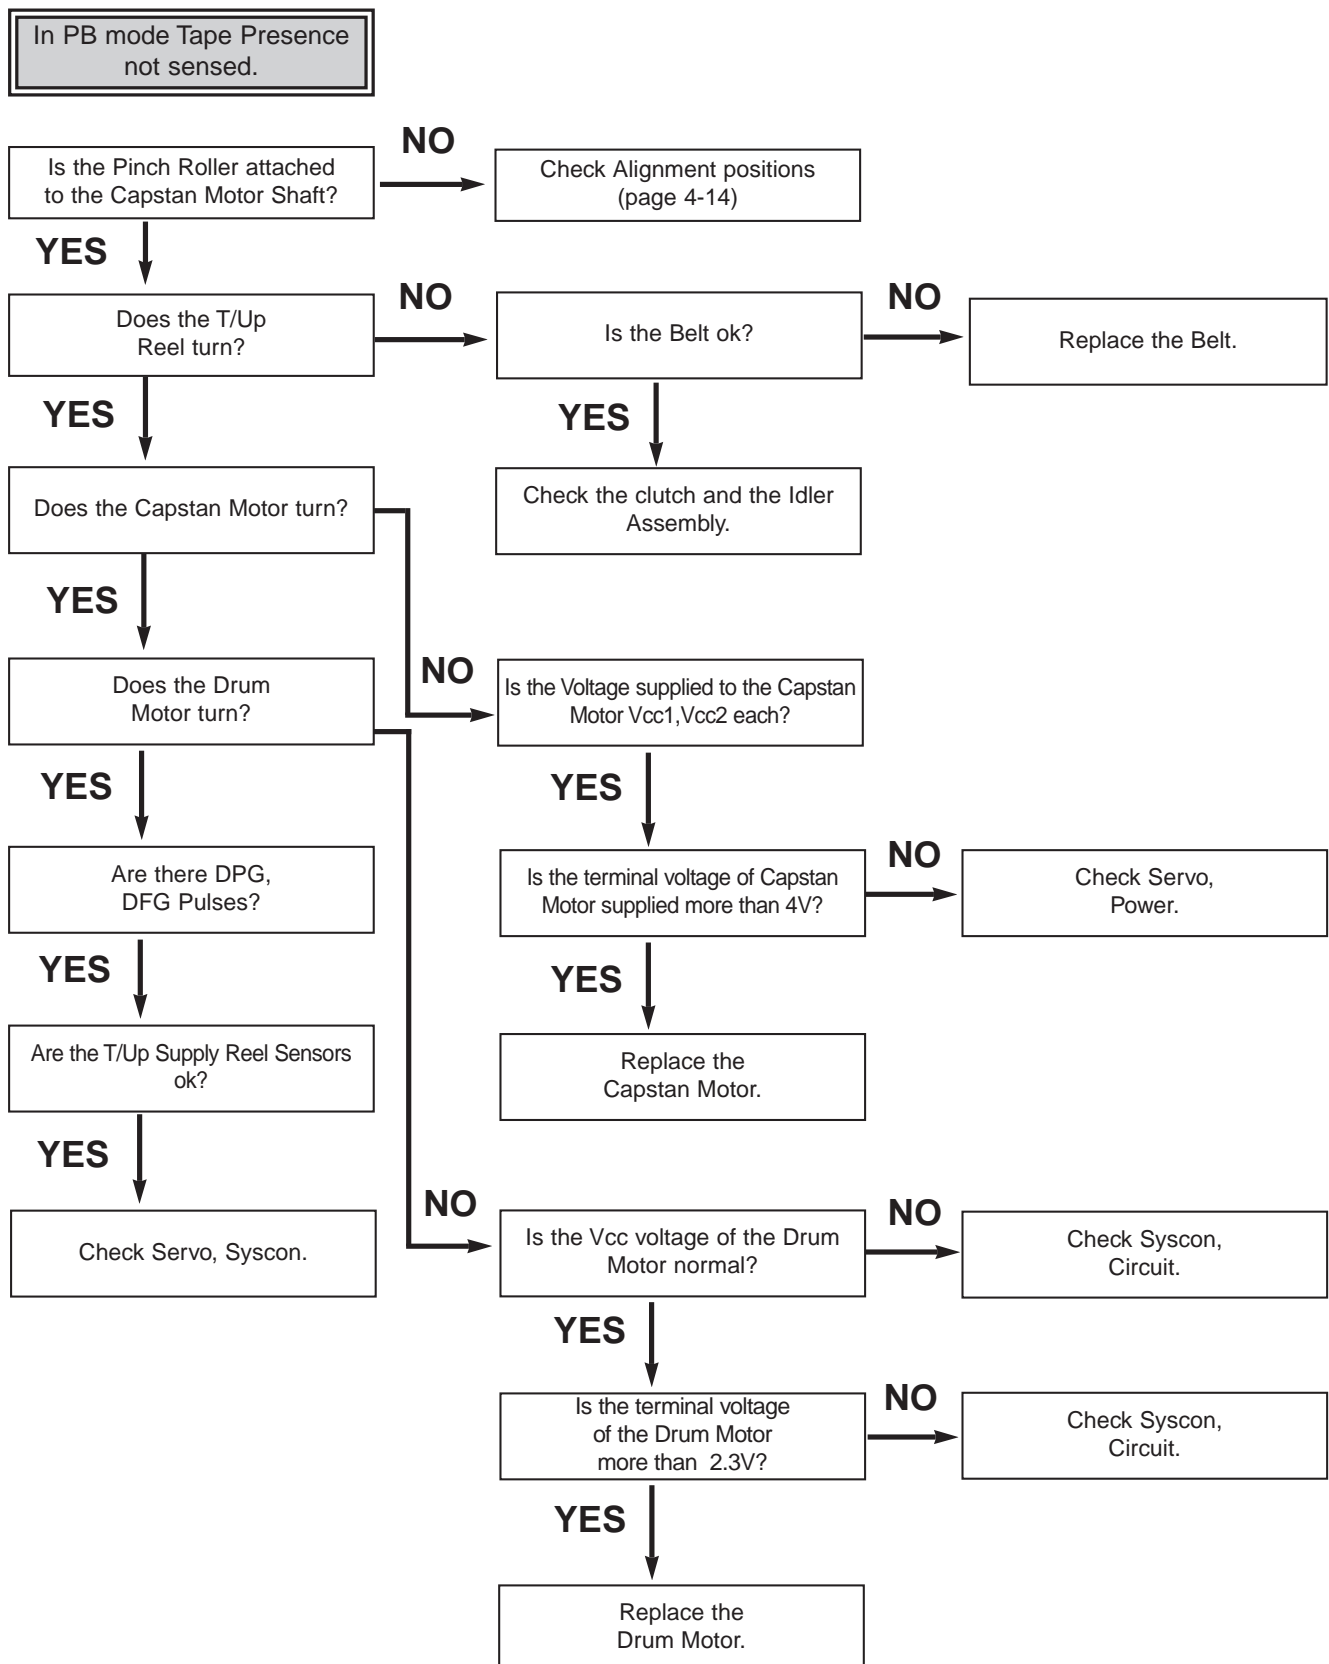


MECHANISM TROUBLESHOOTING GUIDE

2. Front Loading Mechanism

A.

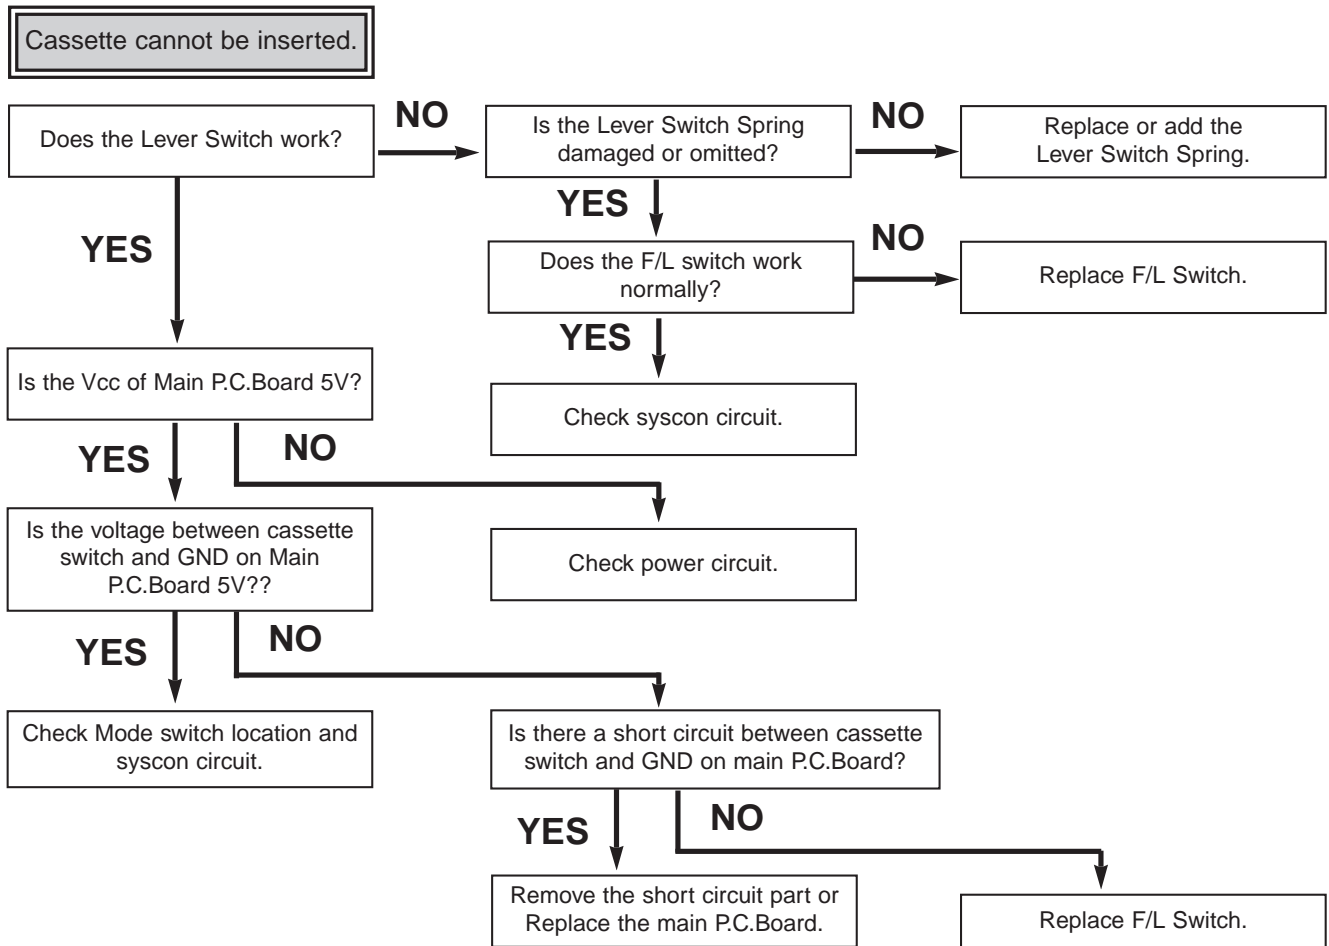


B.

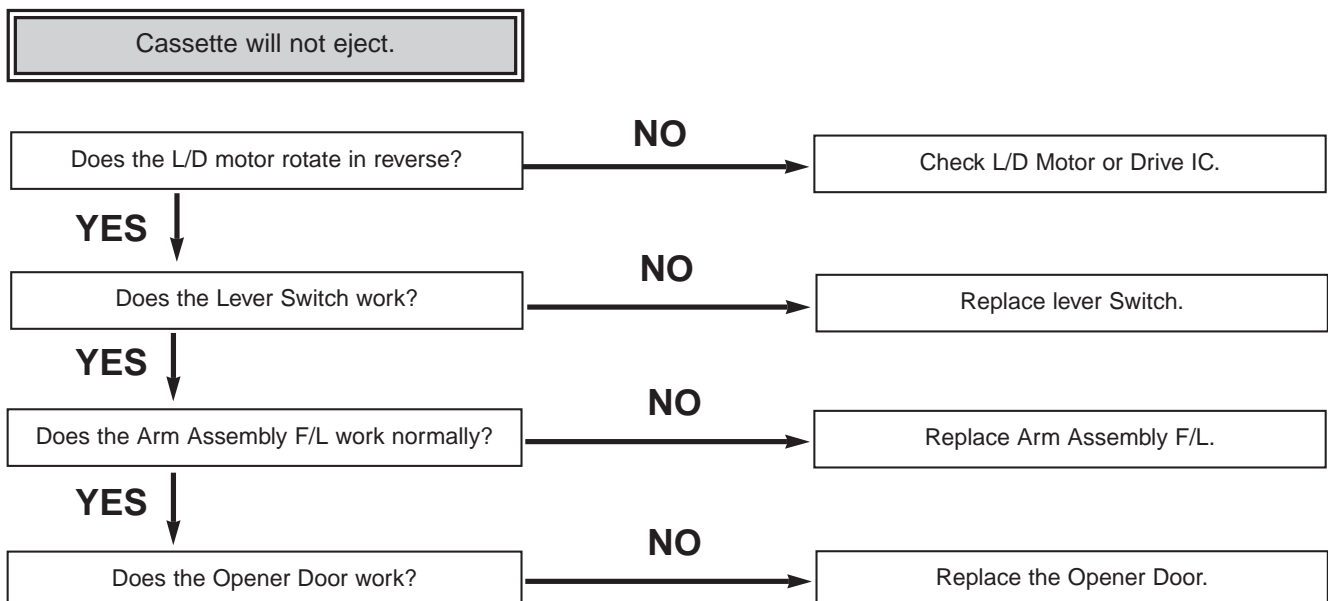


MECHANISM TROUBLESHOOTING GUIDE

C.

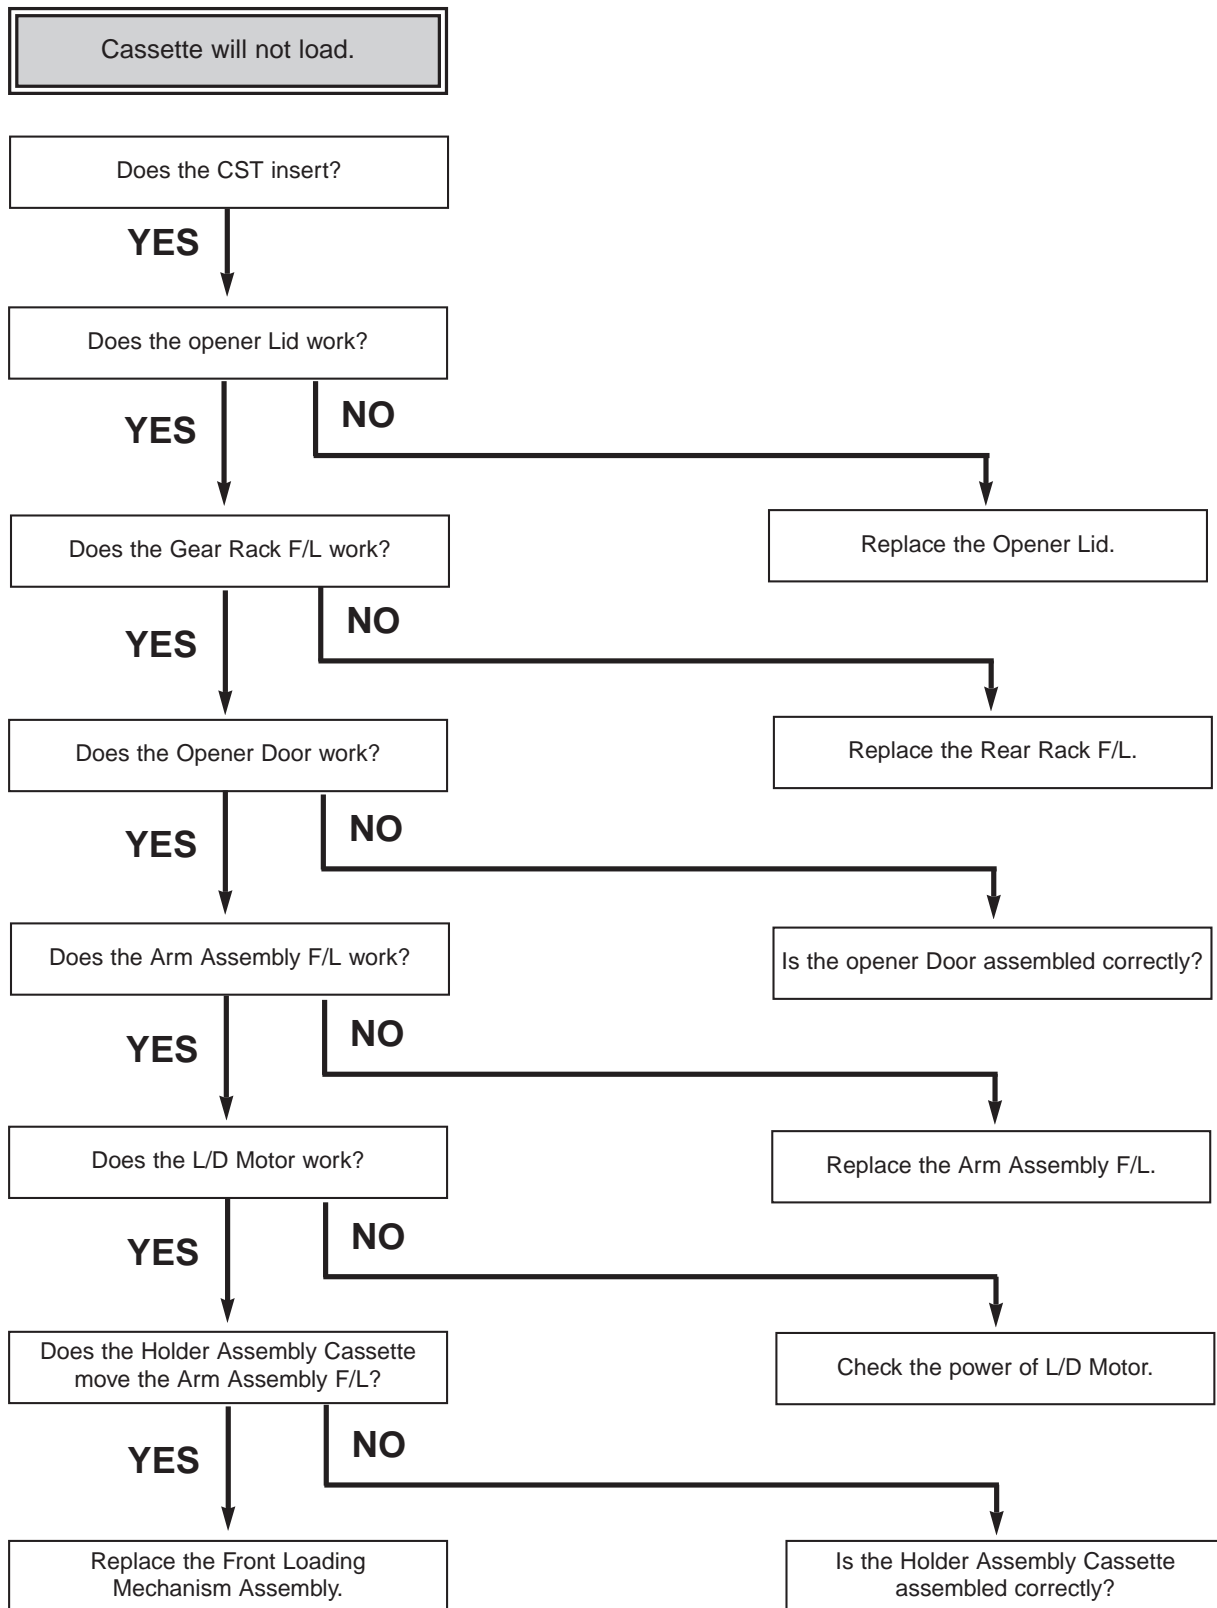


EXPLODED VIEWS

1. Front Loading Mechanism Section

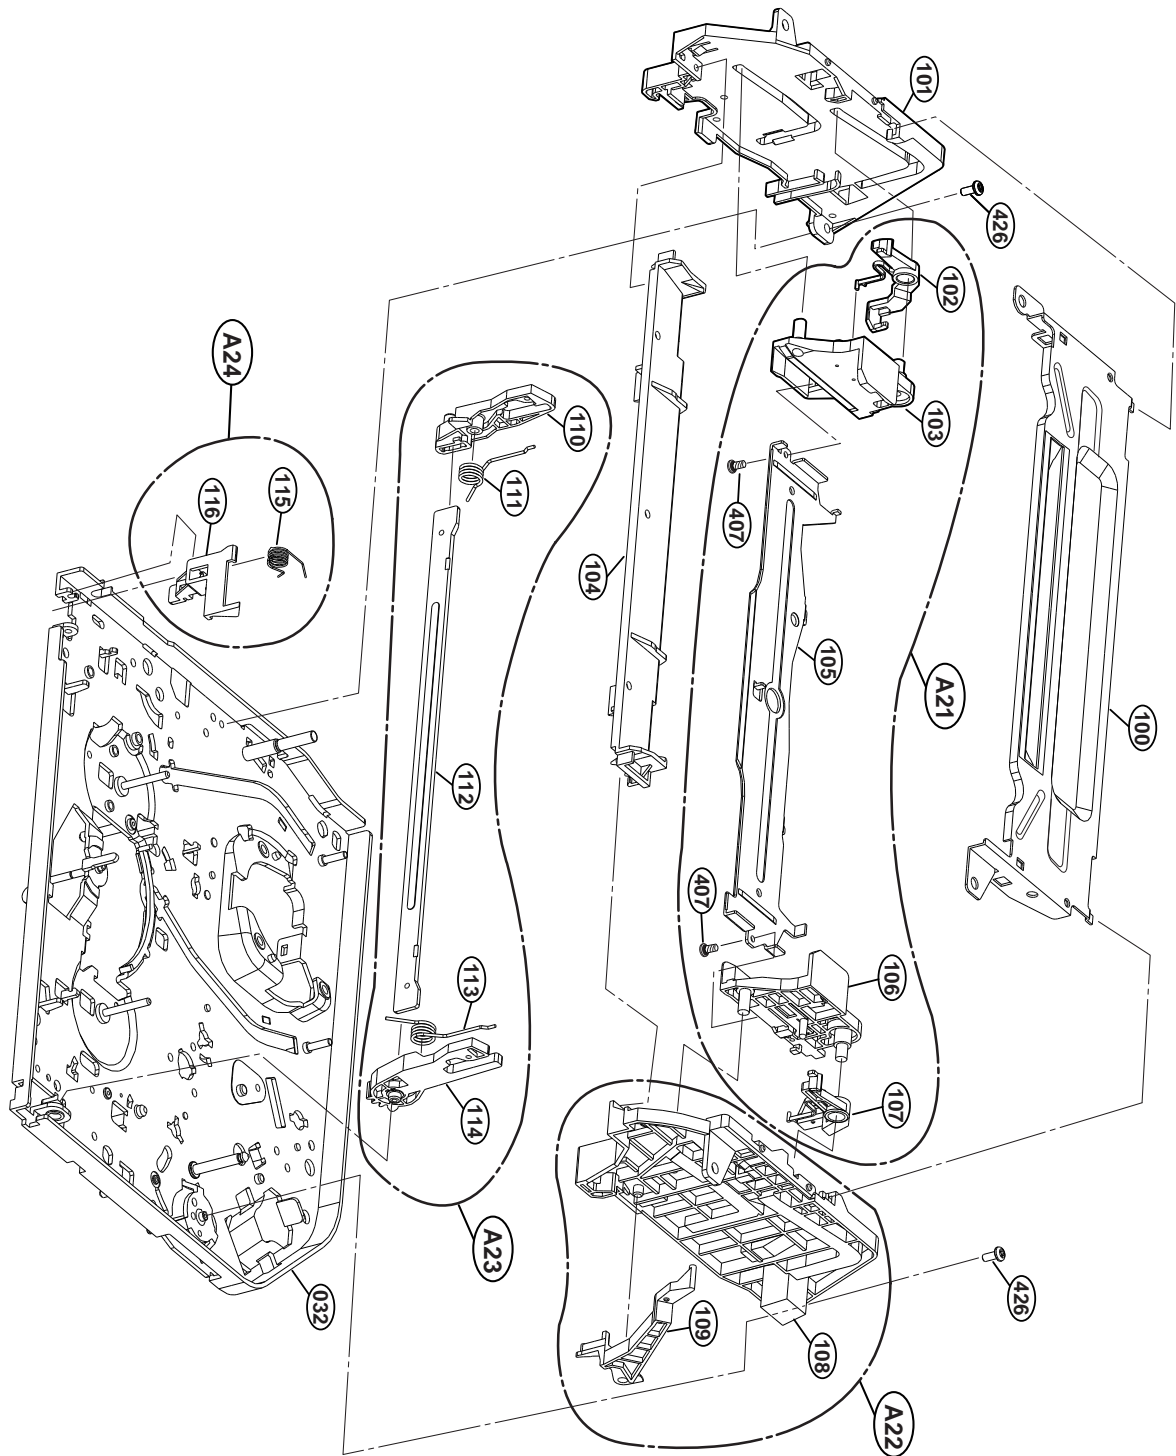

EXPLODED VIEWS

2. Moving Mechanism Section(1)

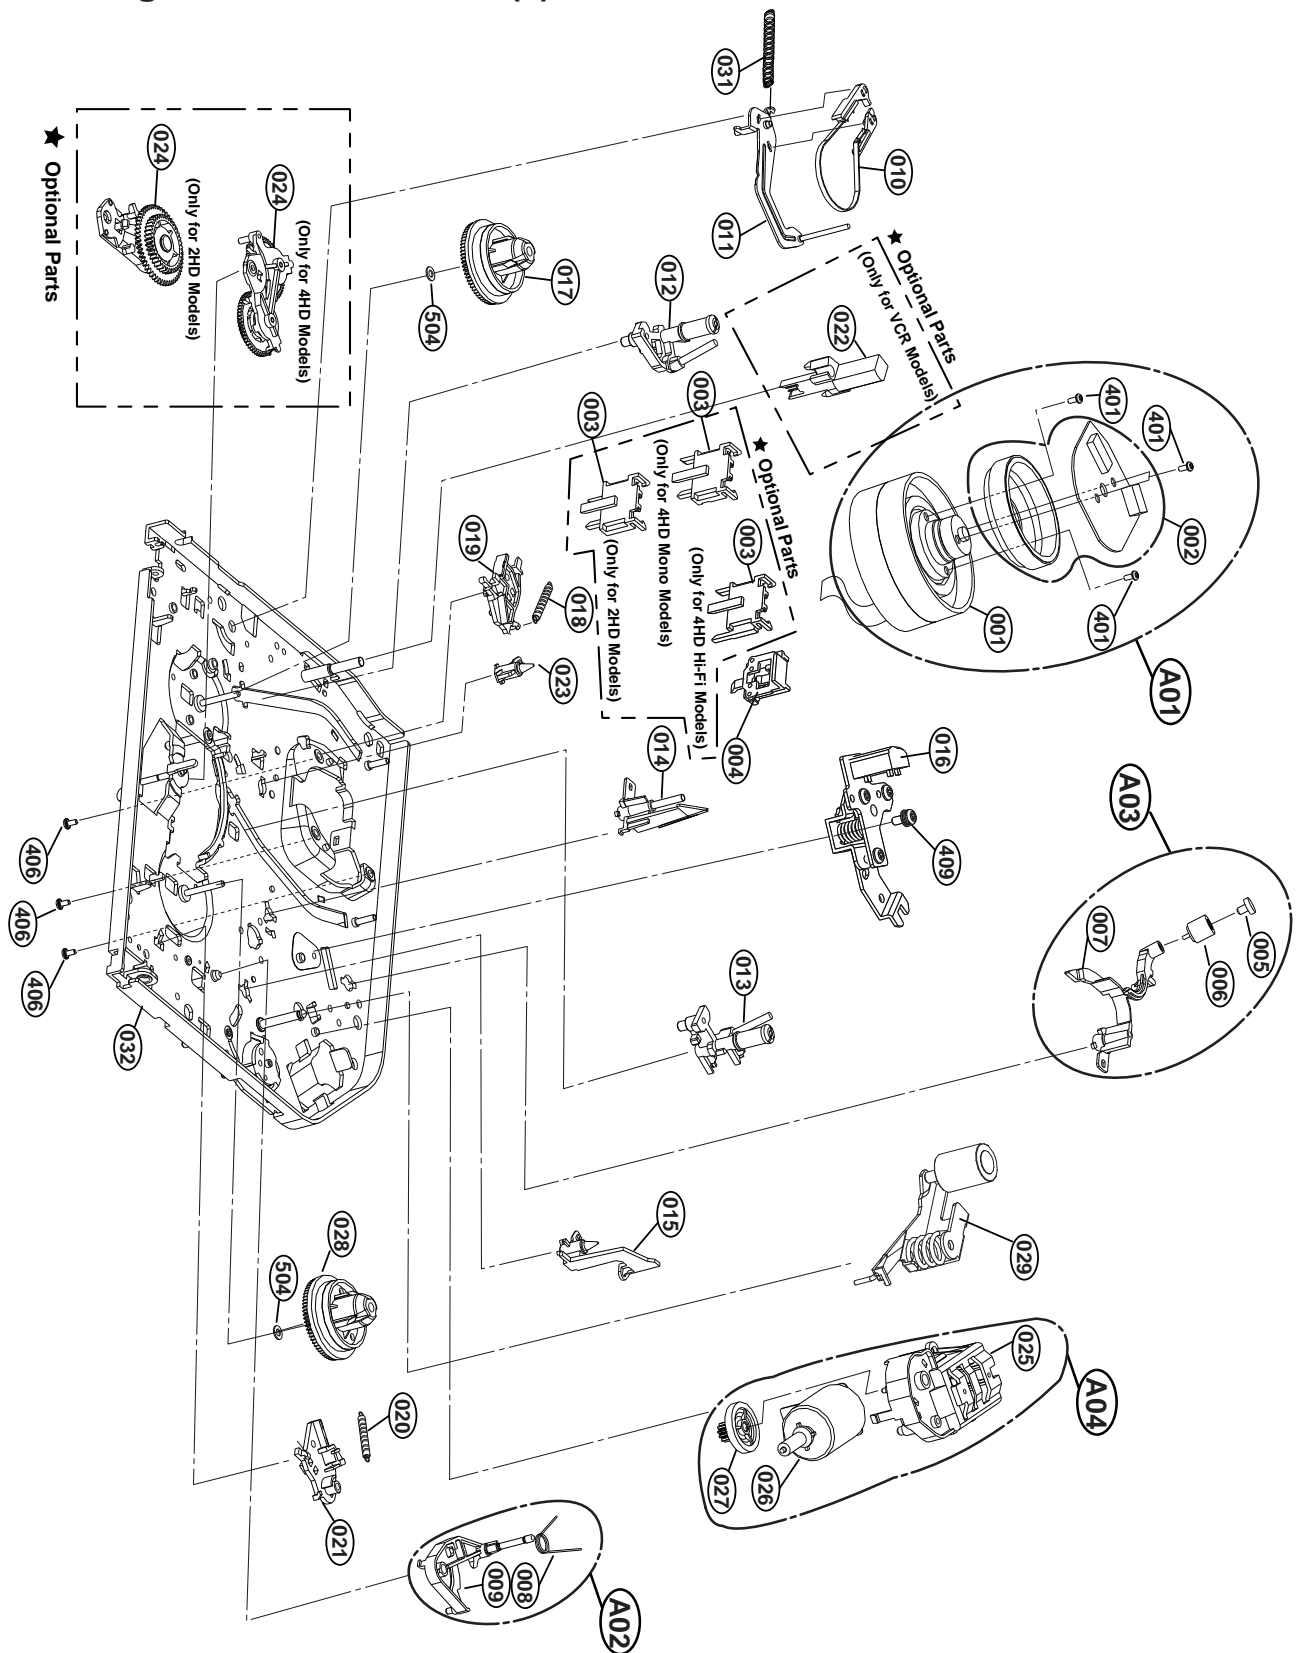

3. Moving Mechanism Section(2)

