




4-2. POWER SUPPLY SECTION IN MAIN SCHEMATIC DIAGRAM (NV-HD650A)

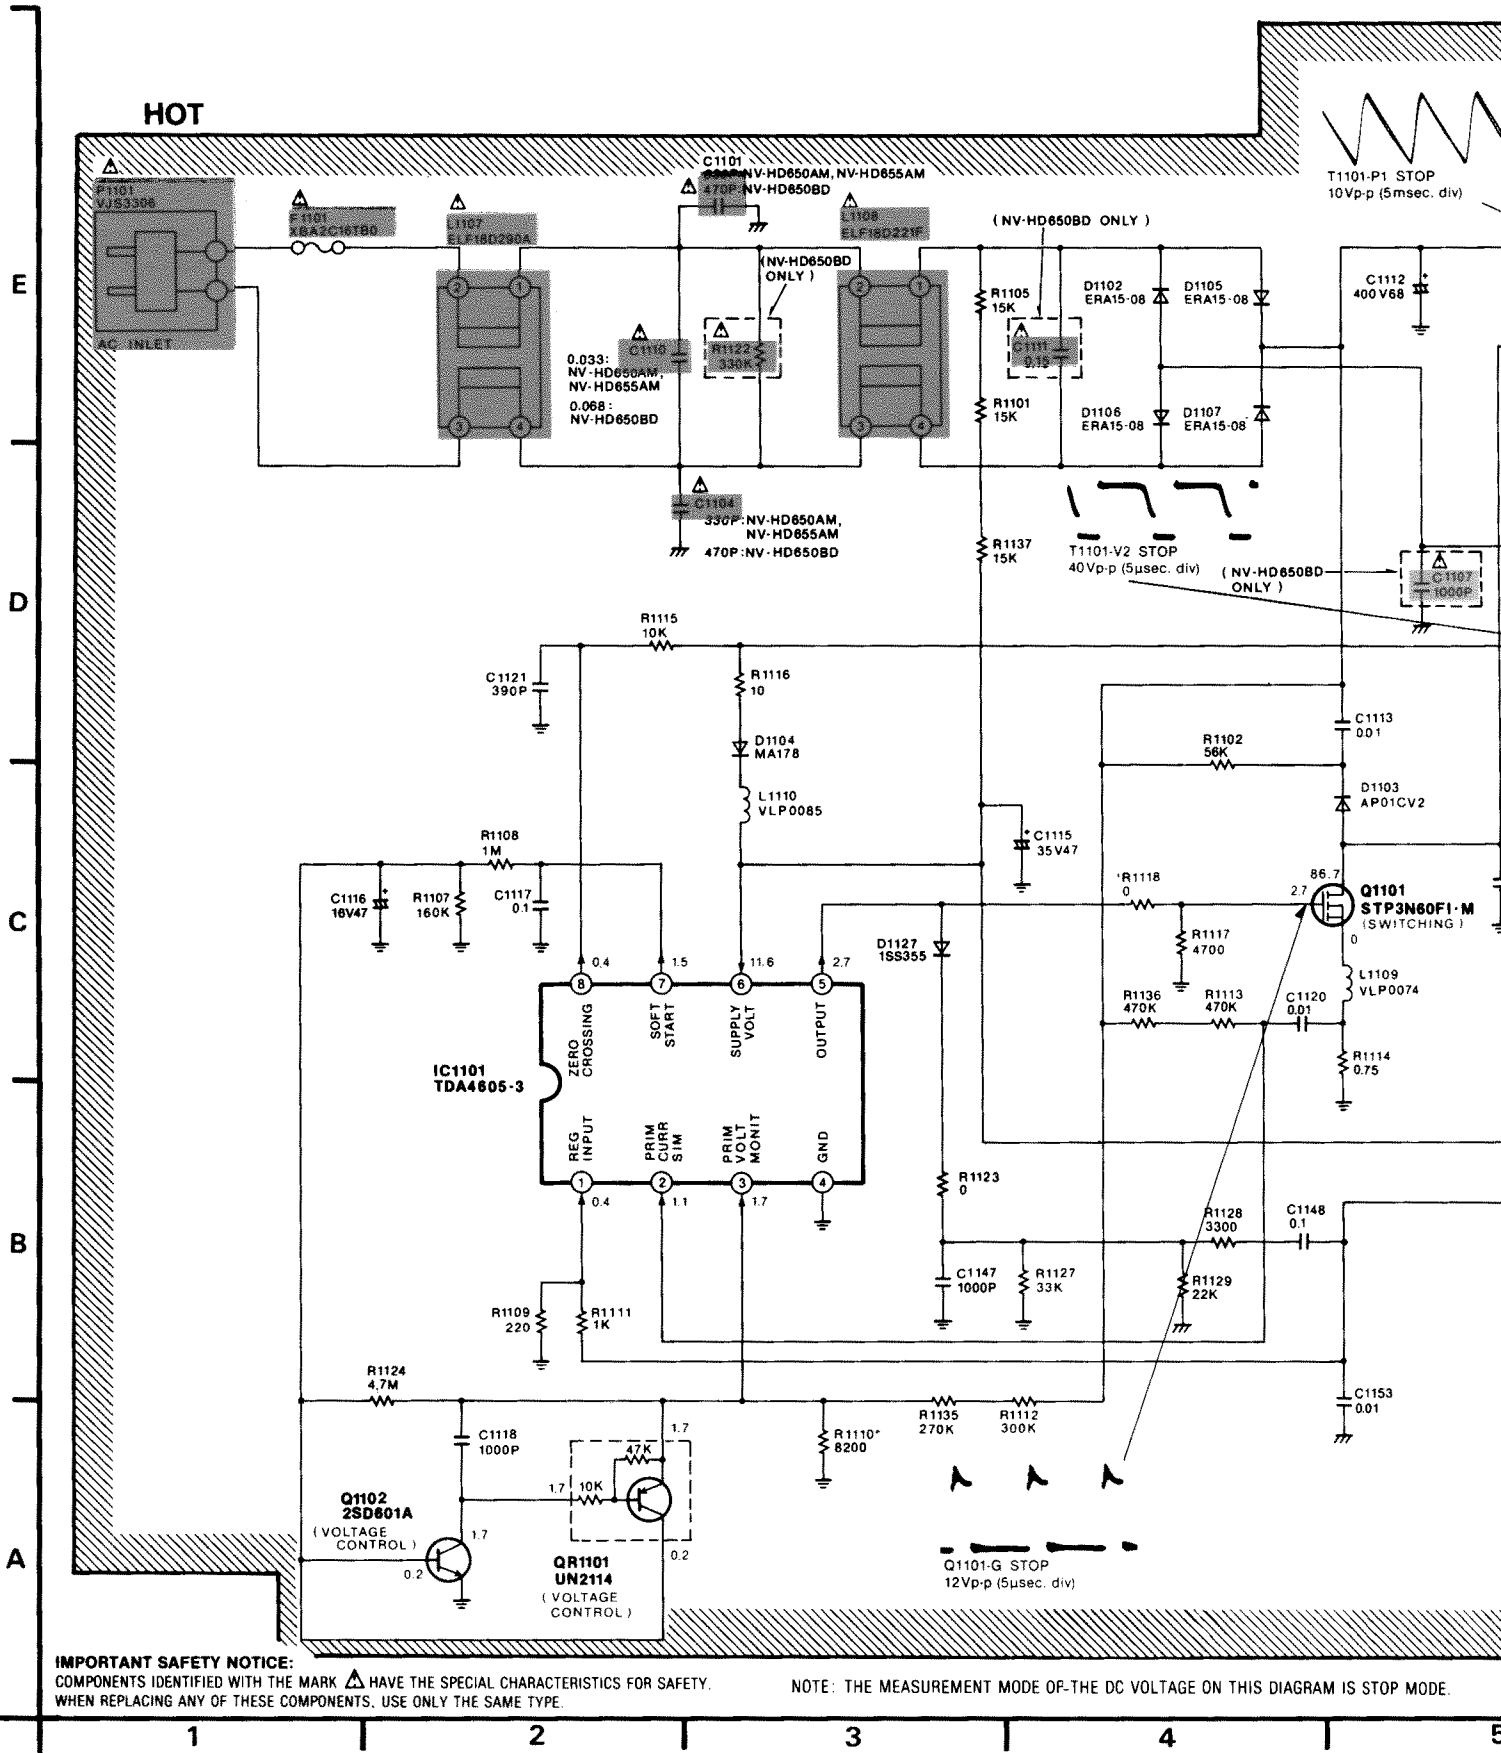

(NV-HD650AM/BD,NV-HD655AM)

CAUTION THE RED MARK INDICATES THE PRIMARY CIRCUIT TO DISTINGUISH THE SECONDARY CIRCUIT.
 PAY ATTENTION NOT TO RECEIVE AN ELECTRIC SHOCK DURING REPAIR OF THE PRODUCTS.

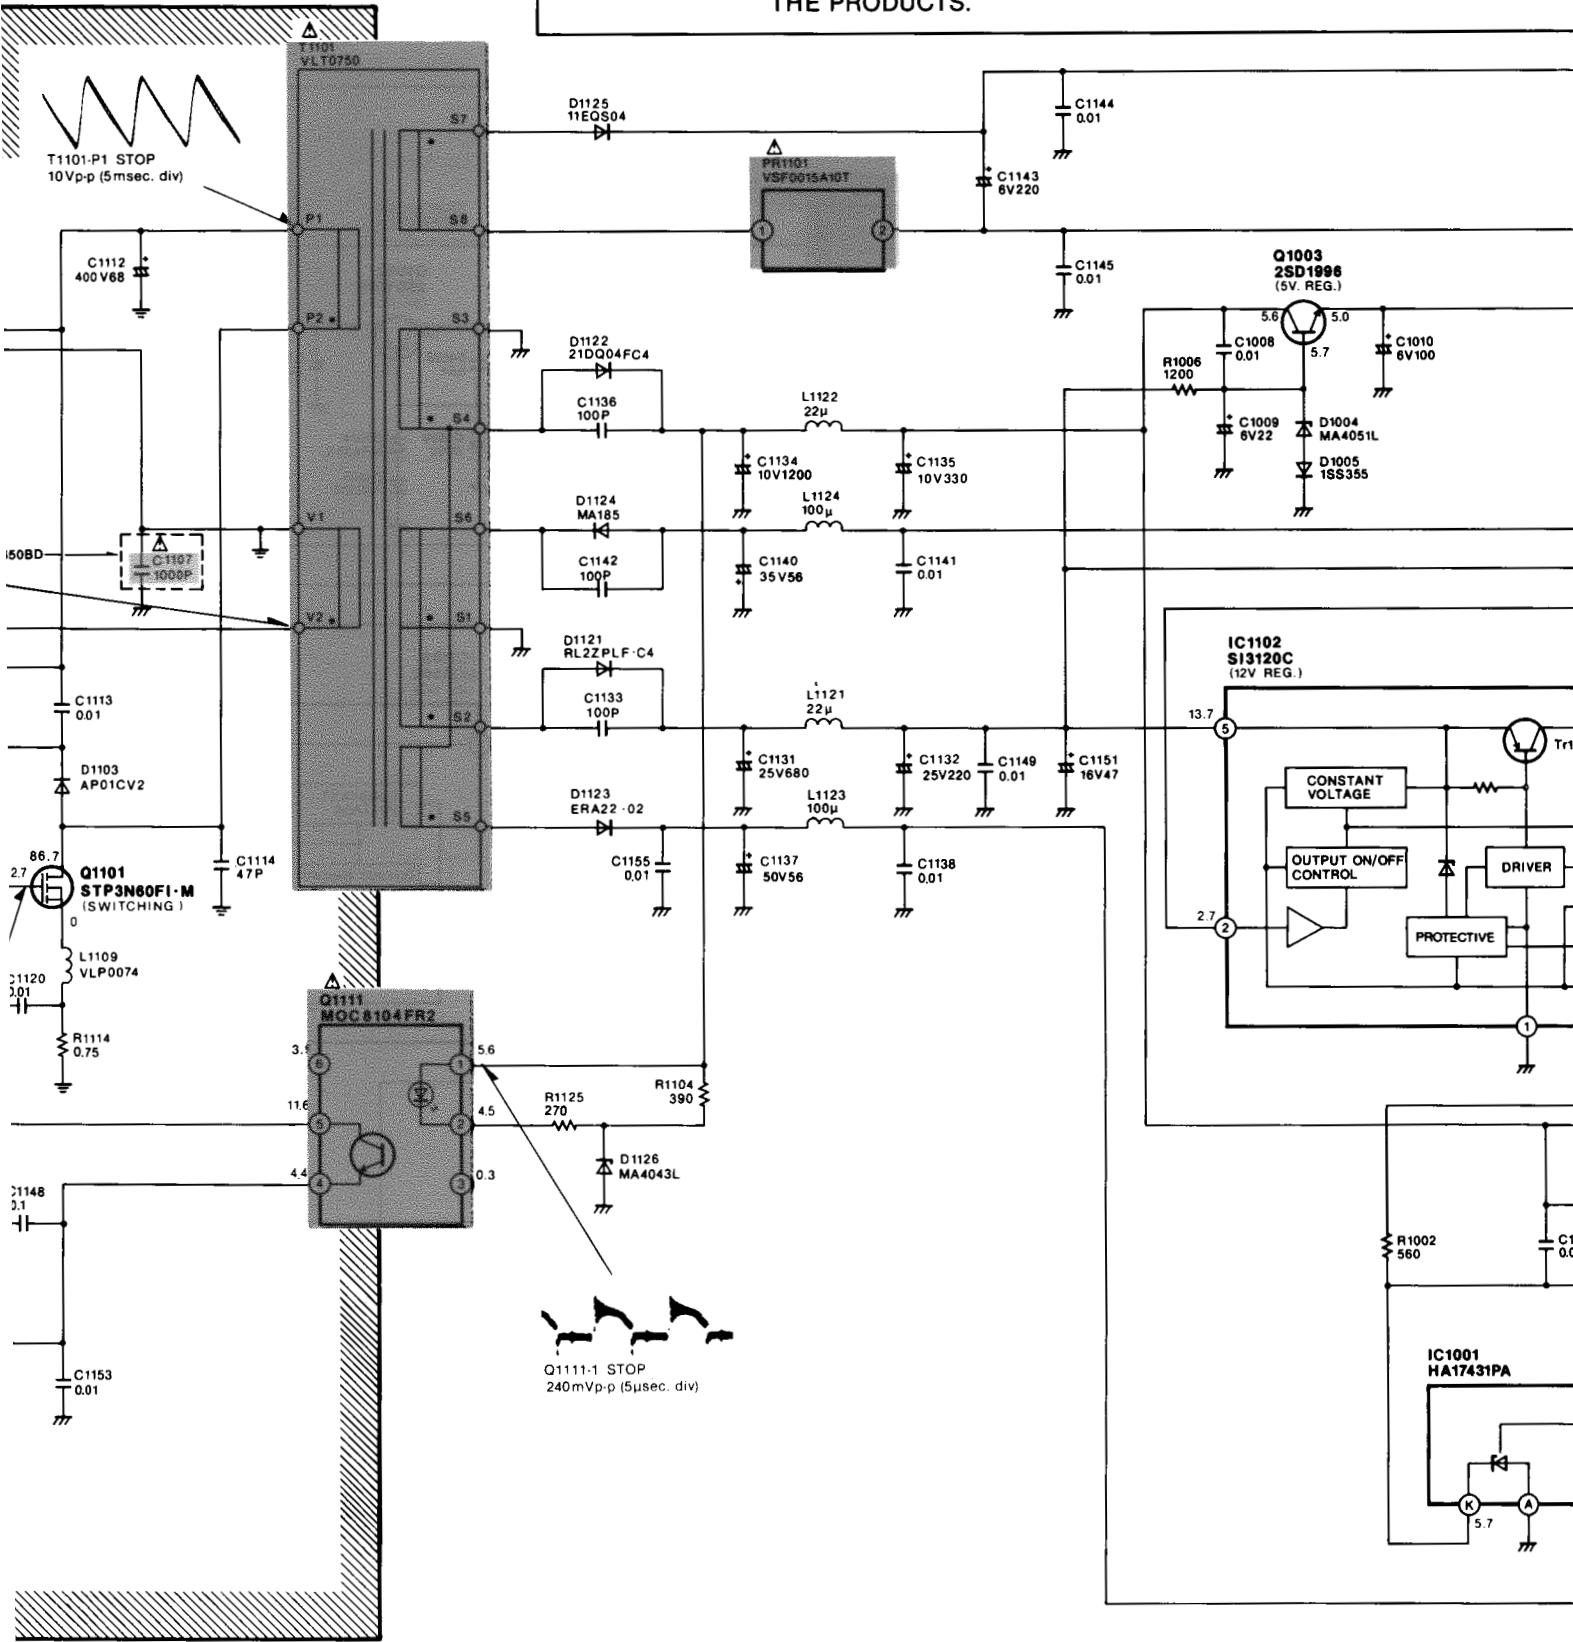


GRAM IS STOP MODE.

NOTE 1. WHEN MEASURE THE VOLTAGE OR WAVEFORM ON THE POWER TRANSFORMER CIRCUIT, SET THE GND TERMINAL OF MEASURING POINT AS FOLLOWS.


PRIMARY SIDE ≡
 SECONDARY SIDE ... ⏏

NOTE 2. THE DC VOLTAGE INPUT AC IS 240

5 | 6 | 7 | 8 | 9



DISTINGUISH THE PRIMARY FROM
 DURING REPAIR AND SERVICE OF

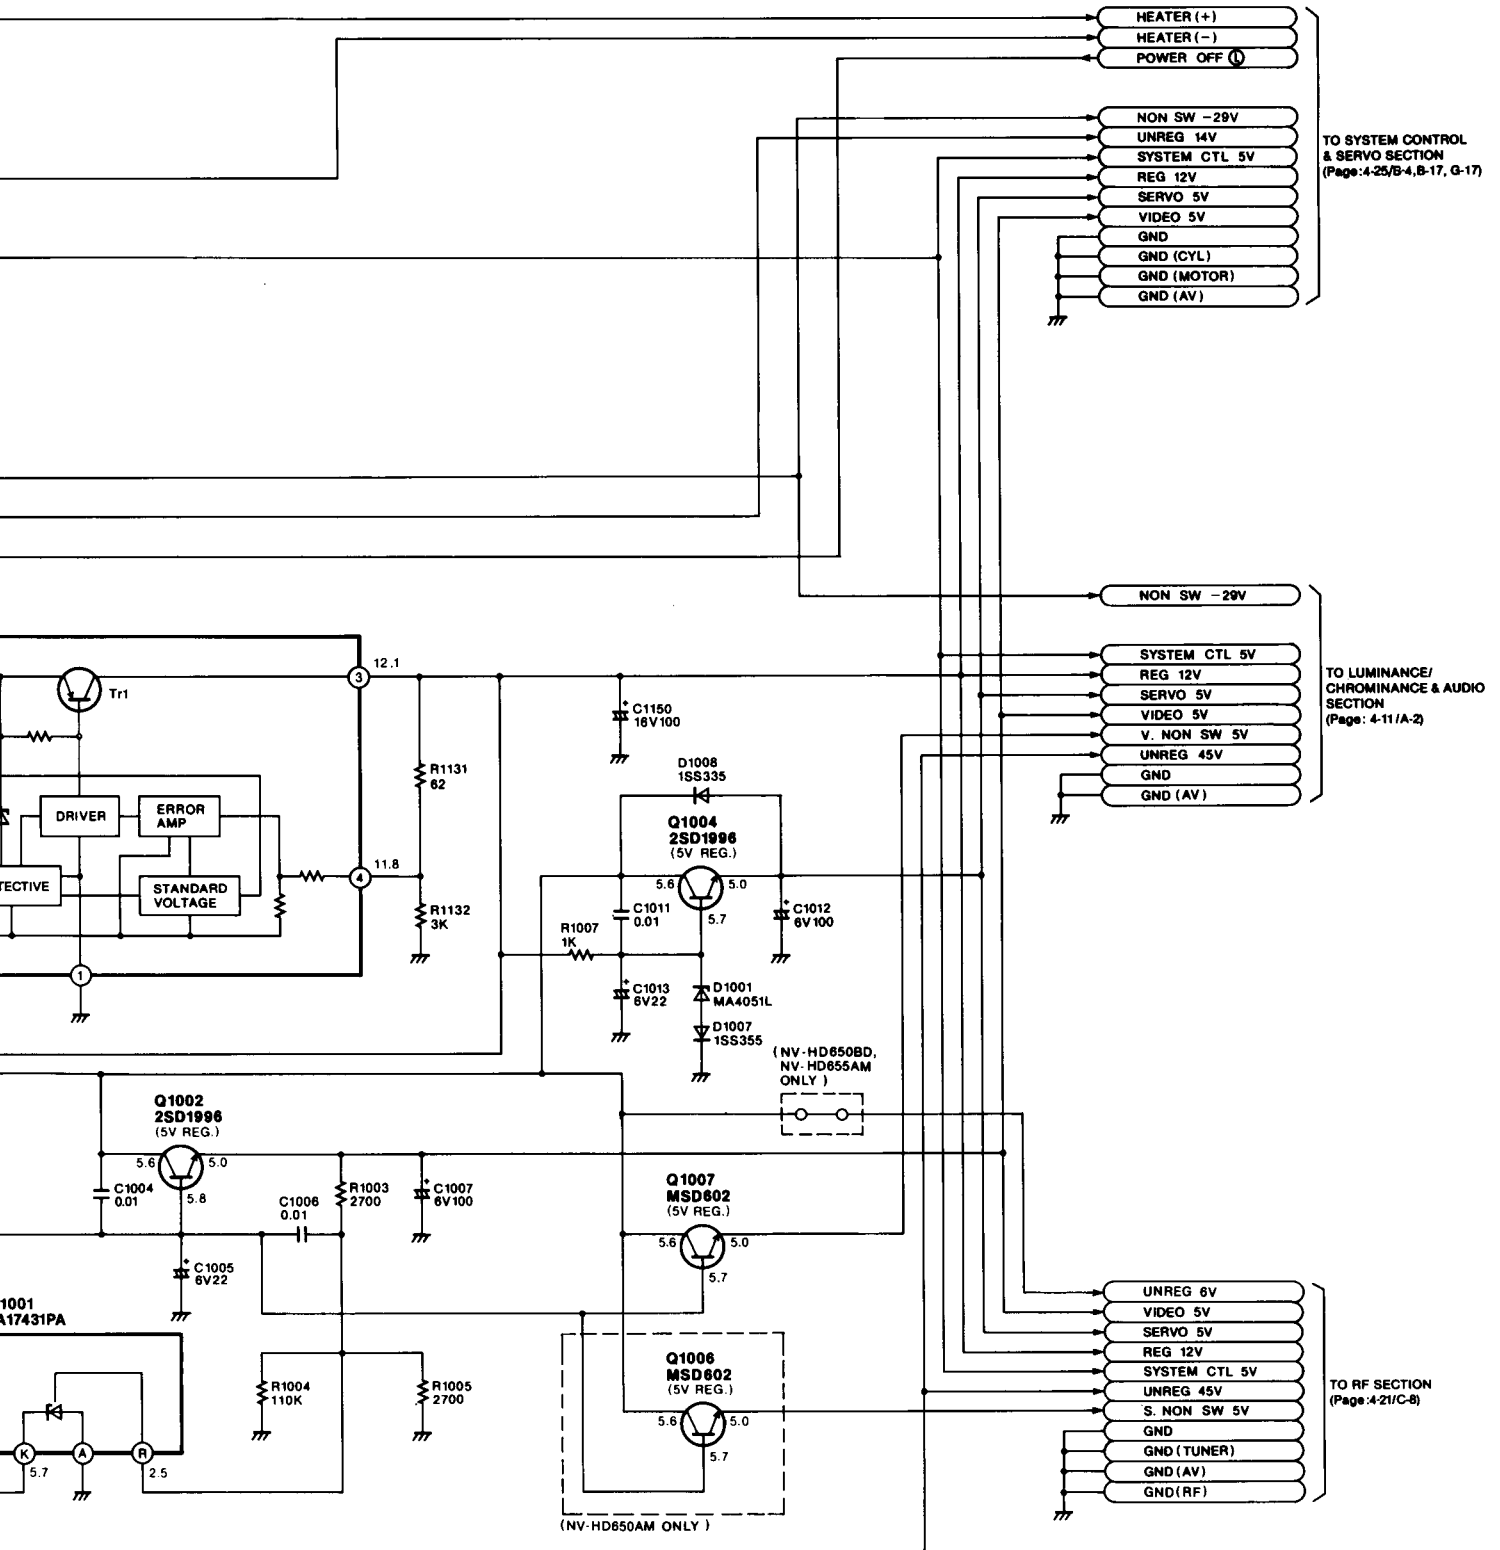

THE DC VOLTAGE INDICATED IN PRIMARY SIDE IS SHOWN THE VOLTAGE WHEN
 INPUT AC IS 240V.

NOTE: DO NOT USE ANY PART NUMBER SHOWN ON THIS
 SCHEMATIC DIAGRAM FOR ORDERING. WHEN YOU
 ORDER A PART, PLEASE REFER TO PARTS LIST.

9 | 10 | 11 | 12 | 13

