

KR-V888D (X09-455X-XX)


DESTINATION	COUNTRY	ABB	J1 No.	J7	F1,2	PS	WH7.8	WH11.82	WH13-18	F-1	F-2	F-3	F-4,5	F-5,7	CN1-1,2	T1
CHINA	C	3-01	E03-030	YES			NO	YES	NO		NC			250V T3.5A L	NO	LU-2922
U.K.	T	0-51	E03-0310				YES	NO			250V T2.5A L			250V T4A	NO	
GENERAL MARKET	M	0-21	E03-0119	NO	NO	NO	YES	YES		250V 1A L	250V T2.5A L	250V T800mA L	250V T1A L	250V T3.5A L	YES	LU-2301
AUSTRALIA	X	0-71	E03-0235								NO			250V T3.5A L	NO	
EUROPE	E	2-71	E03-0149												YES	LU-2922
RUSSIA	G	3-81	E03-0146	YES			YES	NO	NO					250V T2.5A L	NO	

KR-V888D (X09-455X-XX)

DESTINATION	COUNTRY	ABB	UNIT No.	D30	D44	D45	R125,126,185, 227,228	R129-132,185,186, 267,268,330	R231-234	R331	C9,10,21,22,25,26, 29-34,37,38	C129,130, 193,194
CHINA	C	3-01		HU11ES(B2) or HZ516N(B2)	HU24ES(B2) or HZ520S(B2)	HU10ES(B2) or HZ510N(B2)	220	16K	8.2K		NO	NO
GENERAL MARKET	M	0-21		HU11ES(B2) or HZ516N(B2)	HU24ES(B2) or HZ520S(B2)	HU10ES(B2) or HZ510N(B2)	220	16K	8.2K		NO	NO
AUSTRALIA	X	0-71		HU11ES(B2) or HZ516N(B2)	HU24ES(B2) or HZ520S(B2)	HU10ES(B2) or HZ510N(B2)	220	16K	8.2K		NO	NO
J.K.		0-51		HU11ES(B2) or HZ516N(B2)	HU24ES(B2) or HZ520S(B2)	HU10ES(B2) or HZ510N(B2)	220	16K	8.2K		NO	NO
EUROPE	E	2-71		HU11ES(B2) or HZ516N(B2)	HU24ES(B2) or HZ520S(B2)	HU10ES(B2) or HZ510N(B2)	220	16K	8.2K		NO	NO
RUSSIA	G	3-81		HU11ES(B2) or HZ516N(B2)	HU24ES(B2) or HZ520S(B2)	HU10ES(B2) or HZ510N(B2)	220	16K	8.2K		NO	NO

KR-V888D (X09-455X-XX)

DESTINATION	COUNTRY	ABB	UNIT No.	C'46,150, 167,170	C'65	W208,236	W229	W230	W235	W237	W238	W241	S1
CHINA	C	3-01					NO	YES	YES	NO	NO	NO	NO
GENERAL MARKET	M	0-21		YES	U,22	NO	NO	YES	YES	NO	YES	YES	YES
AUSTRALIA	X	0-71					YES	NO	YES	NO	NO	NO	NO
U.K.	T	0-51					YES	NO	YES	NO	NO	NO	NO
EUROPE	E	2-71					YES	NO	YES	NO	NO	NO	NO
RUSSIA	G	3-81					NO	YES	YES	NO	NO	NO	NO

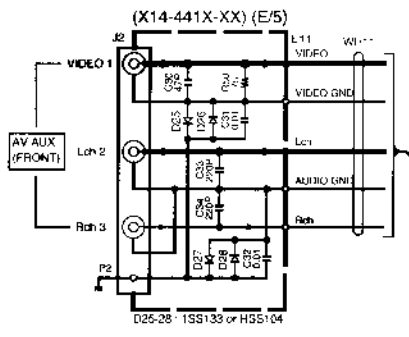

— SIGNAL LINE
 — GND LINE
 — +B LINE
 - - - - - B LINE

KR-V888D/1080VR(K) (5/6)

KR-V888D/1080VR

Y05-3310-10

KENWOOD

SIGNAL LINE
 GND LINE
 +B LINE
 -B LINE

IC641, 642, 681	IC681	Q692, 694, 695, 696	C641-680, 682, 683, 684, 685	R641-645, 647-657, 652, 654, 655, 673-677, 681-690	R692, 632	L641	X641, 642	J2
YES	YES	YES	YES	YES	NO	YES	YES	YES
	NO							NO
								YES


IC641, 642, 681	Q692, 694, 695, 696	C641-680, 682, 683, 684, 685	R641-645, 647-657, 652, 654, 655, 673-677, 681-690	R692, 632	L641	X641, 642	J2
NO	NO	NO	NO	YES	NO	NO	NO
YES	YES	YES	YES	NO	YES	YES	NO

CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). Δ indicates safety critical components. For continued protection against risk of fire, replace only with same type and rating fuse(s). To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

The DC voltage is an actual reading measured with a high impedance type voltmeter with no signal input. The measurement value may vary depending on the measuring instruments used or on the product.

- (X08-1) (B3WC3)
- IC181, 201, 232, 252, 452, 551
- NJM4565M
 - IC181 NJU7311AM
 - IC232 TC9184AP
 - IC251 TC9412AP
 - IC351, 451 TC9413P
 - IC801 SN761200M
 - IC811 TA7805S
 - IC812 TA79005S
 - IC821, 841 MB90009PF-108
 - IC822, 842 MM1067KF
 - IC831 LA7808
 - IC831 TA7805B or MPC7805AHF
- Q61, 1, 108, 109 2SC4081(R,S) or 2SC4116(Y,GR)
- Q612 2SA1576A(R,S) or 2SA1586(Y,GR)
- Q691, 692 2SC4213(B)
- Q693, 694 UM5112 or DT4124EUA
- Q695-697 UN5212 or DTC124EUA
- Q671, 672 2SC3115(D27,28)
- D195, 201, 232, 251, 351, 451 DA204U or 1SS302 or MA143A
- D191-195, 197, 198, 652, 751, 752 MA111
- O231, 232 UDZ8, 28
- O661 DAN202U or 1SS301 or MA142WK
- O691 DAP202U or 1SS300 or MA142WA


2SA1110 DTC124ESA 2SA1586 2SC4081 2SB1370
 2SA1048 2SC2714 2SC4116
 2SC2458 2SC3115




TRAITR3N
 TRAITR3P
 TRAITR4N
 TRAITR4P




NJM4565D-D




TC9184AP




TC9413P



SN761200N



UN4212
 UN4219
 2SA1309A
 2SC3311A




NJM4565M
 TC7W04FU




UPD16311



DAN202U



UPC7805AHF
 UPC7808AHF




DAP202U
 DA204U



MA142WA
 MA142WK
 UN5212




1SS301




MC13028AM




TC74HCU04AF




2SD1757K




TC9412AP



LC72131




NJU7311AM
 NJU7312AM



TA7805S




TA79005S



LA1832




2SA1123
 2SA1534A
 2SA992
 2SC1845
 2SC2003




2SC2631
 2SC2878


TC7S04F




NJU7312AL
 NJU7313AL




TA7808S



NJM4580L-D



DSPF56009FJ81




KR-V888D/1080VF

KENWOOD

Y05-3310-10

KR-V888D/1080VR

BLOCK DIAGRAM

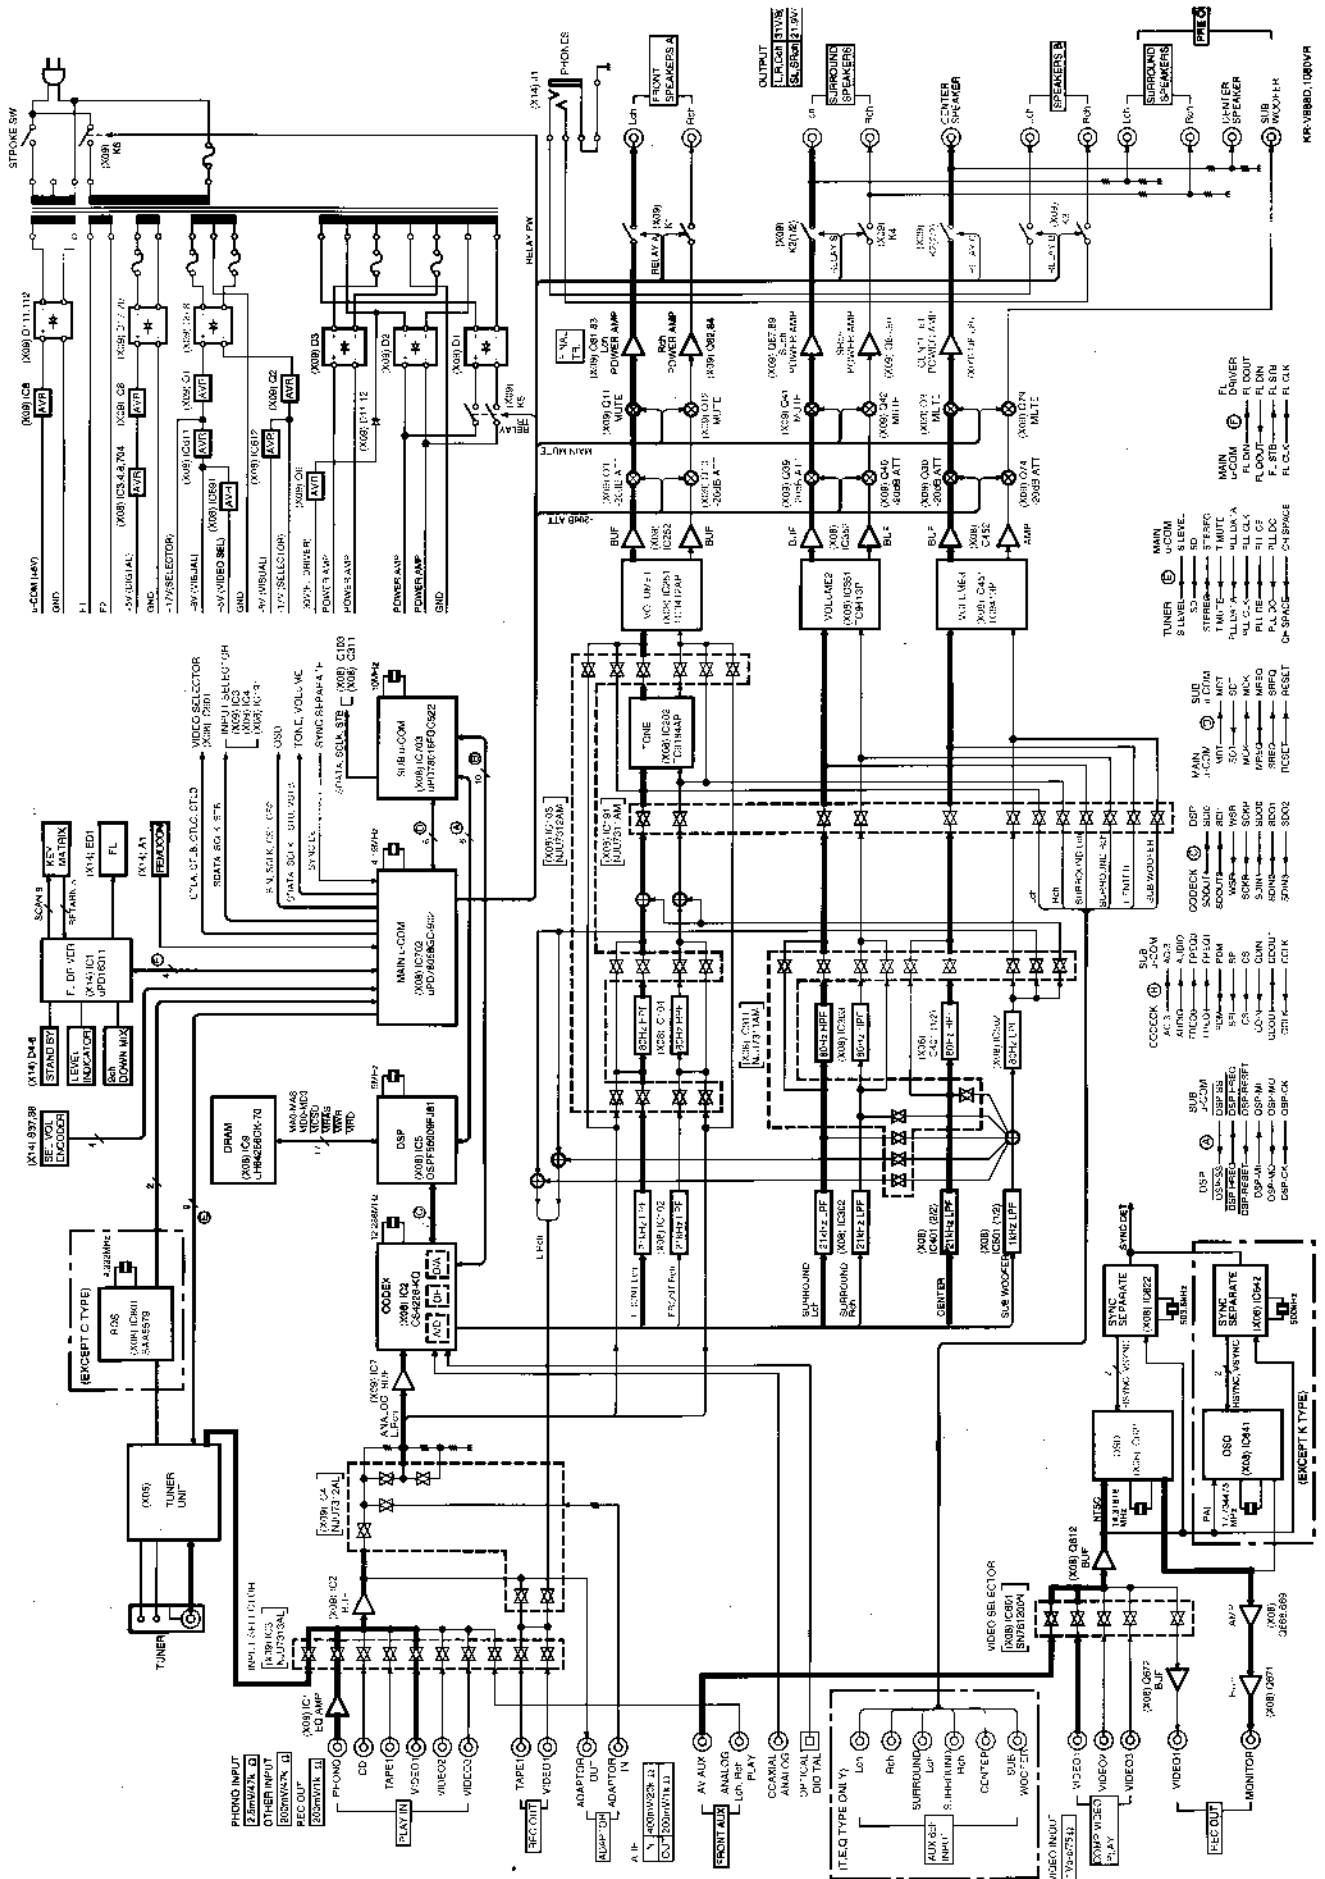

KR-V888D/1080VR


CC

CD

CE



CF

CG

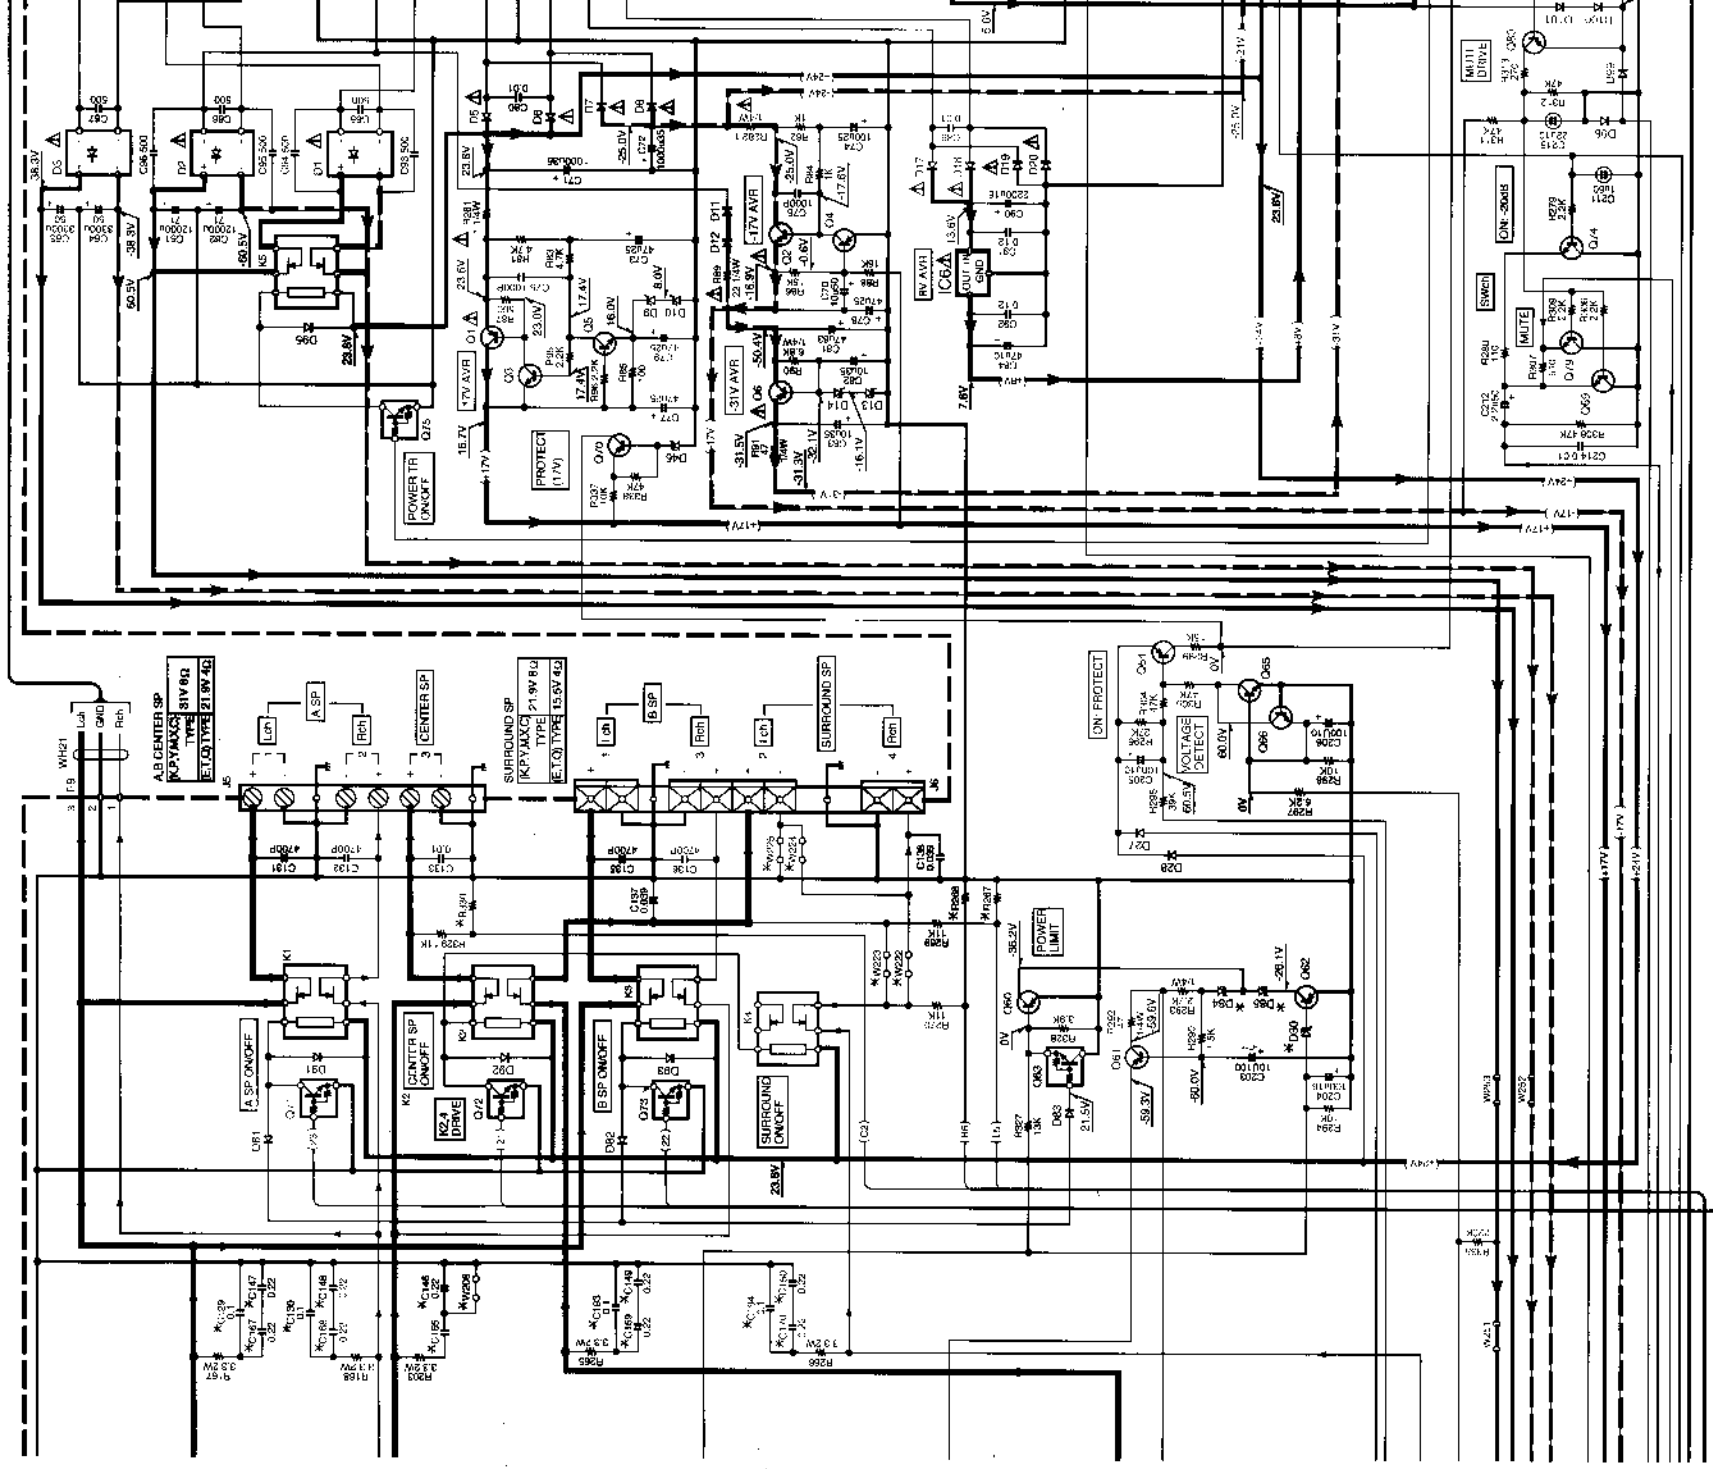


D65	R125, 126, 183, 227, 228	R125, 126, 183, 227, 228	R201, 204	D61, D62, D63, D64, D65	C139, 134, 151, 154, 254, 257, 258	C148, 150, 151, 152	S1	W008, 235	W029, 237, 238	W030, 238, 241
R125-126, 183, 227, 228	12K	8.2K	YES	NO	YES	NO	YES	NO	YES	NO
R125-126, 183, 227, 228	220		YES	NO	YES	NO	YES	NO	YES	NO

(X08-274X-XX) (B/3)

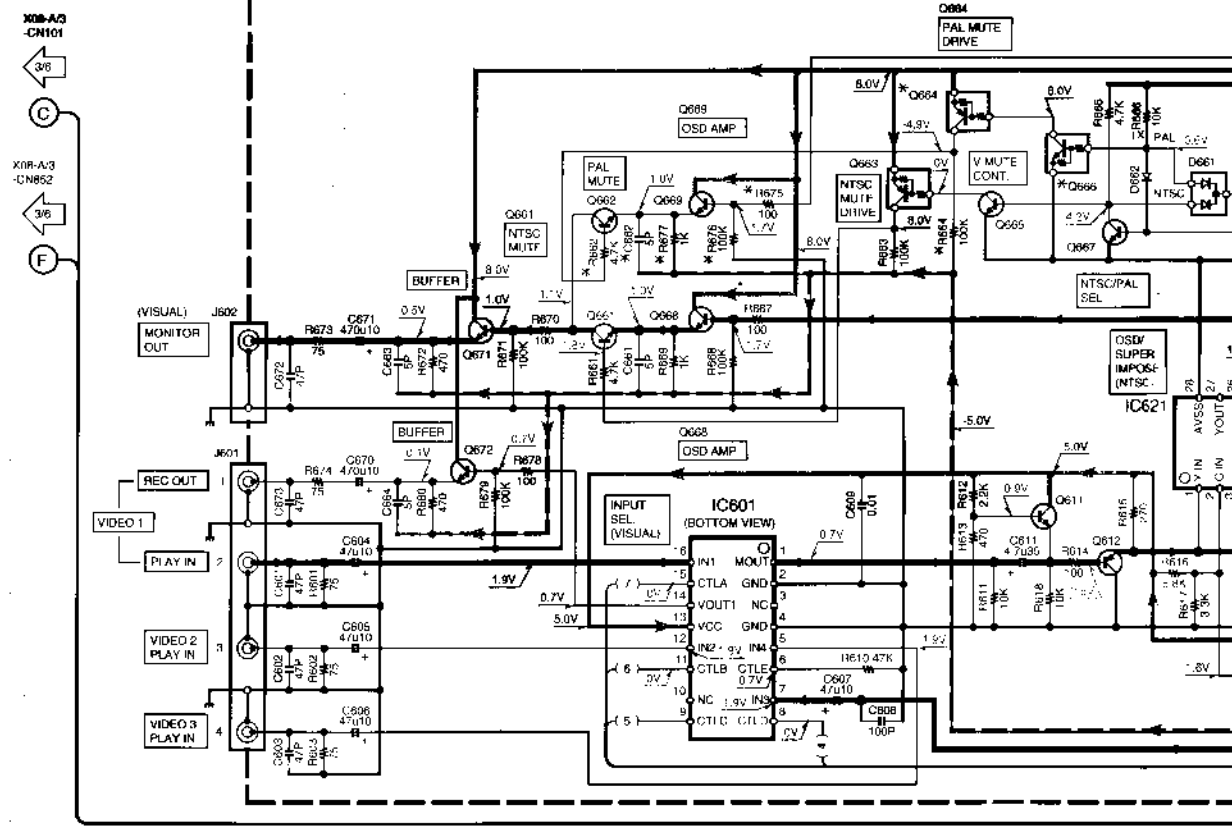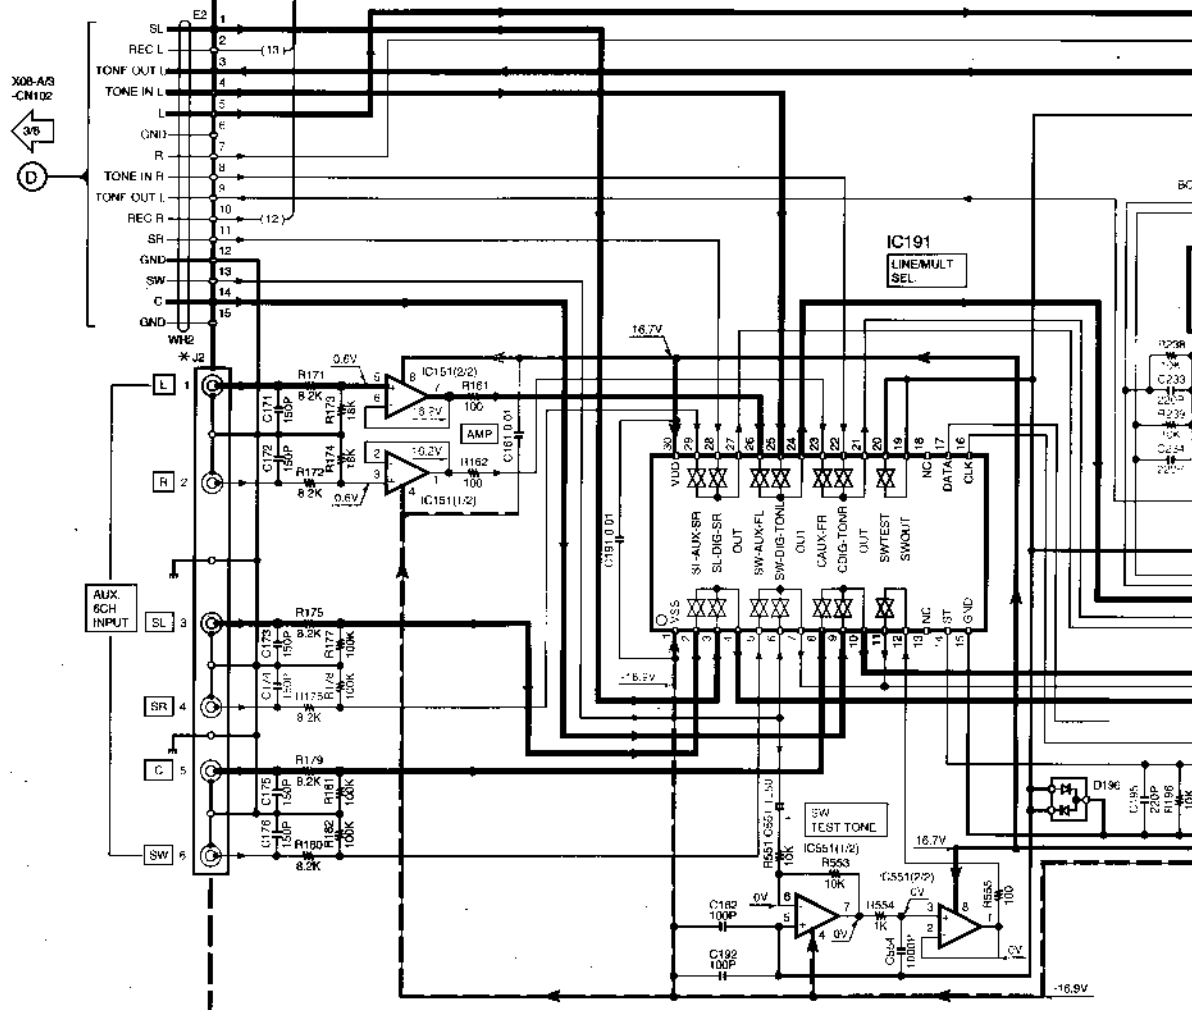


1
2
3
4
5
6
7

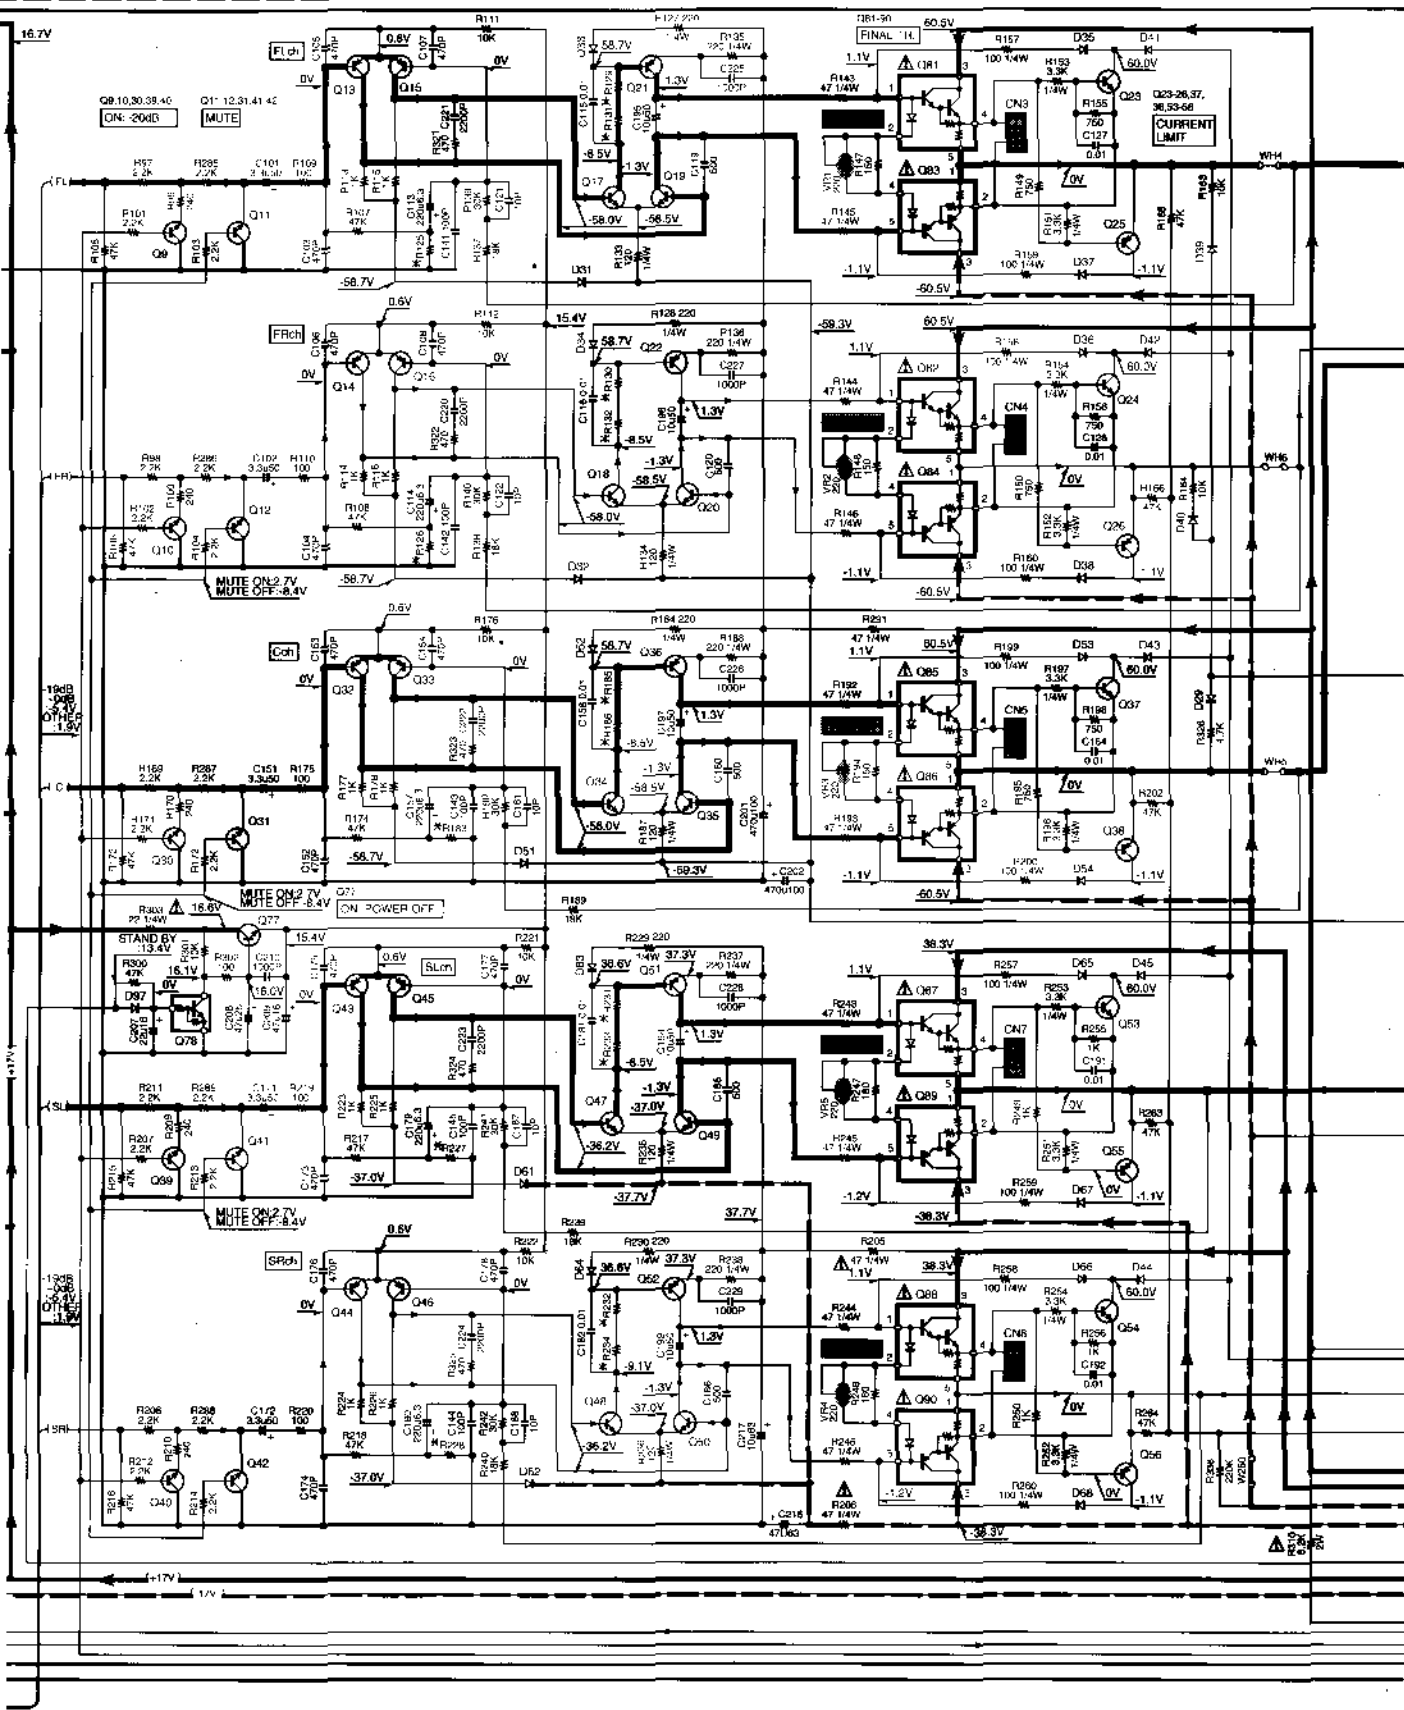

13800P (208-455X-XX)


DESTINATION	COUNTRY	ABB	UNIT No	A7	P1,2	H8	W11/8	WH11-9	F2	F3	F4,5	F6,7	CN11,12	T1	J3C	D84	
U.S.A.	R																
CANADA	P		010	603-0148	NO	YES	YES	NO	25V 3A	NC	25V 1A	175V 2A	125V 4A	NO	L07-2500	RD1156; RV 22 H2S 1NR21	RD244-535) or H2244(NB)
PX	Y		P-91		NO	NO	YES	YES	350V 7A L	250V 7A L	250V 7A R/M/A1	250V 11A	350V 13.15A L	YES	L07-2221		

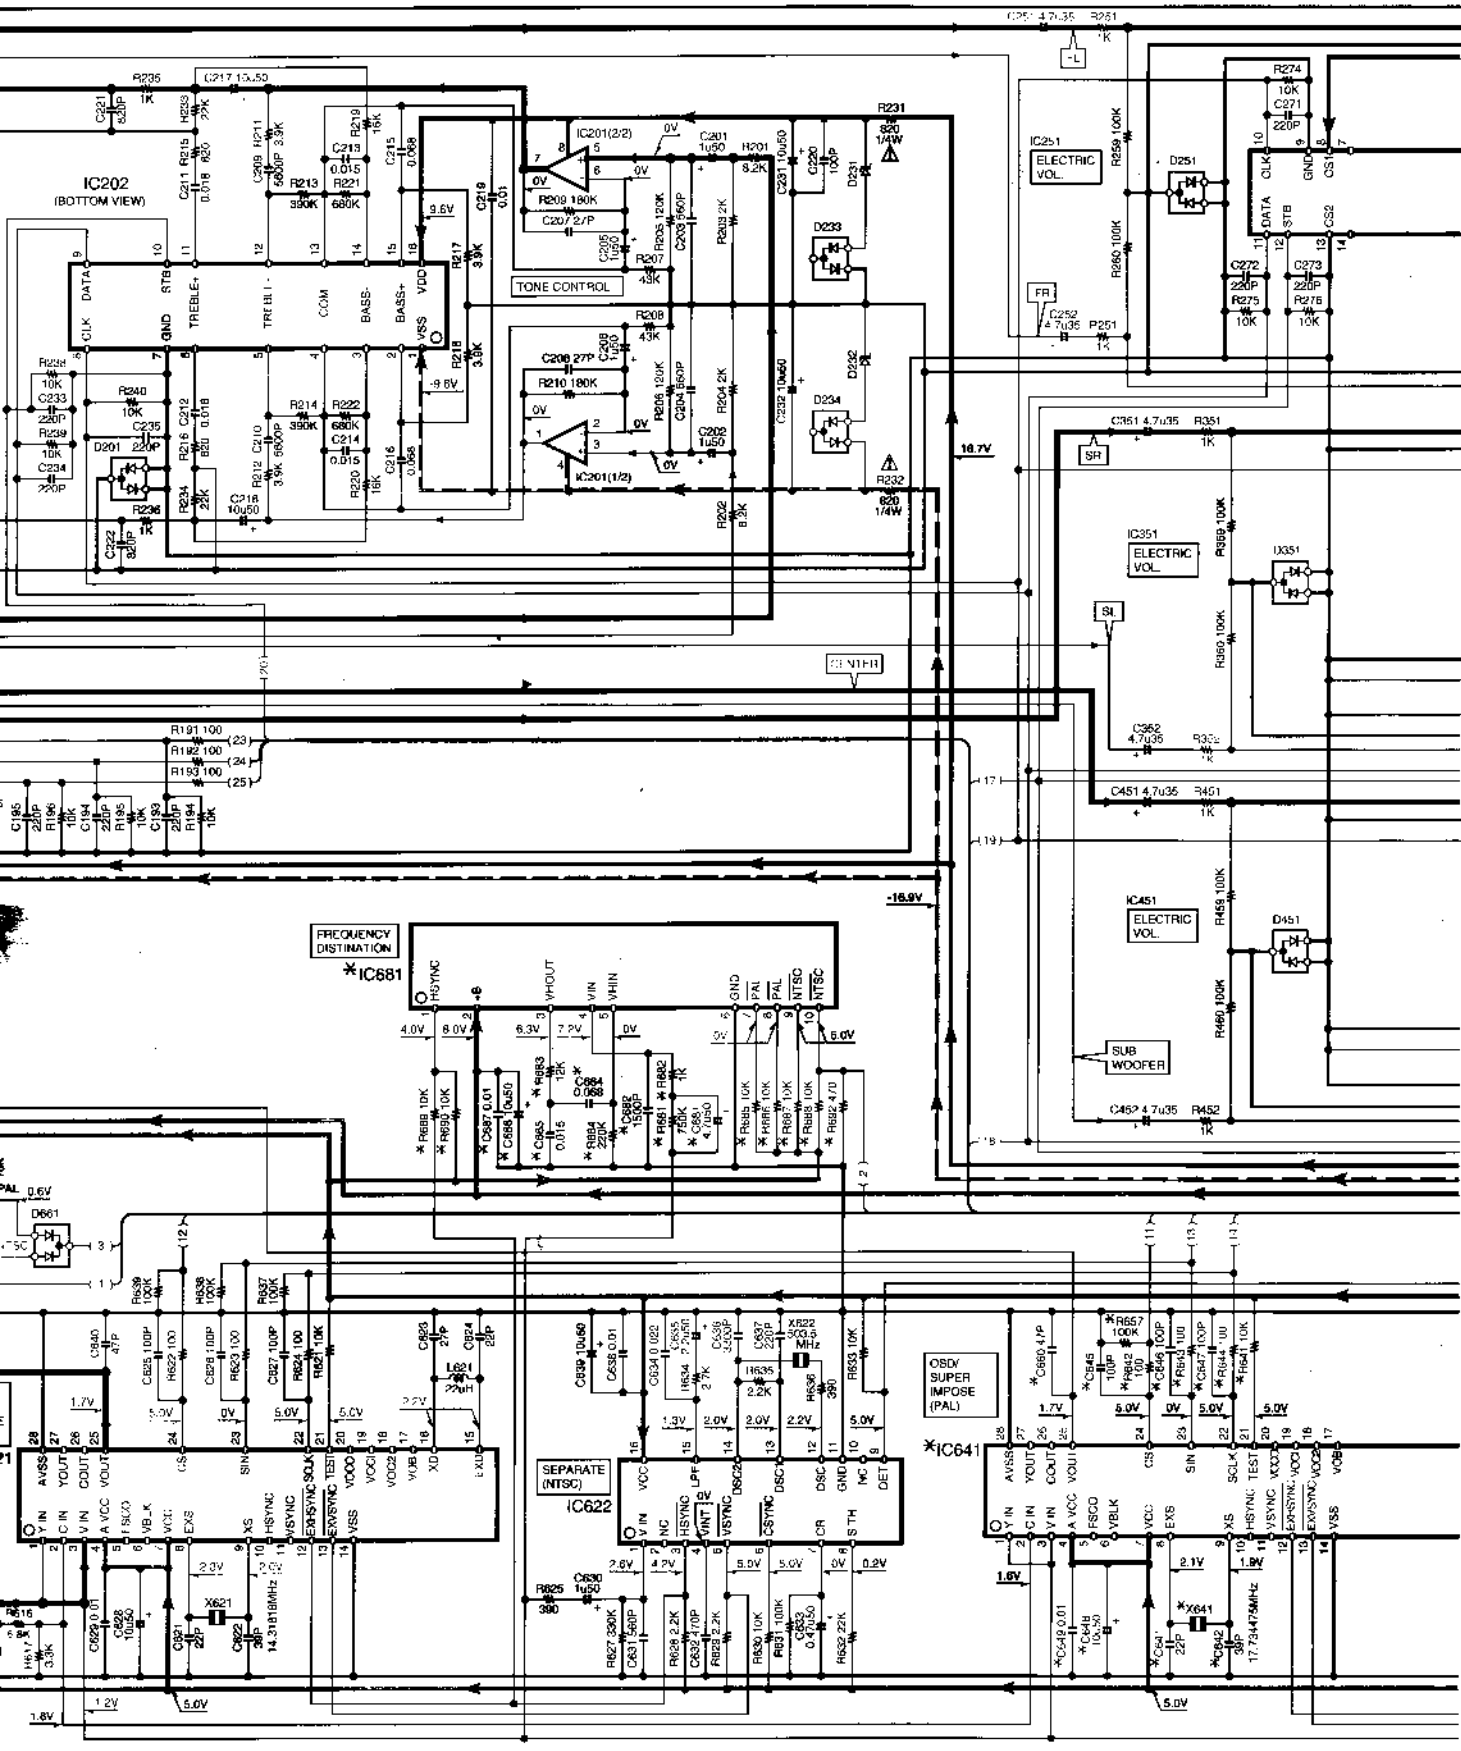

MAIN UNIT (X09-455X-XX) (A/4)

CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). Δ indicates safety critical components. For continued protection against risk of fire, replace only with same type and rating fuse(s). To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

The DC voltage is an actual reading measured with a high impedance type voltmeter with no signal input. The measurement value may vary depending on the measuring instruments used or on the product.

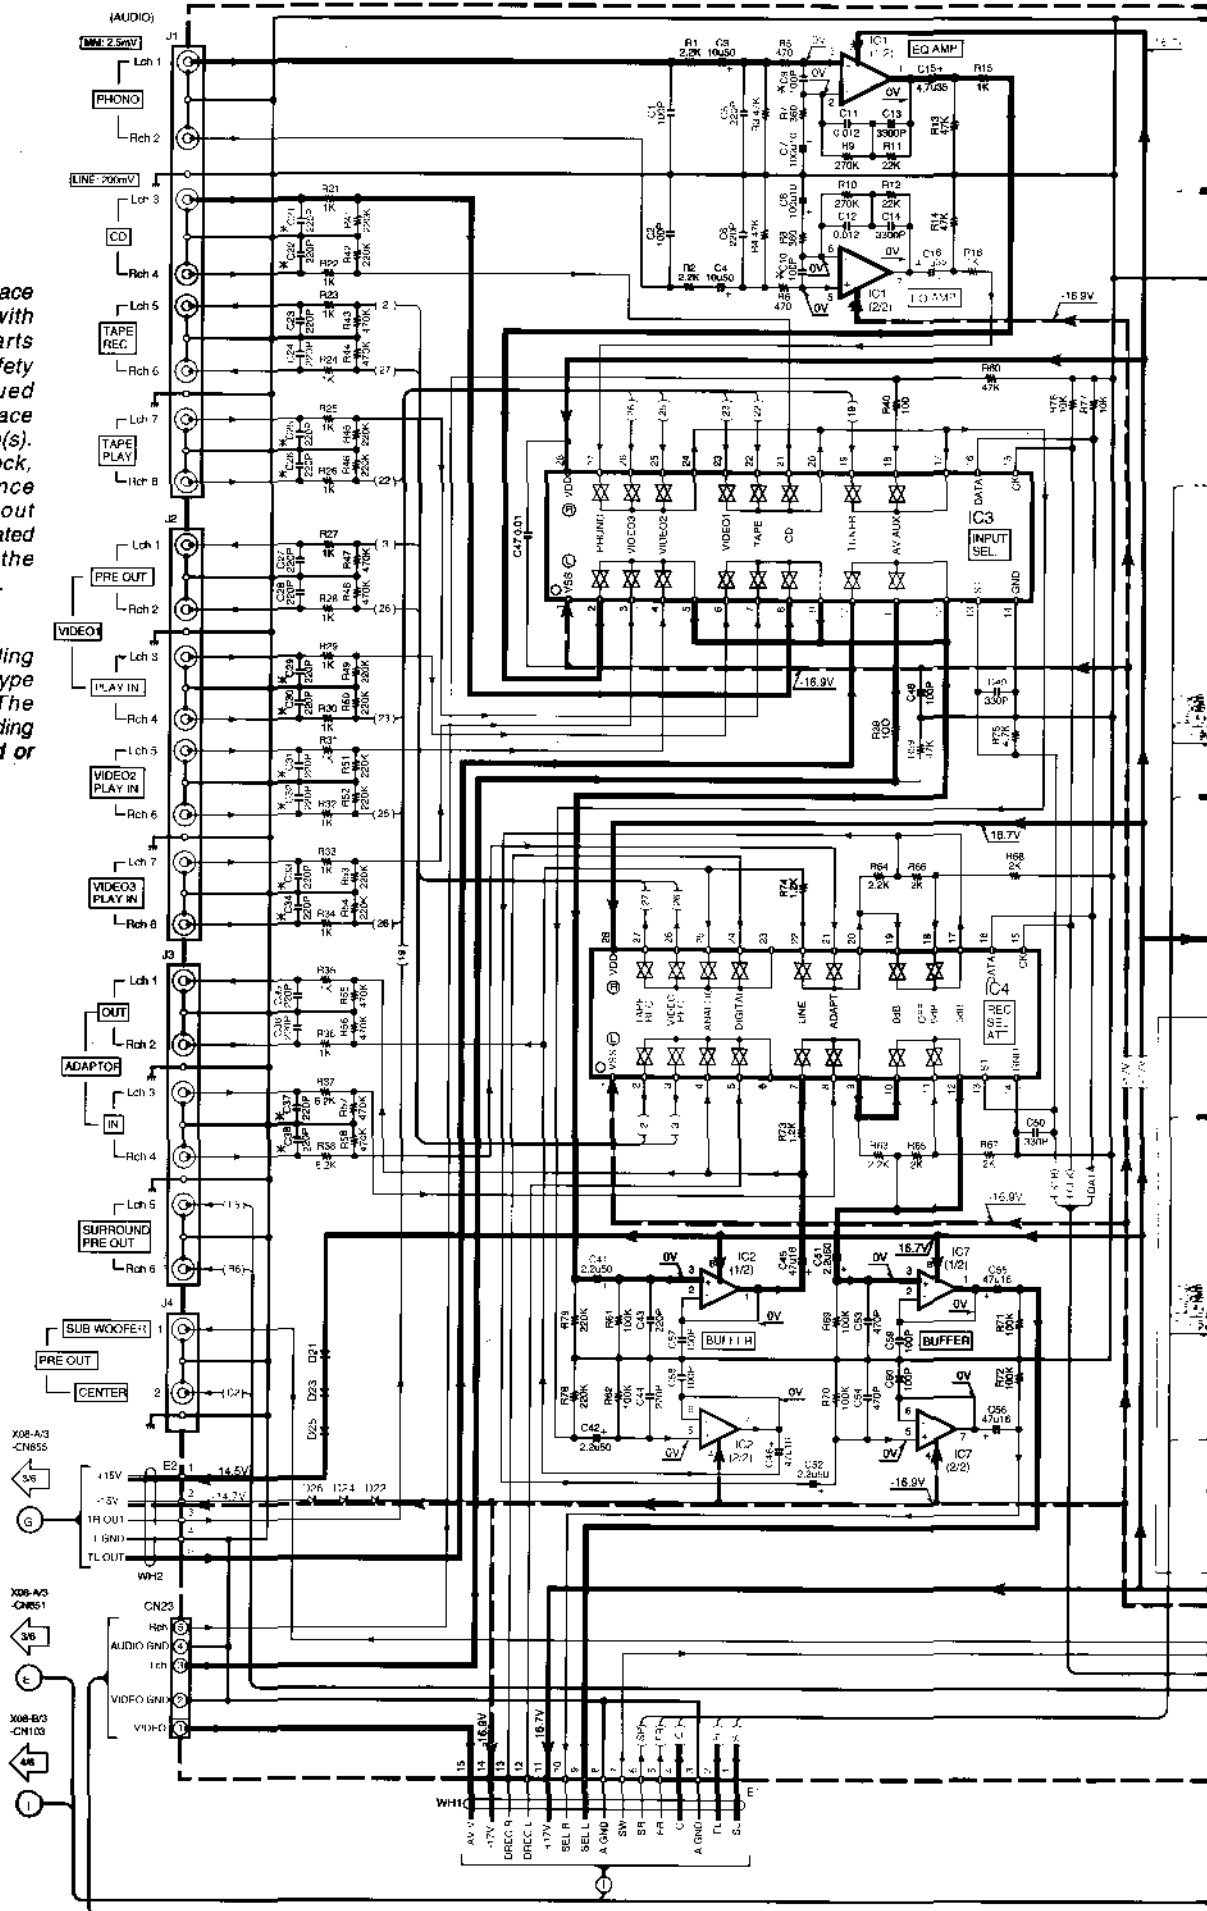


BI

BJ

BK

BL

BM

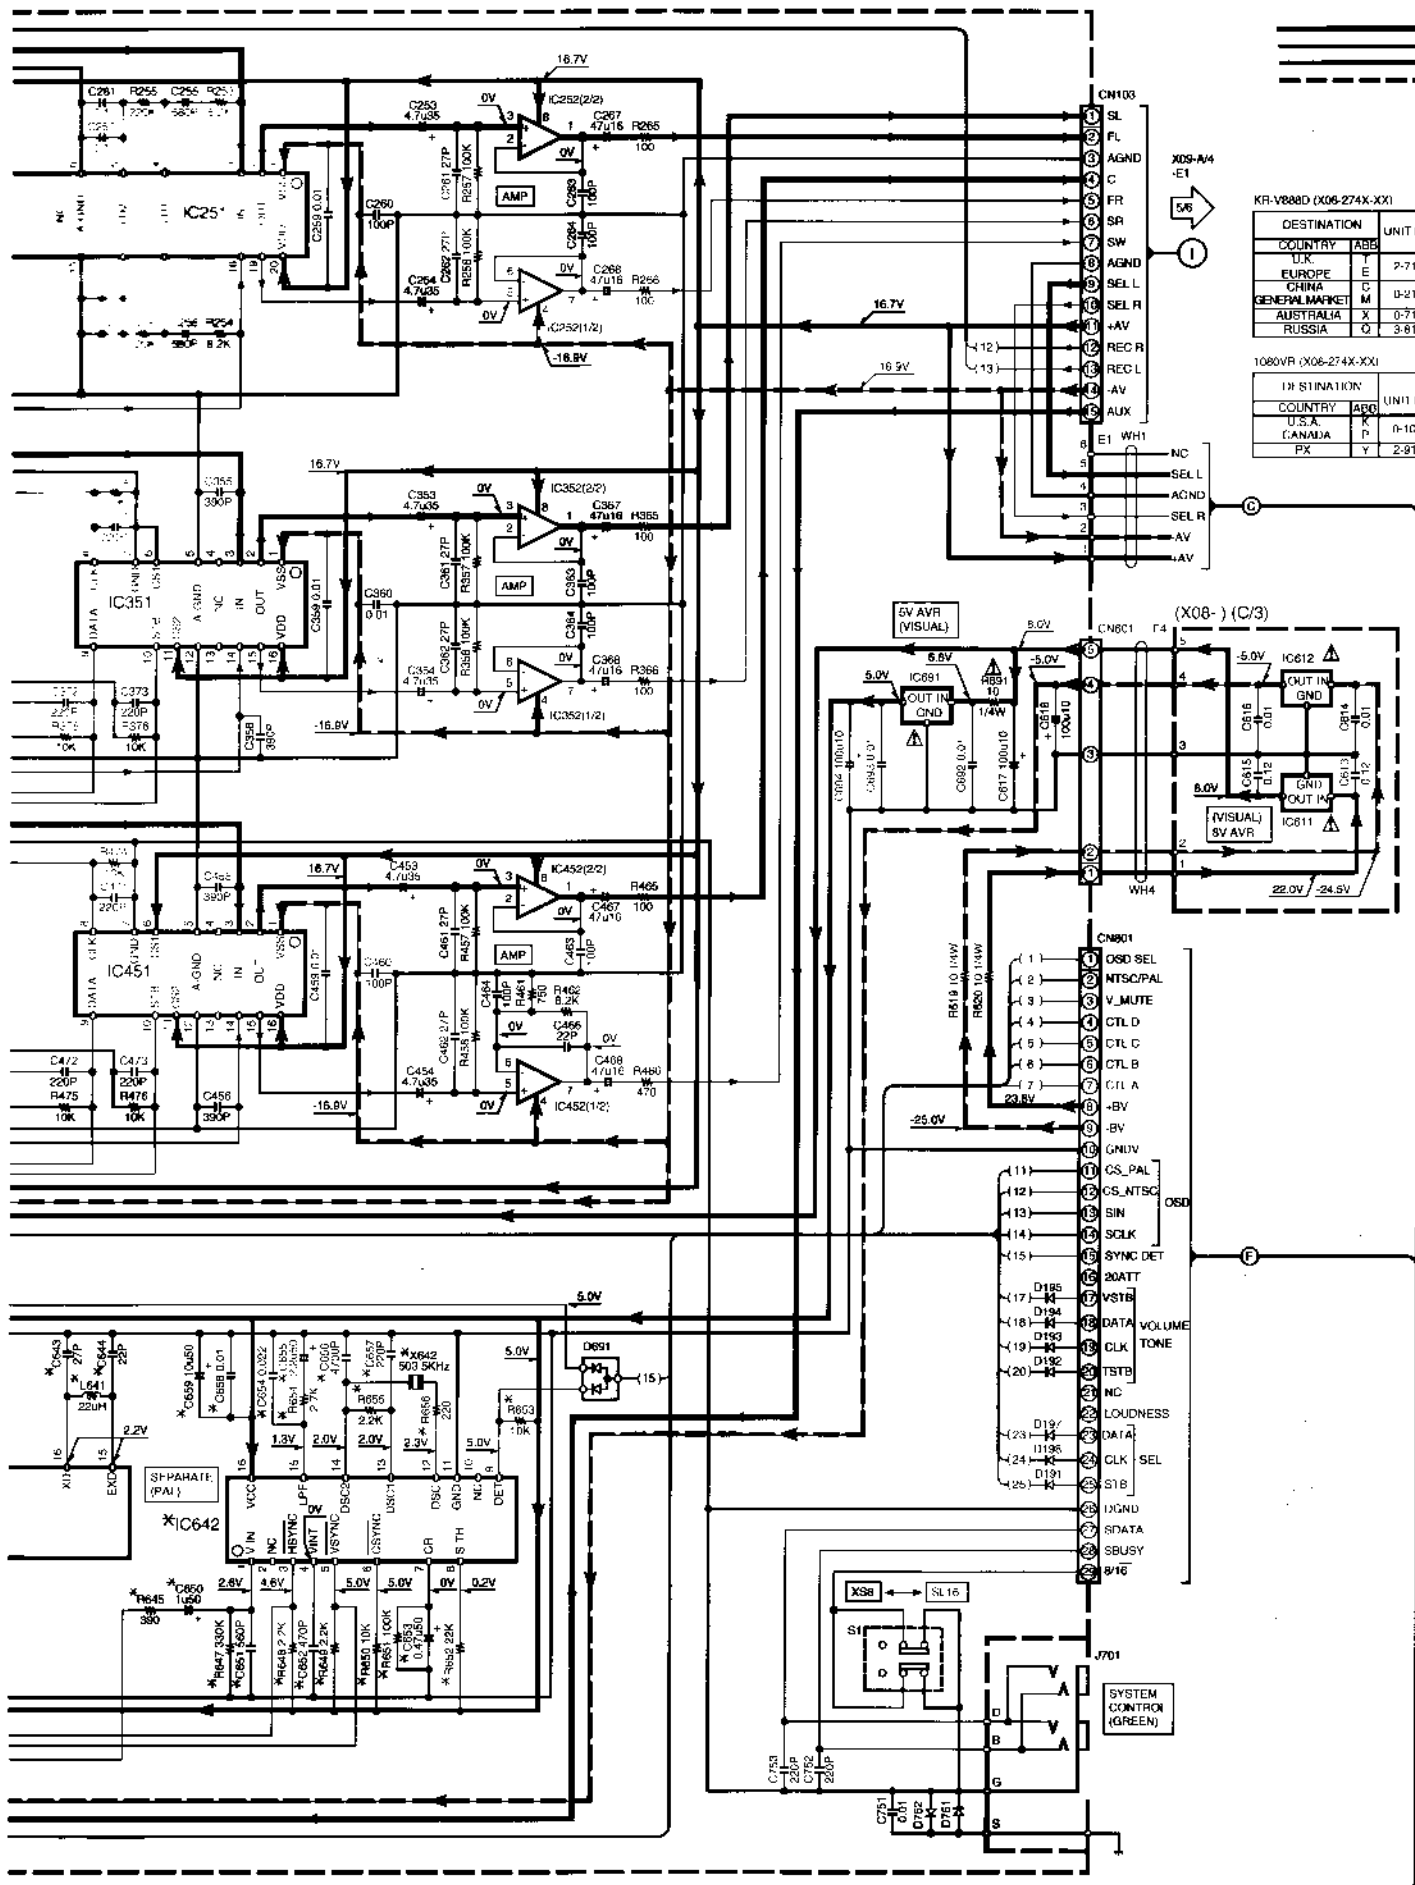

SIGNAL
GND L
+8 LIN
-8 LIN

KR-V888D (X06-274X-XX)

DESTINATION	COUNTRY	ABB	UNIT No.	IC64
U.K.	E	P	2-71	NO
EUROPE	E	M	0-21	YES
CHINA	C	M	0-21	YES
GENERAL MARKET				
AUSTRALIA	X	P	0-21	NO
RUSSIA	Q	P	3-81	NO

1080VR (X06-274X-XX)

DESTINATION	COUNTRY	ABB	UNIT No.	IC64
U.S.A.	X	P	0-10	NO
CANADA	X	P	0-10	NO
PX	Y	P	2-91	YES

