


SUPRA

MODEL: STV-2026W

FRONT VIEW

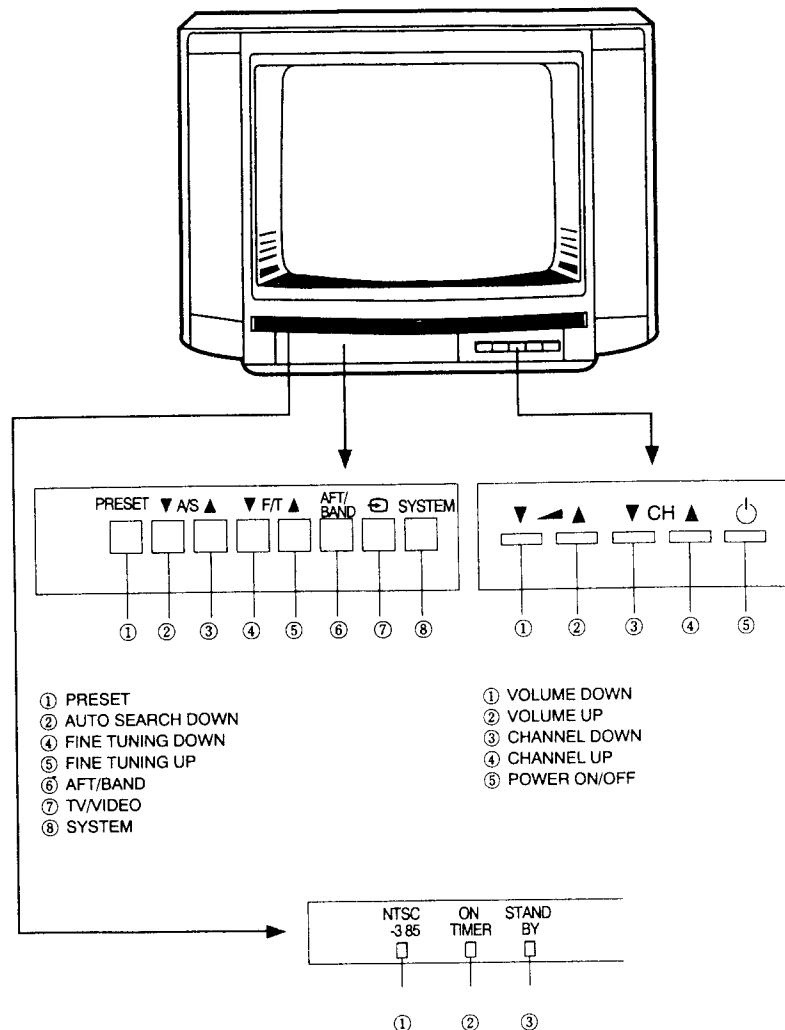


- ① PRESET
- ② AUTO SEARCH DOWN
- ④ FINE TUNING DOWN
- ⑤ FINE TUNING UP
- ⑥ AFT/BAND
- ⑦ TV/VIDEO
- ⑧ SYSTEM

- ① VOLUME DOWN
- ② VOLUME UP
- ③ CHANNEL DOWN
- ④ CHANNEL UP
- ⑤ POWER ON/OFF


- ① NTSC 3.58 INDICATOR
- ② ON TIMER INDICATOR
- ③ STAND BY INDICATOR

REMOTE CONTROLLER

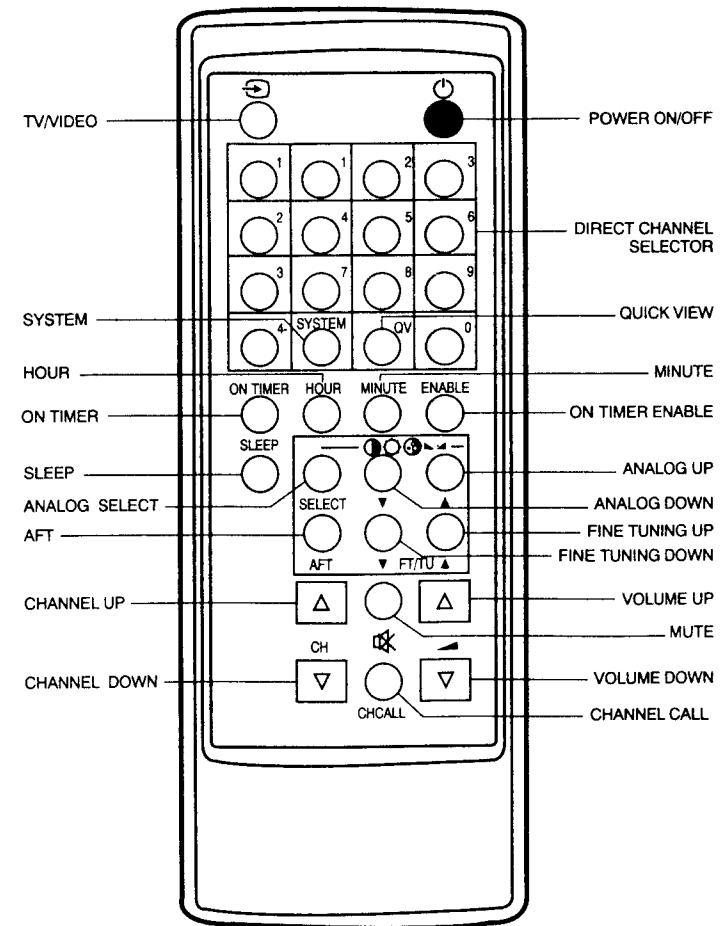

BLOCK DIAGRAM


- ① NTSC 3 58 INDICATOR
- ② ON TIMER INDICATOR
- ③ STAND BY INDICATOR

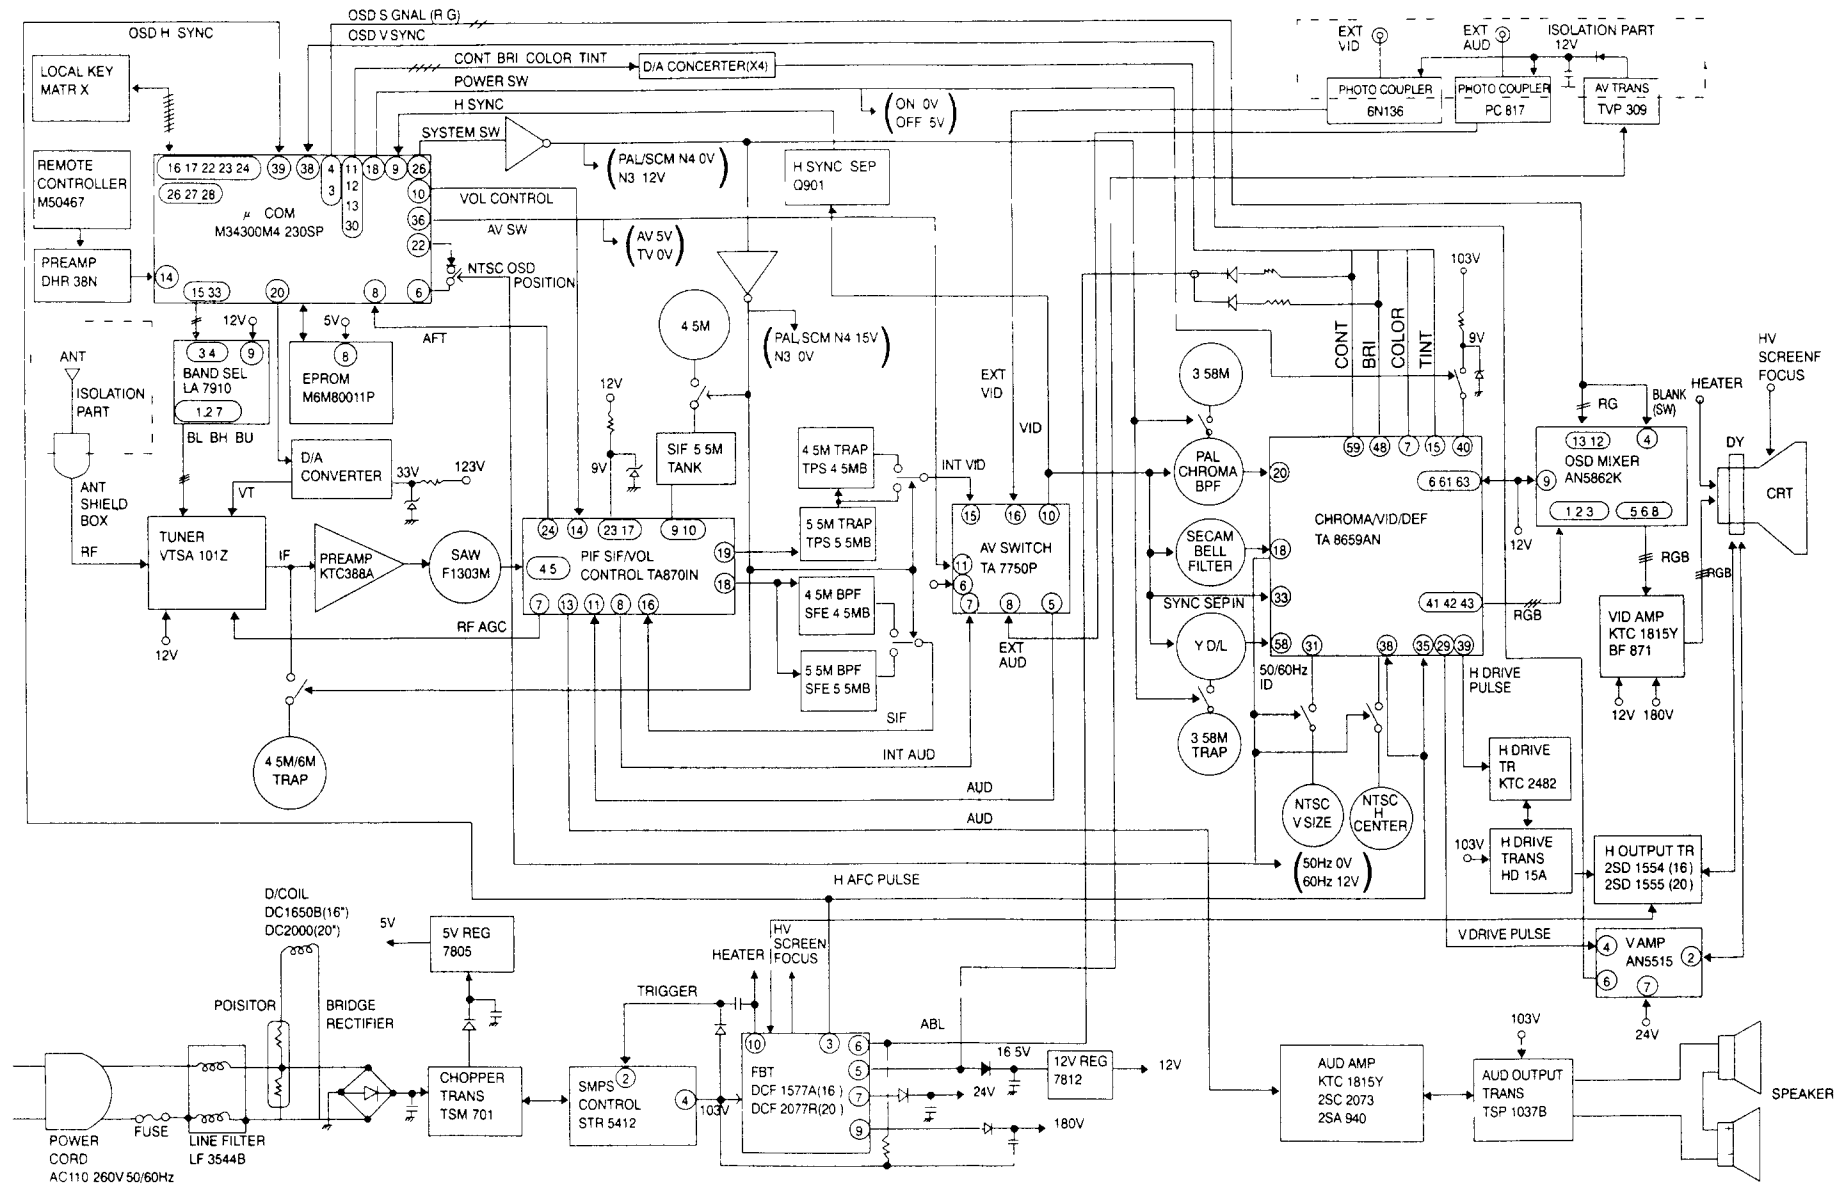


LOC	PART CODE	PART NAME	PART DESCRIPTION
R931	RD-AZ202J	R CARBON F LM	1/6 2K OHM J
R932	RD-AZ750J	R CARBON FILM	1/6 75 OHM J
R933	RA-AX303J	R ARRAY	DRB303J-9PIN 30K OHM
K934	RD-AZ562J	R CARBON FILM	1/6 5.6K OHM J
R935	RD-AZ303J	R CARBON FILM	1/6 30K OHM J
R936	RD-AZ562J	R CARBON FILM	1/6 5.6K OHM J
R937	RD-AZ303J	R CARBON FILM	1/6 30K OHM J
R940	RD-AZ103J	R CARBON FILM	1/6 10K OHM J
R941	RD-AZ103J	R CARBON FILM	1/6 10K OHM J
R942	RD-AZ103J	R CARBON FILM	1/6 10K OHM J
R944	RS022582J	R M OXIDE FILM	2W 5.8K OHM J
R945	RD-AZ282J	R CARBON FILM	1/6 82K OHM J
R946	RD-AZ472J	R CARBON FILM	1/6 4.7K OHM J
R947	RD-AZ103J	R CARBON FILM	1/6 10K OHM J
R948	RD-AZ472J	R CARBON FILM	1/6 4.7K OHM J
R949	RD-AZ470J	R CARBON FILM	1/6 47 OHM J
R950	RD-AZ333J	R CARBON FILM	1/6 33K OHM J
R951	RD-AZ912J	R CARBON FILM	1/6 9.1K OHM J
R952	RD-AZ882J	R CARBON FILM	1/6 8.8K OHM J
R953	RD-AZ562J	R CARBON FILM	1/6 5.6K OHM J
R956	RD-AZ123J	R CARBON FILM	1/6 12K OHM J
R957	RD-AZ102J	R CARBON FILM	1/6 1K OHM J
R958	RD-AZ103J	R CARBON FILM	1/6 10K OHM J
R959	RD-AZ333J	R CARBON FILM	1/6 33K OHM J
R960	RD-AZ103J	R CARBON FILM	1/6 10K OHM J
R961	RD-AZ103J	R CARBON FILM	1/6 10K OHM J
R962	RD-AZ222J	R CARBON FILM	1/6 2.2K OHM J
R963	RD-AZ473J	R CARBON FILM	1/6 47K OHM J
R964	RD-AZ151J	R CARBON FILM	1/6 150 OHM J
R965	RD-AZ823J	R CARBON FILM	1/6 82K OHM J
R966	RD-AZ473J	R CARBON FILM	1/6 47K OHM J
R969	RD-AZ151J	R CARBON FILM	1/6 150 OHM J
R970	RD-AZ103J	R CARBON FILM	1/6 10K OHM J
R971	RD-AZ473J	R CARBON FILM	1/6 47K OHM J
R972	RD-AZ183J	R CARBON FILM	1/6 18K OHM J
R973	RD-AZ274J	R CARBON FILM	1/6 270K OHM J
R974	RD-AZ103J	R CARBON FILM	1/6 10K OHM J
R975	RD-AZ563J	R CARBON FILM	1/6 56K OHM J
R976	RD-AZ913J	R CARBON FILM	1/6 91K OHM J
R977	RD-AZ382J	R CARBON FILM	1/6 3.8K OHM J
SF101	5PTSF1303M	FILTER SAW	TSF1303M
SW901	5S40101159	SW TACT	SKHHLM4Z
SW902	5S40101159	SW TACT	SKHHLM4Z
SW903	5S40101159	SW TACT	SKHHLM4Z
SW904	5S40101159	SW TACT	SKHHLM4Z
SW905	5S40101159	SW TACT	SKHHLM4Z
SW906	5S40101159	SW TACT	SKHHLM4Z
SW907	5S40101159	SW TACT	SKHHLM4Z
SW908	5S40101159	SW TACT	SKHHLM4Z
SW909	5S40101159	SW TACT	SKHHLM4Z
SW910	5S40101159	SW TACT	SKHHLM4Z
SW911	5S40101159	SW TACT	SKHHLM4Z
SW912	5S40101159	SW TACT	SKHHLM4Z
SW913	5S40101159	SW TACT	SKHHLM4Z
T401	5TD0000012	TRANS DRIVE	HD-15A
T402	5TH1000072	FBT	DCF-1577 A
T402	50H0000075	FBT	DCF-2077 A
T601	5TK000010	TRANS SOUND OUT	TSP-1037 B
T701	5TP0000091	TRANS A/V	TVP-309
VR119	RV5417103	R SEMI FIXED	H1051B-B 10K
VR214	RV5417103	R SEMI FIXED	H1051A-B 10K
VR302	RV5417103	R SEMI FIXED	H1051A-B 10K
VR315	RV5417104	R SEMI FIXED	H1051A-B 100K
VR411	RV5417101	R SEMI FIXED	H1051A 100B
VR528	RV5417102	R SEMI FIXED	H1051A-1KB
VR712	RV5417102	R SEMI FIXED	H1051A-1KB
VR723	RV5417202	R SEMI FIXED	1/10 2K OHM B VBEK-P V (1S)
VT01	4859707030	TUNER VARACTOR	VTSA-101Z
X401	4850L00710	RESONATOR CERA	CSB503F5

LOC	PART CODE	PART NAME	PART DESCRIPTION
X160	4850L00610	RESONATOR CERA	CSB 500E
Z180	5PSFE55MB	FILTER CERA	SFE 5 5MB
Z161	5PSFE65MB	FILTER CERA	SFE 6 5MB

TA8701N

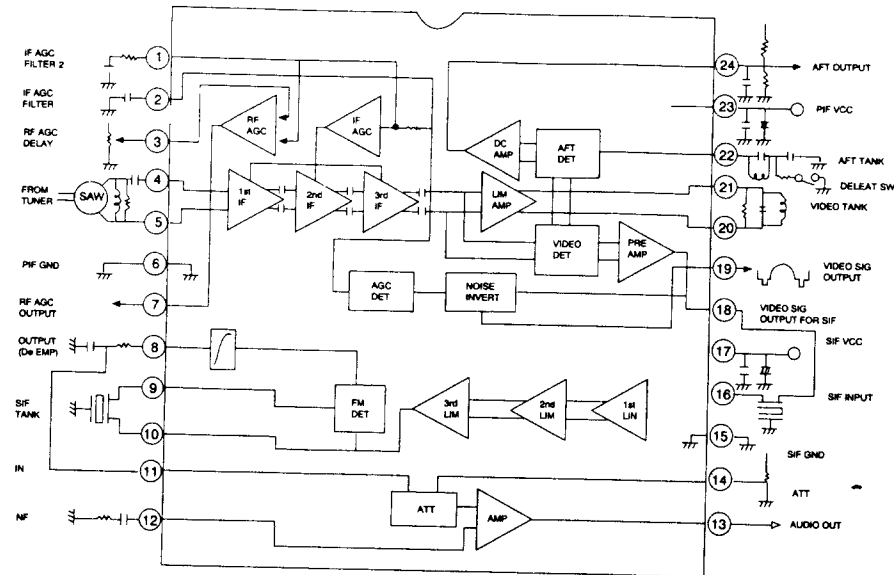


TA7750P


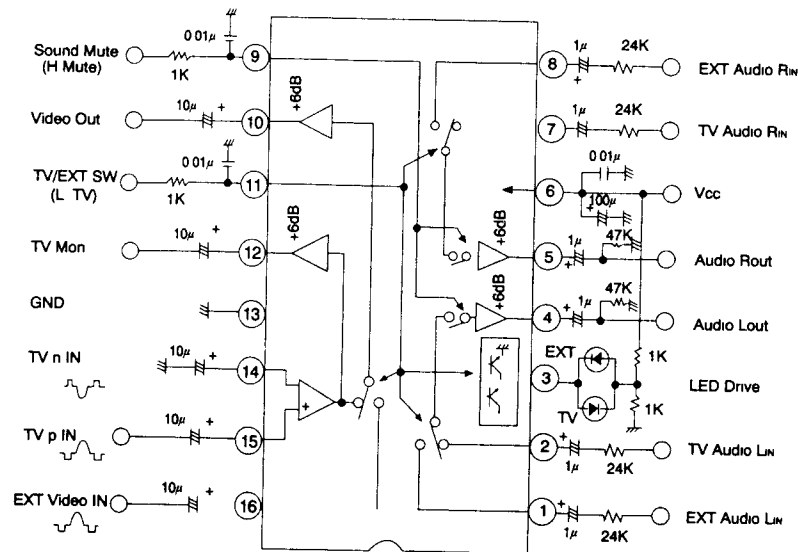


* Composite video signal with sync positive going should be applied to pin 14
The external parts of pin 14 and pin 15 should be exchanged

AN 5882K



AN5515

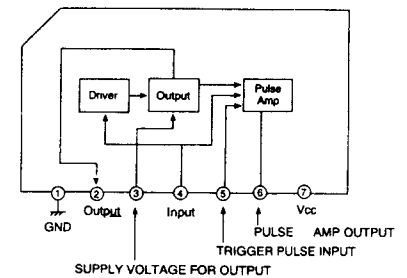

VR214	RV5417103	R SEMI FIXED	H1051A-B 10K
VR302	RV5417103	R SEMI FIXED	H1051A-B 10K
VR315	RV5417104	R SEMI FIXED	H1051A-B 100K
VR411	RV5417101	R SEMI FIXED	H1051A 100B
VR528	RV5417102	R SEMI FIXED	H1051A-1KB
VR712	RV5417102	R SEMI FIXED	H1051A-1KB
VR723	RV5417202	R SEMI FIXED	1/10 2K OHM B V6EK-P V (1S)
VT01	4850707030	TUNER VARACTOR	VTSA-101Z
X401	4850L00710	RESONATOR CERA	CSB503F5
X501	5XA4R4338D	FILTER CRYSTAL	HC-48U 4 433619MHZ
X502	5XA3R5795E	FILTER CRYSTAL	HC-48U 3.579565MHZ
X901	5XA4R0000C	CRYSTAL QUARTZ	4 000706 (4 000000MHZ)
Z101	5PTPS45MB	FILTER CERA	TPS-4.5MB (TRA.P)
Z102	5PTPS55MB	FILTER CERA	TPS-5.5MB
Z103	5PSF55MB	FILTER CERA	SFE 5.5MB
Z104	5PSF345MB	FILTER CERA	SFE 4.5MB
00010	4853635300	FRAME CHASSIS	FR ABS BK
00020	7128301211	SCREW TAPPING	T2S WAS 3x12
00030	4857227500	SHIELD PLATE	SPTH-C TO 3

TERM ANT BOARD AS

P701	4850704026	CONN AS	YH025-04 + YST025 + USW = 360
*P701	4850704027	CONN AS	YH025-04 + YST025 + USW = 450
00010	4850A15640	ANT SHIELD BOX	DSW-3022-450H
00010	4850A15640	ANT SHIELD BOX	DSW-3022-800H
00020	4853621304	TERMINAL ANT	HIPS BK
00020	4853623110	TERMINAL ANT	HIPS BK (SCART JACK OPTION)
00030	4850825923	PCB SCART	T1 6x114x465 (SCART JACK OPTION)

COVER BACK AS

00010	4852123203	COVER BACK	HIPS BK
*00010	4852123403	COVER BACK	HIPS BK
00020	4855412900	SPEC PLATE	A1050P H24 TO 4 24L
*00020	4855415800	SPEC PLATE	150ART P/E FILM
00030	4857817611	CLOTH BLACK	FELT TO 7 L 200
*00030	4857817600	CLOTH BLACK	CLOTH TO 7 L=300
00040	7122401411	SCREW TAPPING	T2S TRS 4X14 MFZE
00050	7122401412	SCREW TAPPING	T2S TRS 4X14 MFZN BK

ACCESSORY AS

00010	4850A02510	ANT ROD	TSA 8108E L=600MM
00030	4858213800	BAG 1NSTRCT	PC FILM TO 06X280X35
00040	47P7500001	BATTERY	AAM UM 3 1.5V
00050	4859003150	JACK PHONE PLUG AS	RTP-002-01 WH/R 1000MM
02020	4850A00150	TRANS ANT MATCHING	IMT-02

PACKING AS

00010	4858147600	PAD	FOAM STYRL
*00010	4858147700	PAD	FOAM STYROL
00020	4858028000	BOX CARTON	DW 2 PRINT
*00020	4858028100	BOX CARTON	DW 2
00030	4858281100	PE FILM	TO 03X1100X1000
*00030	4858281300	PE FILM	TO 02X1300X1000

TRANSMITTER REMOCON


00100	48B0N0911B	TRANSMITTER REMOCON	R 11B
-------	------------	---------------------	-------

SIF CONVERTER AS (VK ONLY)


00010	4859806116	PCB SIF CONVERTER	T1 6X124X75/10
C160	CCXB1H471K	C CERA	HIK 50V 470PF K
C161	CCXB1H471K	C CERA	HIK 50V 470PF K
C162	CCXB1H510J	C CERA	CH 50V 51PF J
I601	1TA8710S	IC	TA 8710S
J160	4859241620	CONN WAFER	YFAW 025-05
L160	5CPZ330J02	COIL PEAKING	33µ H J
R160	RD-AZ172J	R CARBON FILM	1/6 1K OHM J
R161	RD-AZ172J	R CARBON FILM	1/6 1K OHM J
R162	RD-AZ102L	R CARBON FILM	1/6 1K OHM J

* Composite video signal with sync positive going should be applied to pin 14
The external parts of pin 14 and pin 15 should be exchanged



AN 5862K

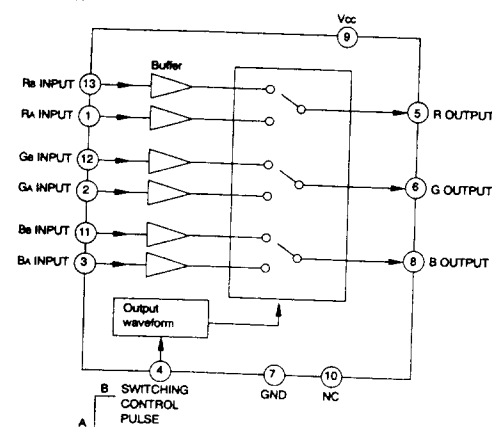

M6M8001P

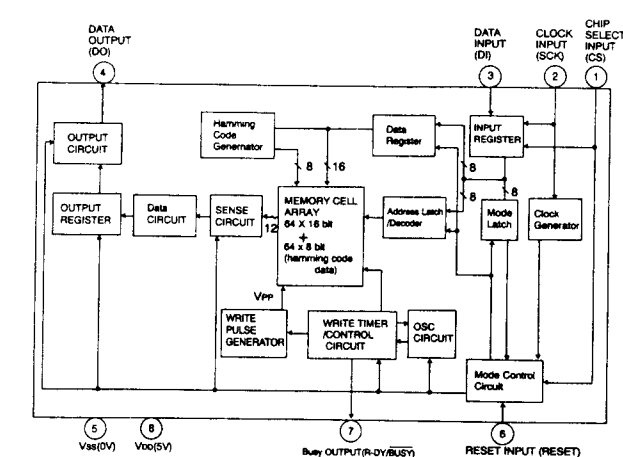

8 STR5412

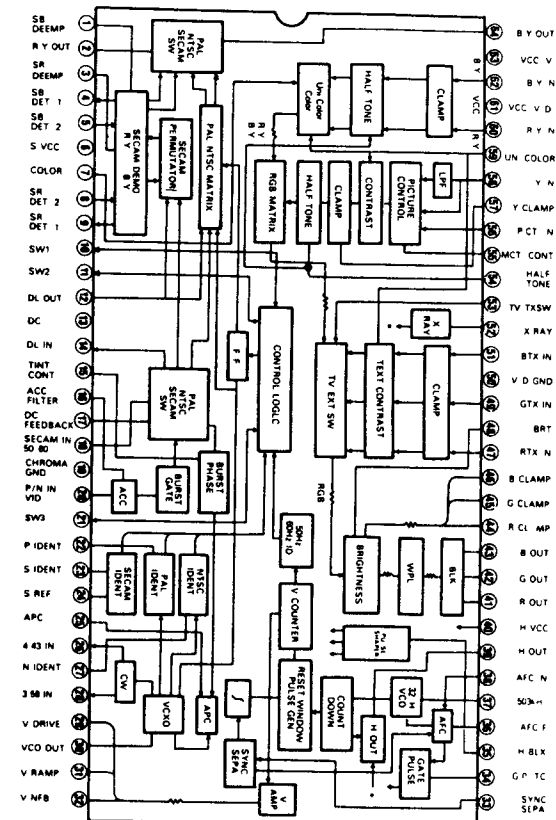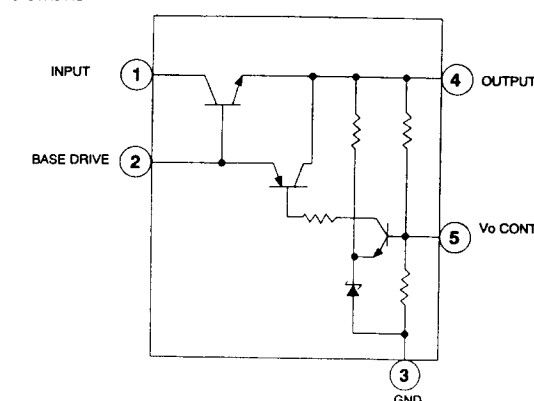

- 1 RESISTANCE VALUES ARE IN OHMS
- 2 CAPACITANCE VALUES LESS THAN 1
ARE IN pF AND THOSE MORE THAN
1 IN pF
- 3 INDUCTANCE VALUES ARE IN uH
- 4 THIS SCHEMATIC DIAGRAM CAN BE
CHANGED WITHOUT NOTICE

THE SHADED AREAS IN THE SCHEMATIC DIAGRAM
DESIGNATE COMPONENTS WHICH HAVE SPECIAL
CHARACTERISTICS IMPORTANT FOR SAFETY AND
SHOULD BE REPLACED ONLY WITH TYPES IDENTICAL
TO THOSE IN THE ORIGINAL CIRCUIT OR SPECIFIED
IN THE PARTS LIST
DON'T DEGRADE THE SAFETY OF THE RECEIVER THROUGH
IMPROPER SERVICING



MAIN BOARD



...
 SCHEMATIC DIAGRAM CHASSIS : C - 51
 (PAL/SECAM - B/G.D/K. NTSC - 3.58/4.43 SYSTEM)

