



Service Manual

Built-in oven

AKP 237 IX

Model Version		Page
	AKP 237 IX 8577 237 01010	
	Technical data	2
	Spare part list	3
	Exploded view	4
	Wiring diagram	5 - 6

Technical data

Electrical connection


Rated voltage	230 V ~		
Main connection	230 V	1N~ 50	Hz
Total connected load	2500		W
Upper heating element / Grill	900/2500		W
Lower heating element	1150		W

Electrical components

Auto timer Electronic timer

Accessories

Fat pan enameled	375 x 445,5	mm
Grid chrome	446,5 x 340	mm

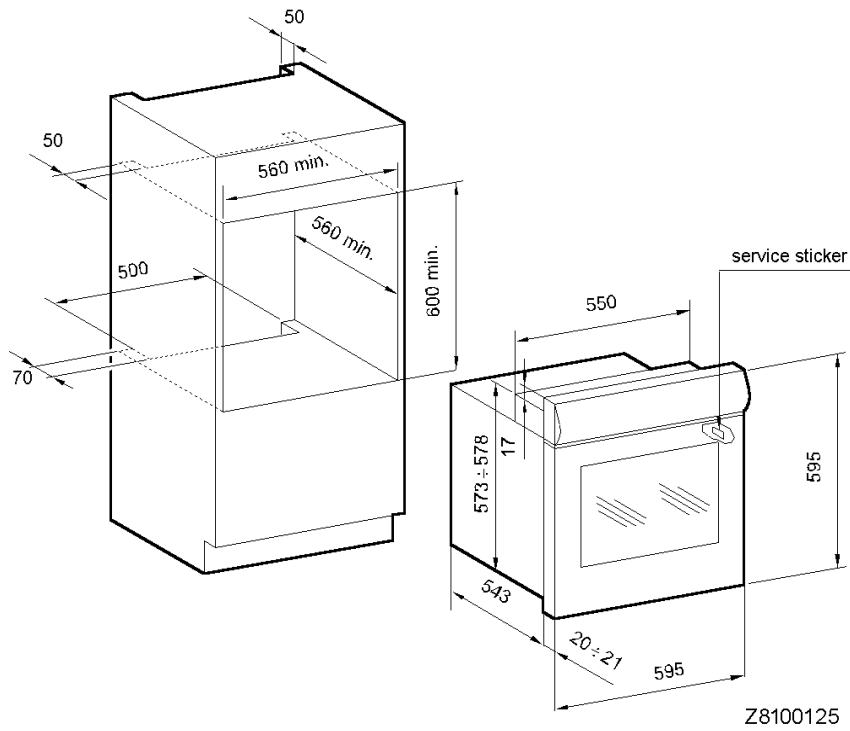


Spare part list


Model AKP 237 IX
Service No. 857723701010
Version 857723701010

Pos. No.	12NC Code	Description
022 1	4812 460 79059	Trim, side
040 0	4812 417 19143	Hinge
047 0	4812 417 19137	Hinge run.mech.
110 0	4812 498 18245	Door handle
110 1	4819 462 48456	Rubber ring
121 0	4812 440 39326	Door, inner + glass
121 3	4812 460 78913	Profile
121 4	4812 460 98069	Deflector
141 0	4812 450 58773	Oven glass + profile
191 0	4812 466 88684	Gasket
201 0	4819 442 38092	Panel, rear
245 0	4819 458 19991	Oven shelf
247 0	4819 418 38367	Tray, leak
301 0	4812 452 48733	Panel, control
301 4	4819 453 59373	Glass panel timer
332 0	4812 410 28677	Button, push
334 0	4812 412 78933	Knob
351 0	4819 134 48424	Pilot lamp
354 0	4819 462 79749	Lens red
354 3	4812 404 38607	Guide
440 0	4812 361 18399	Motor, fan
441 0	4812 361 18393	Ventilator cooling
441 1	4819 468 18387	Gasket border
443 0	4819 515 48065	Fan wheel
452 0	4812 259 98422	Heating element upper/grill
456 0	4812 259 98421	Heating element lower 1150 W
490 1	4812 290 68255	Clamp, cable
491 0	4812 290 68273	Connection block
500 0	4812 282 19534	Timer
554 0	4812 282 08627	Thermostat
557 0	4812 282 28271	Temper. limiter
620 0	4812 273 28151	Switch, oven
651 0	4819 134 88153	Lamp, oven
652 0	4819 255 18237	Holder, lamp rear
656 0	4819 450 69844	Lamp screen rear
915 0	4819 505 18145	Nut
993 0	4812 310 48185	Mounting kit
993 1	4812 460 79072	Trim, kit

Exploded view

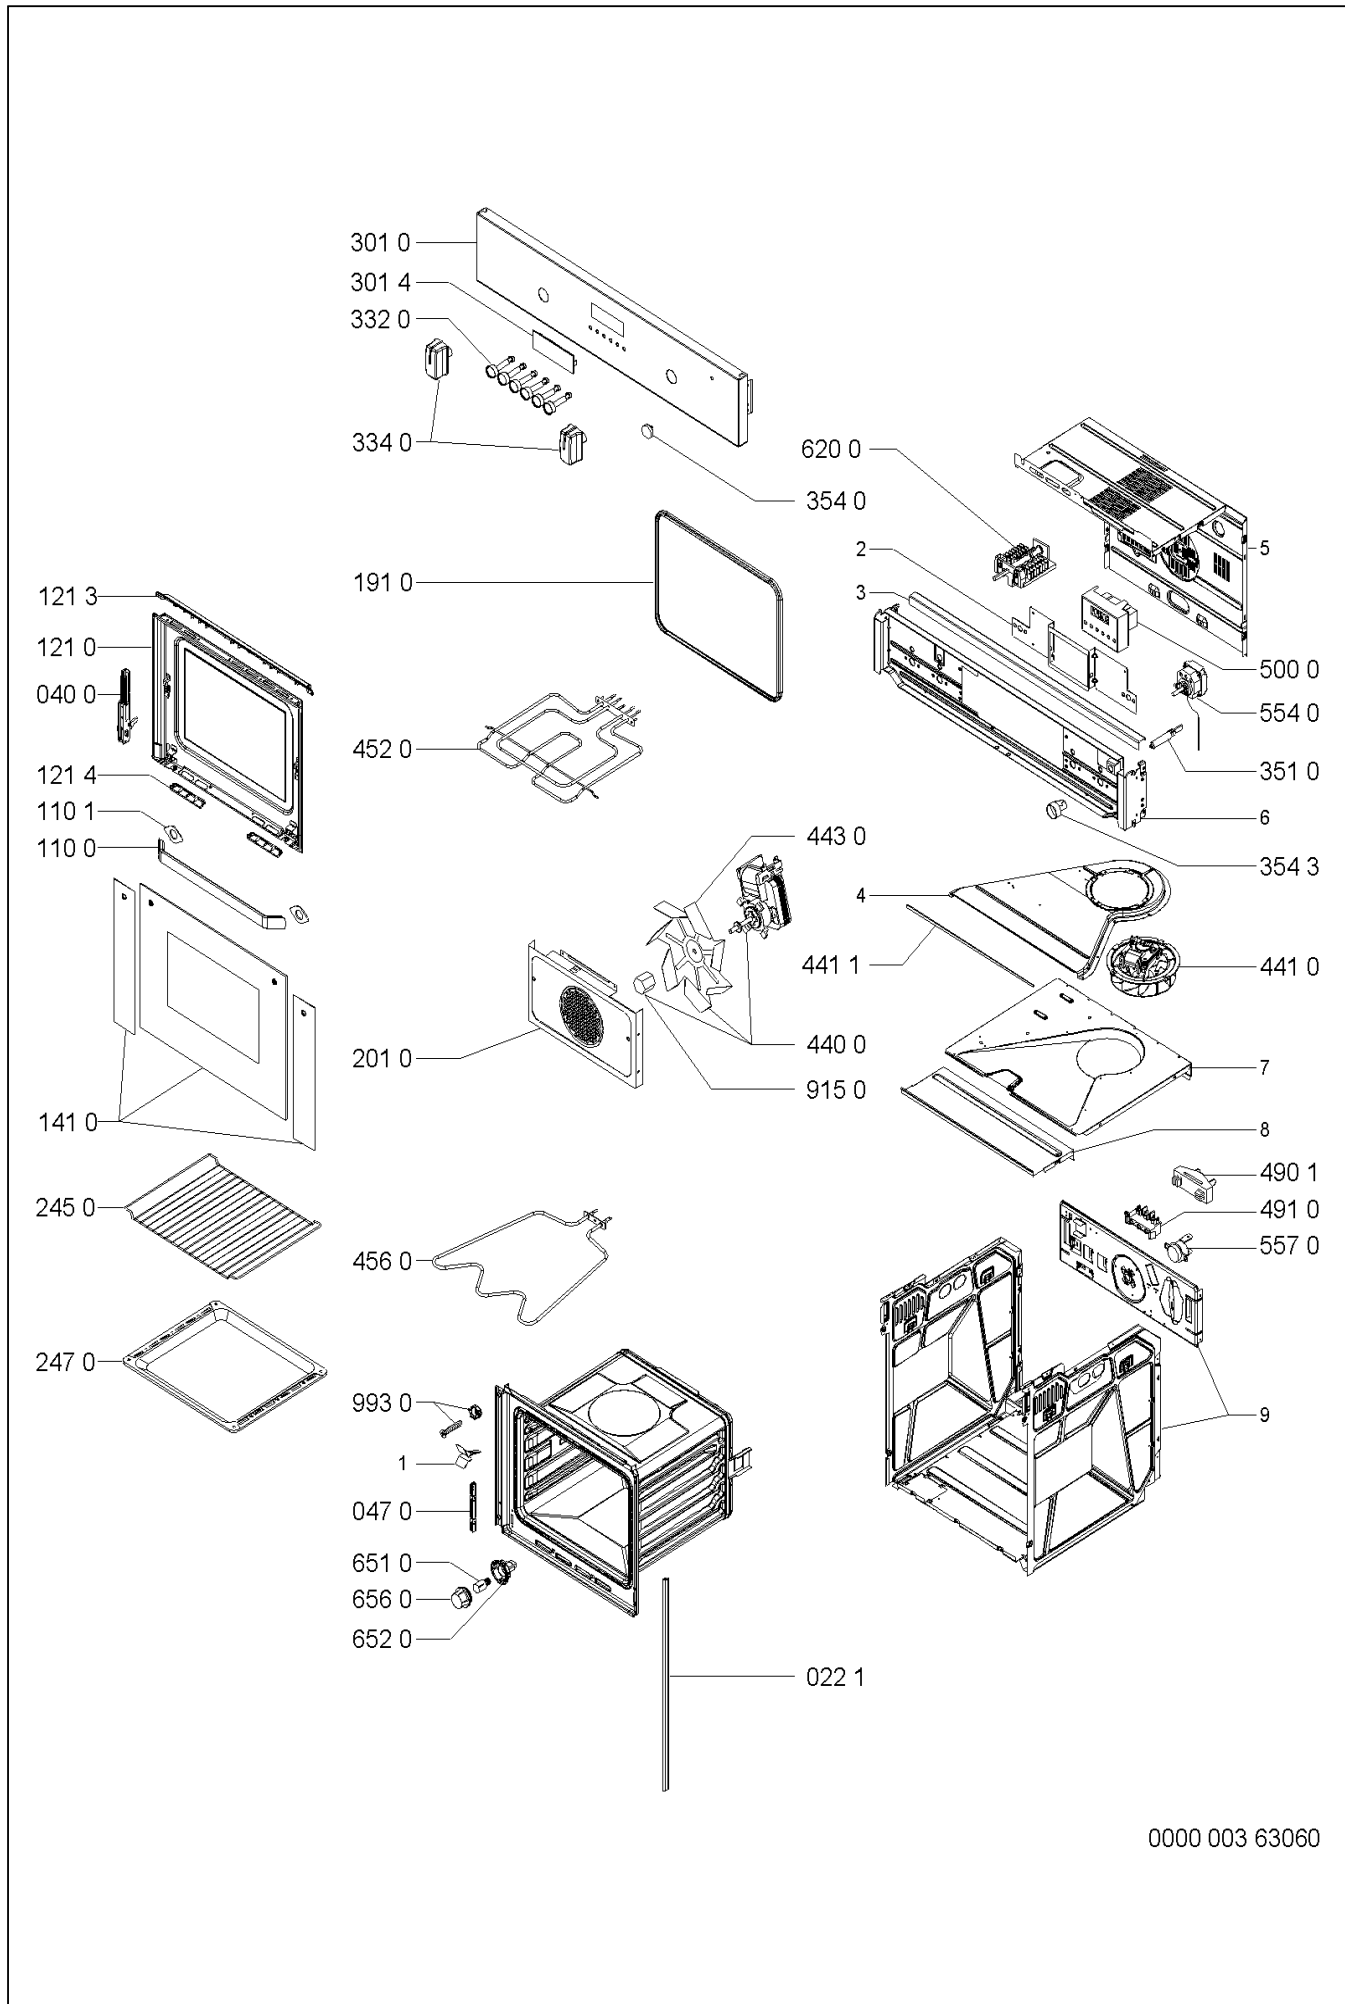

Wiring diagram

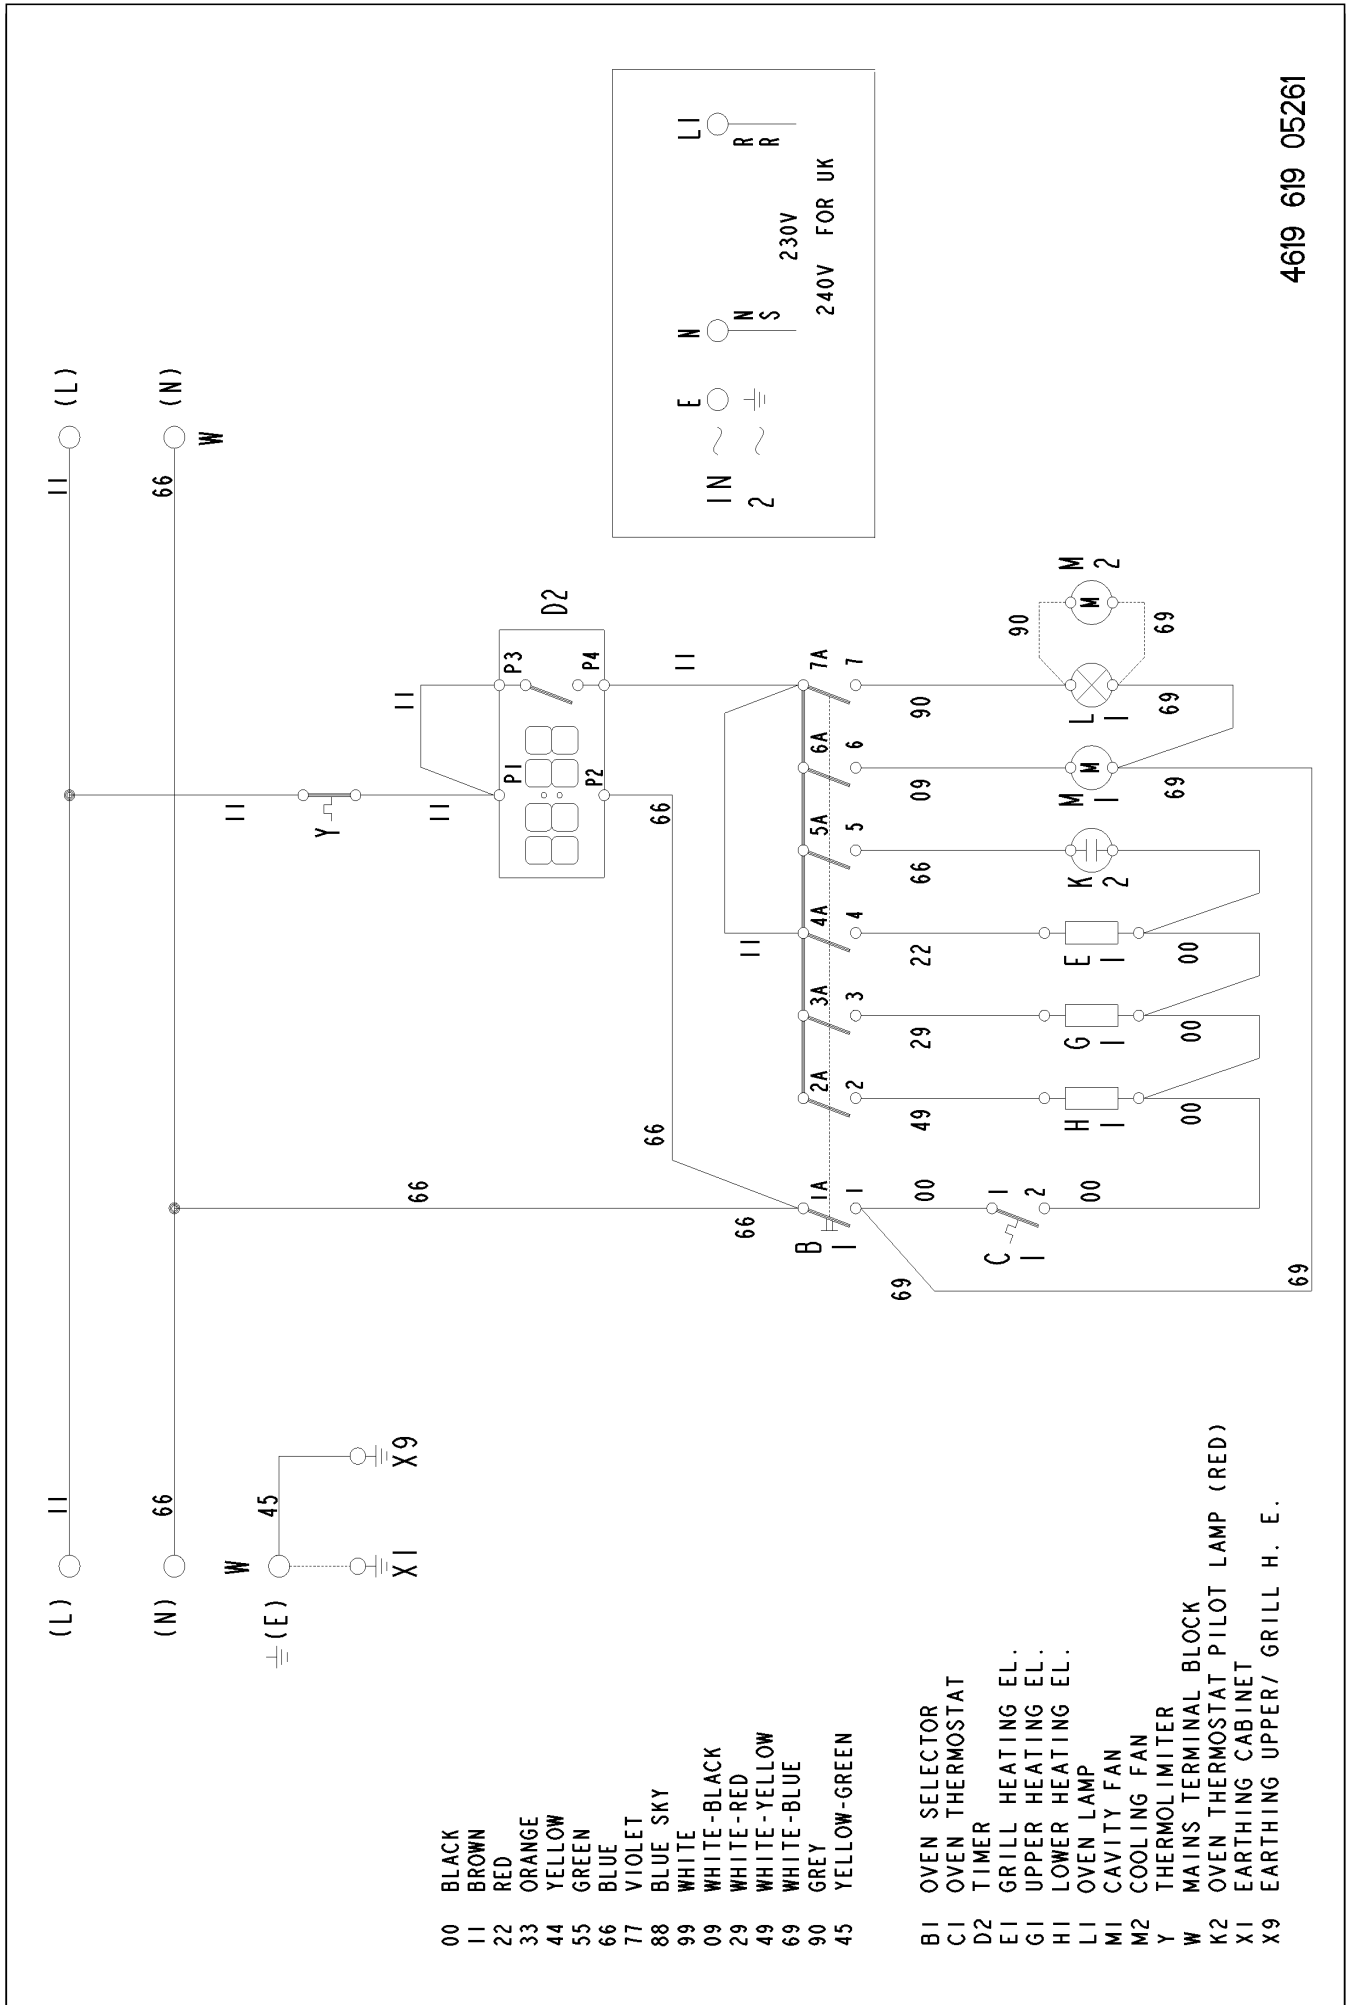


4619 619 05261

Wiring diagram

	0	1	2	3	4	5	6	
1A-1		X	X	X	X	X	X	
2A-2			X					
3A-3			X	X	X	X	X	
4A-4					X	X	X	
5A-5			X		X	X	X	
6A-6						X	X	
7A-7		X			X		X	

B1
 4619 615 06101

7819 160 10041

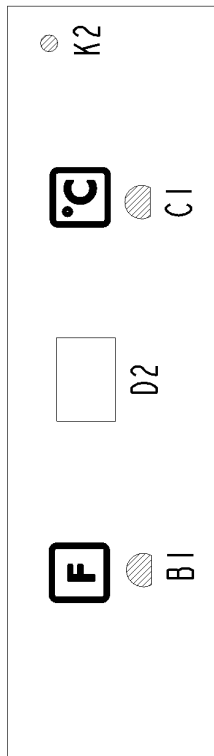

4619 619 05261