



KABEL-TUNER
CA-TV TUNER
Gruppo AF per TV via cavo

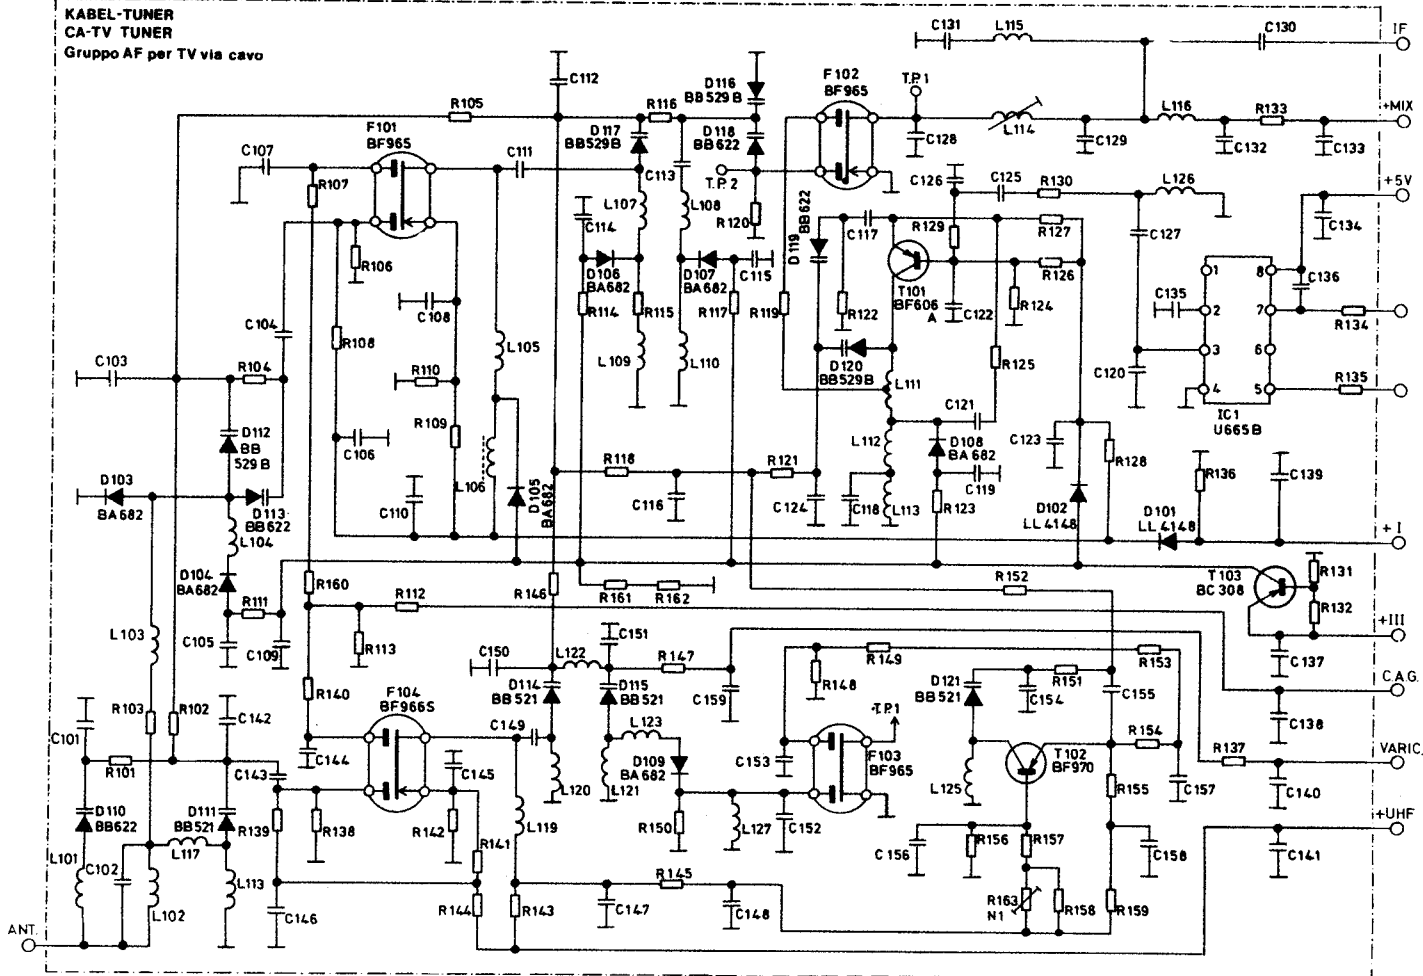

Presa Peri-TV
Peri-TV Socket
Peri-TV Buchse

1	Uscita audio destra	AF right output	NF rechts Ausgang	0.5 Veff / 1 Kohm
2	Ingresso audio destra	AF right input	NF rechts Eingang	0.5 Veff / 10 Kohm
3	Uscita audio sinistra	AF left output	NF links Ausgang	0.5 Veff / 1 Kohm
4	Massa audio	Ground	Masse NF	
5	Massa segnale blu	Ground blue	Masse Blau-Signal	
6	Ingresso audio sinistra	AF left input	NF links Eingang	0.5 Veff / 10 Kohm
7	Ingresso segnale blu	Blue input	Blau-Signal Eingang	0.7 Vpp / 75 ohm
8	Tensione funzione AV	Switching voltage	Umschaltspannung	12 V
9	Massa segnale verde	Ground green	Masse Grün-Signal	
10				
11	Ingresso segnale verde	Green input	Grün-Signal Eingang	0.7 Vpp / 75 ohm
12				
13	Massa segnale rosso	Ground red	Masse Rot-Signal	
14				
15	Ingresso segnale rosso	Red input	Rot-Signal Eingang	0.7 Vpp / 75 ohm
16	Ingresso soppressione	Blanking input	Blanking Eingang	1 - 3 V / 75 ohm
17	Massa segnale-video FBAS	Ground CCS	Masse Blanking	
18	Massa soppressione	Ground blanking	Masse Blanking	
19	Uscita segnale video FBAS	CCS output	FBAS-Signal Ausgang	1 Vpp / 75 ohm
20	Ingresso segnale video FBAS	CCS input	FBAS-Signal Eingang	1 Vpp / 75 ohm
21	Massa	Ground	Masse	

INFRAROT F.B.
I.R. REMOTE CONTROL
TELECOMANDO I.R.

