

2 THE BUILT-IN LITHIUM BATTERY

1. GENERAL DESCRIPTION

A built-in rechargeable lithium battery maintains the operation of the built-in clock when the Movie Camera is turned off. When the Movie Camera is in operation, this battery is charged automatically.

However, if the Movie Camera is not used for a very long time, the lithium battery can become exhausted. In this case, the "⊗" Indication in the Viewfinder flashes and the date returns to the initial Indication "1.1.1990".

2. HOW TO CHARGE THE LITHIUM BATTERY

■ How to Charge the Built-in Lithium Battery

If the "⊗" Indication in the Viewfinder flashes for approx. 10 seconds when you turn the Movie Camera on, the lithium battery is exhausted and must be charged as follows:

1. Connect the Movie Camera to the AC Adaptor and leave it in this condition for several hours. It is not necessary to turn the Movie Camera on.
 - After the lithium battery has been charged for approx. 8 hours, it can maintain the operation of the clock for approx. 3 months.
 - After charging the lithium battery, the "⊗" Indication still flashes to remind you to set the date and time as explained in the Operating Instructions.

3. HOW TO REPLACE THE LITHIUM BATTERY (PROCEDURES)

1. Remove the EVF C.B.A. from Rear Case.
(Remove the 4 Screw from Rear Frame)
2. Unsolder the Lithium battery "VL2020/1HF" and then replace the new one. (See Fig. B1)

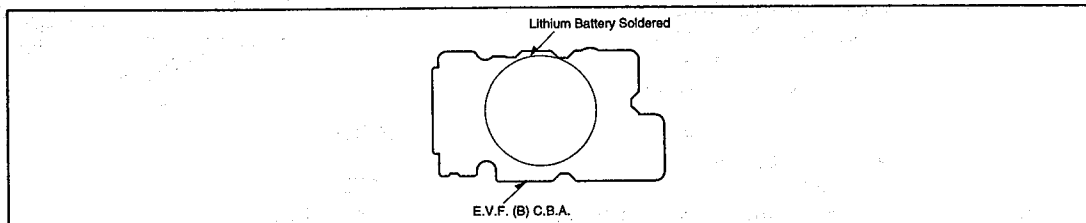


Fig. B1

NOTE :

The lithium battery is a critical component (Type No.: VL2020/1HF Manufactured by Panasonic.)

It must never be subjected to excessive heat or discharge.

It must therefore only be fitted in equipment designed specifically for its use.

Replacement batteries must be of the same type and manufacturer.

They must be fitted in the same manner and location as the original battery, with the correct polarity contacts observed.

Do not attempt to re-charge the old battery or re-use it for any other purpose.

It should be disposed of in waste products destined for burial rather than incineration.

CAUTION

Danger of explosion if battery is incorrectly replaced. Replace only with the same or equivalent type recommended by the equipment manufacturer.

Discard used batteries according to manufacturer's instructions.

ADVARSEL!

Lithiumbatteri-Eksplosionsfare ved fejlagtig håndtering.

Udskiftning må kun ske med batteri
af samme fabrikat og type.

Levér det brugte batteri tilbage til leverandøren.