

Text/Legend

SC1 Tatty VBL-B	Test Program	4619 752 30401
------------------------	---------------------	-----------------------

- | | | |
|---|-----------------------|---|
| 1 | → Select program | Drain |
| 2 | → Start test program | Press PB1 twice, then PB2 twice and then the „Start“ button |
| 3 | → Indication elements | temperature display indicates 60 °C
speed LEDs – only for max. speed is shine
LEDs of PB1 and PB2 are shine
all LEDs of program sequence indicator are shine |
| 4 | → Go to next step | Push the buttons like shown in the table Nr.1 |
| 5 | → Finish test program | Move the program selector from the DRAIN position |

Attention: Use the test program only without laundry !

Table Nr. 1 - Testprogram for Whirlpool SC1 timer VBL version

Position of timer	Program sequence LED's							Detergent box	Inlet / Outlet	Max temp.	Duration (" = sec) (' = min)	Movement of drum	Advance condition	Advance by option button (Press slowly 2 times)	Checking
	Pre-wash	Main-wash	Rinse	Rinse hold	Spin-ning	Aqua-stop									
-	X	X	X	X	X			-				no movement	↓	PB 3	PB 1, PB 2
6	X	X	X	X	X	X	pre wash	fill		60"	no movement		PB 3	PB 3	
8							main wash	(hot) fill	hot fill	60"	no movement		PB 4 **, PB 1	PB 4, mainwash fill, hot fill N1	
16		X	X	X	X	fill			6'	gentle wash	N 1			door lock LED is flashing --> Tachometer failure (motor wiring)	
18						fill				gentle wash	60"	PB 1			
20						(fill)		90°C	55'	gentle wash	till 90°C - time unknown	PB 1		heating, NTC leakage	
23			X	X	X	bleach *				tums right	3"				
27						softener	fill		tums left	60"	PB 5 ** or PB 1	PB 5, bleach fill			
28				X	X	-	pump		gentle wash	N 1	PB 1		pump, N1		
29					X	-	pump		0 - 95 rpm	4", N 1			pump		
						-	pump		select. Speed	300", N 1	PB 1		motor - spinning		
5						-					∞				

Position of timer is not visible, X – LED is ON

* Either for 4 chamber detergent dispenser "bleach compartment" or for 3 chamber detergent dispenser "main wash" compartment is filled.

** If PB 4 / PB 5 / PB 6 are present, then they have to be used to advance to next step, before advance condition come into being, if not - use PB1 instead.


Text/Legend

SC1 Tatty VBL-B

Test Program

4619 752 30401

Operating elements - distribution

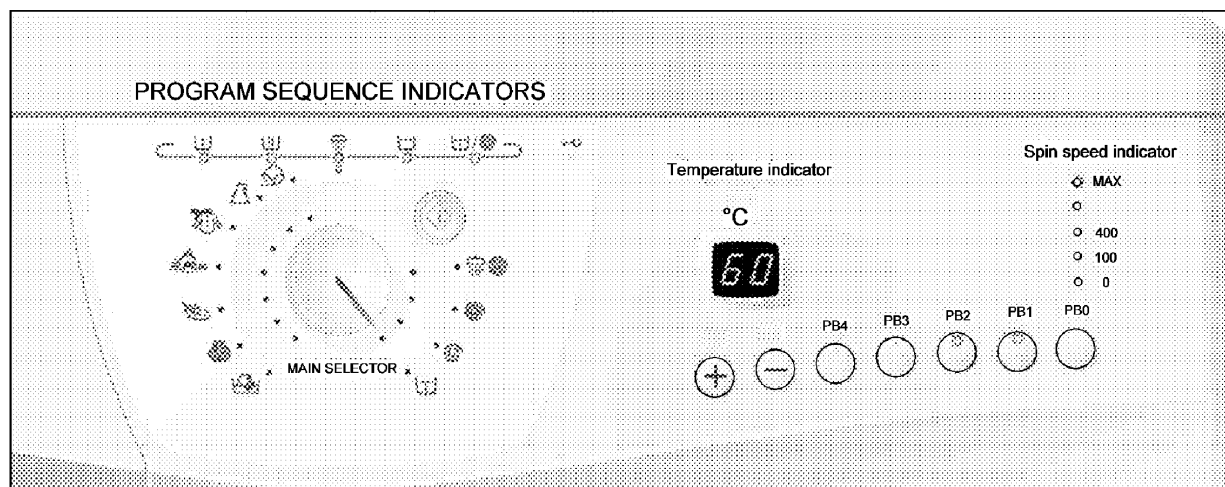

Failure codes for Whirlpool SC1 timer VBL version

speed LEDs max 0	failure	Detected failure	To be checked
○○○○●	FH	No water inlet	Water Tap / Valve / Flowmeter / Pressostat
○○○●○	FA	Aquastop failure	Aquastop switch
○○○●●	FP	Drain failure	Drain pump / Pressostat
○○●○○	F05	NTC failure (SC / OC)	NTC
○○●●○	F06	Tachometer failure (no motor movement)	Motor / Tachometer
○○●●●	F07	Triac short circuit detection	Control unit, Motor
○●○○○	F09	Overflow failure	Pressostat
○●○●●	F11	Communication failure	Control unit, I2C bus
○●●●○	F14	EEPROM failure	Control unit
●○○○○	F16	Control failure	Control unit
●○○●○	F18	Control failure	Control unit
●○●○○	F20	Control failure	Control unit
●○●○●	F21	Control failure	Control unit